
Satisfy Professional's Needs

Cordless Magnetic Light
ML013G / DML819

XGT 40V max Li-ion

18V LITHIUM-ION

Lights up anywhere with a powerful magnet

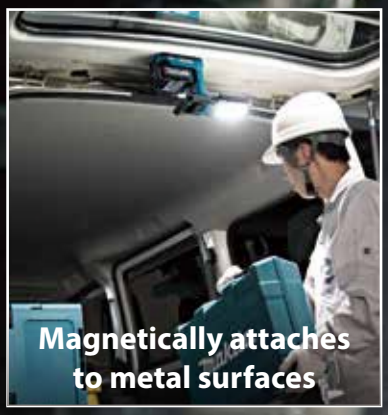

Magnetically attaches to metal surfaces



Hangs with the hook

Compact design for easy attachment in tight spaces

Max. luminous flux:
1,200 lm



XGT 40V max Li-ion

ML013G




18V LITHIUM-ION

DML819

XPT

XGT 40V max Li-ion

18V LITHIUM-ION

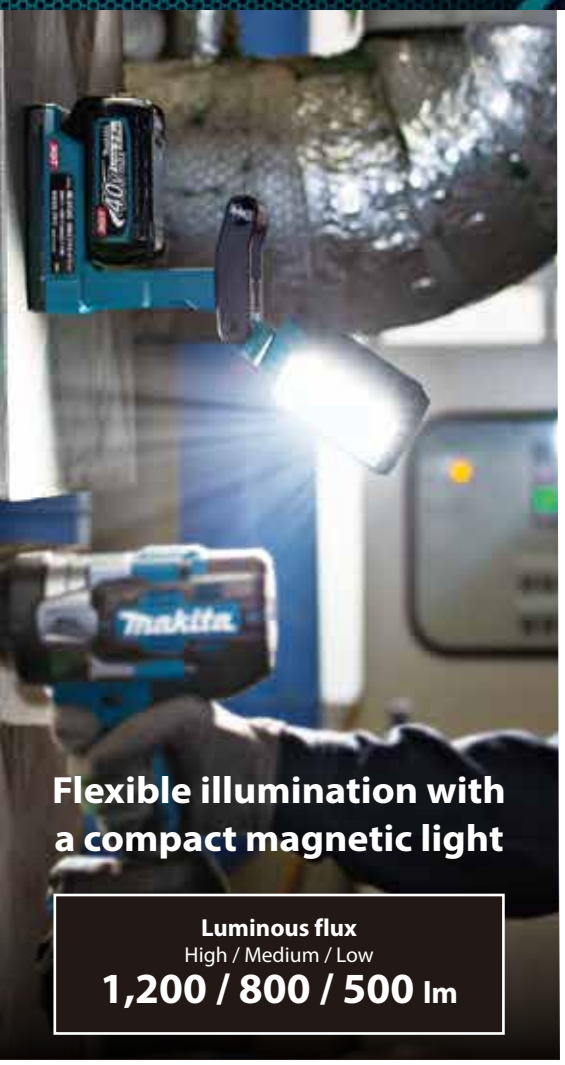

Flexible illumination with a compact magnetic light

Luminous flux
High / Medium / Low
1,200 / 800 / 500 lm



XPT



ML013G

40V max Li-ion

Lightweight at 1.6 kg with BL4020

DML819

18V LITHIUM-ION

Lightweight at 1.2 kg with BL1815N

Foldable rotating LED head

Flexible angle adjustment for various applications



300° horizontal
90° right / 210° left



180° vertical
Auto shut-off when the light surface is folded inward.

Folds down to an even more compact size.



Accessories

For attachment to scaffolding and similar frames.

Adapter for vise
Part No. TD00000167



Vise
Part No. GM00001396





Magnet cover

Avoids magnetic attachment and metal adhesion.
Part No. TD00000204





Metal hook

Allows hanging on pipes up to 50 mm in diameter.



Charging Time

ML013G (40V max Li-ion)	Fast Charging DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
BL4040/F 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min

DML819 (18V LITHIUM-ION)	Fast Charging DC18RC	DC18SD
BL1815N 1.5Ah	15 min	30 min
BL1820B 2.0Ah	24 min	45 min
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min
BL1890 9.0Ah	85 min	200 min
BL1812 12.0Ah	120 min	265 min

Cordless Magnetic Light

ML013G / DML819

LED type	*Color temperature: 5,000 K*
Luminous flux	*High / Med. / Low: 1,200 / 800 / 500 lm*
Illuminance	*at 0.5m from the light source, High / Med. / Low: 1,750 / 1,150 / 700 lx*
	at 1.0m from the light source, High / Med. / Low: 400 / 250 / 150 lx
Continuous use	*ML013G: w/ BL4040, High / Med. / Low: 12 / 18 / 29 hours*
	DML819: w/ BL1860B, High / Med. / Low: 9 / 14 / 22 hours
Dimensions (L x W x H) (Battery)	*ML013G: 196 x 91 x 161 mm (7-3/4 x 3-5/8 x 6-3/8") (BL4040)* *DML819: 178 x 91 x 161 mm (7 x 3-5/8 x 6-3/8") (BL1860B)*
Net weight (Battery)	*ML013G: 1.6 - 2.2 kg (3.5 - 4.9 lbs.) BL4020 - BL4050F* *DML819: 1.2 - 2.2 kg (2.6 - 4.9 lbs.) BL1815N_BL18120*

Standard Equipment : Magnet cover

not covered by EPTA-Procedure

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202512