Satisfy Professional's Needs

XGT

Makita® Cordless Grease Gun GP001G

XGT 40V max Li-ion

Stable discharge even under high-pressure operation



Track tensioning operation for heavy machinery

Max flow rate	Max operating pressure
350 mL/min	69 MPa

BL MOTOR XPT

XGT 40Vmax Li-ion


Delivers stable high-speed discharge under high pressure




XGT 40Vmax Li-ion + BL MOTOR

Work efficiency increased by about 175%
At high-pressure (40 MPa)
*** Compared to our 18V model**

Flow rate at high-pressure (40 MPa)
Grease used: Makita grease N No. 2



Constant speed control ensures stable discharge.





Fixed-quantity discharge mode

Ensures precise greasing at multiple points

Stops automatically after the preset number of strokes.

Quick, precise multi-point greasing with no need to check grease volume.









For greasing agricultural machinery and heavy equipment



Discharge speed selection [4 stages]



Flow rate [mL/min]			
Mode 1	Mode 2	Mode 3	Mode 4
145	220	290	350

Air lock detection function




Blinks when no grease is discharged after switch operation

Easier bellows cartridge replacement




Redesigned lower housing and wider opening for easier bellows cartridge changes.

Reduced air lock frequency



Shorter grease path reduces air lock during cartridge replacement.

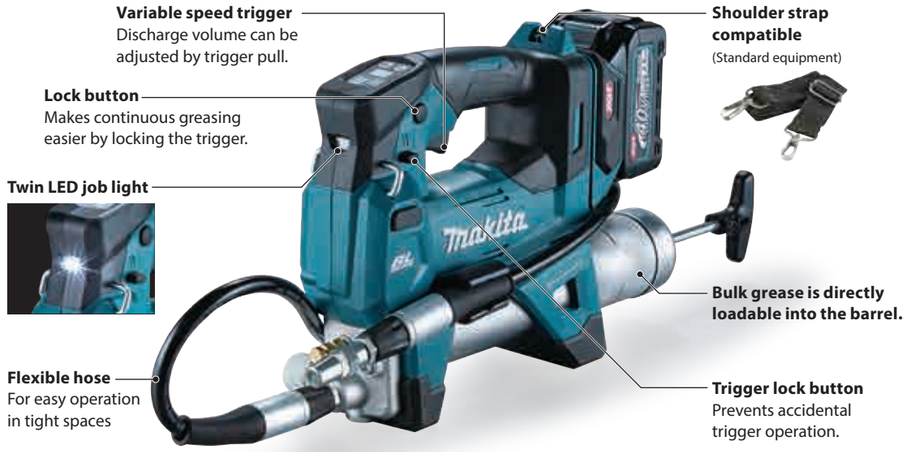

XPT

Enhanced dust and water resistance in harsh outdoor environments



Compatible with various grease cartridges

Both narrow and wide barrels are available to suit grease cartridges used in different regions.

Accessories

Adapter set

An attachment installed on the tip of the flexible hose to connect to the grease supply port.

1 pc

Part No. 1915L9-8

3 pcs

Part No. 1915M0-3





Angle adapter set

Part No. 1916U8-9

90° grease coupler for hard-to-reach grease nipples



Lock on adapter set

Part No. 1915N4-2

Locking grease coupler for a more secure connection to the grease nipple of a machine to be lubricated.





Flexible hose

Grease supply hose

1200 set

Length: 1,200 mm

Part No. 1916S5-1



600 set

Length: 600 mm

Part No. 1916S7-7





Extension pipe set

Part No. 1911M9-1

Convenient for connecting to the lubrication points in recessed places.



Loader fitting set

Part No. 1914G9-7

To pump up grease from a pail can for machine lubrication





Joint set

Part No. 1915E6-5

A joint for connecting a 500 g grease cartridge to the tool.



Charging Time

	DC40RA (Fast Charging)	DC40RC
*1 **BL4020** 2.0Ah	**22** min	**30** min
*1 **BL4025** 2.5Ah	**28** min	**38** min
*1 **BL4040/F** 4.0Ah	**45** min	**67** min
BL4050F 5.0Ah	**50** min	**85** min
BL4080F 8.0Ah	**76** min	**170** min

*1 Recommended battery

Cordless Grease Gun

GP001G

- Variable Speed
- Brake
- Anti-restart function
- Constant Speed
- Built-in Job Light
- Carrying Case

Grease capacity w/ Barrel A	*Cartridge / Bulk: 410 / 455 g (14.5 / 16.0 oz)*
Flow rate	*Mode 1: 145 mL/min (5.0 oz/min)*
	Mode 2: 220 mL/min (7.5 oz/min)
	Mode 3: 290 mL/min (10.0 oz/min)
	Mode 4: 350 mL/min (12.0 oz/min)
Applicable grease (NLGI grade)	*No.0 - No.2*
Max operating pressure	*69 MPa (10,000 psi)*
Flexible hose length	*1,200 mm (47-1/4")*
Vibration level	*2.5 m/s² or less (EN62841-1)*
Uncertainty (K) for Vibration	*1.5 m/s² (EN62841-1)*
Sound pressure level	*81 dB (A) (EN62841-1)*
Sound power level	*89 dB (A) (EN62841-1)*
Uncertainty (K) for Noise	*3 dB (A) (EN62841-1)*
Dimensions (L x W x H)	*395 x 112 x 245 mm (15-1/2 x 4-3/8 x 9-5/8")*
(Battery)	*BL4025*
Net weight	*5.2 - 6.5 kg (11.5 - 14.3 lbs.)*
(Battery)	*BL4020 - BL4080F*

Standard Equipment : Shoulder belt, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination are shown in the table.

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202509

www.makita.com