


# PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: April 5<sup>th</sup>, 2022

Item number:	<b>10405263</b>
Product name:	<b>SUPER EG Mersey Bright, Oak, UV lacquer, matt</b>

## Picture

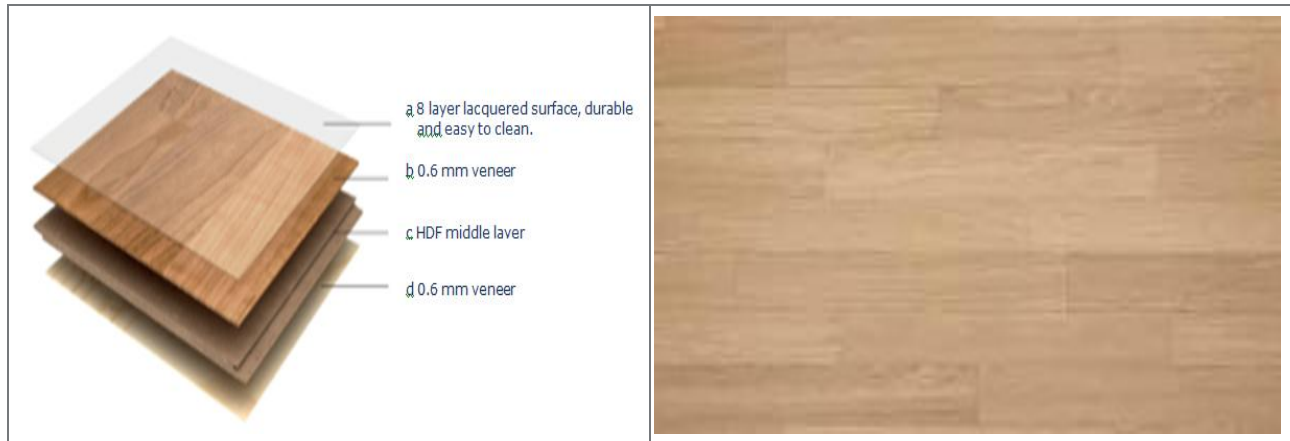

Picture no. 1

Picture no. 2

## Product description

Appearance	-
Classification ac. To EN 13489	Free Classic
Pattern of surface	1-strip
Finishing	Deep brushed
Bevel	0.5 mm short sides, 1.5 mm long sides
Lacquer	German manufacturer, gloss 2-4°
Hardness	Hard wood
Floor heating installation	Yes, max. 27°

## Dimensions

Length	2050 mm	<input checked="" type="checkbox"/> Cleaning and maintenance instructions – <a href="http://www.moland.dk">www.moland.dk</a>
Width	233 mm	<input type="checkbox"/> Can be used for eco-label construction.
Thickness	10 mm	<input type="checkbox"/> FDV-documentation – <a href="http://www.moland.dk">www.moland.dk</a>
Top layer	0.6 mm	<input type="checkbox"/> FSC <input checked="" type="checkbox"/> PEFC
Split boards	-	

# PRODUCT DESCRIPTION

Moland engineered wood flooring



Date: April 5<sup>th</sup>, 2022

## Technical specification

Dimension	10 x 233 x 2050 mm	Delamination	Not allowed
Top layer	0.4 - 0.6 mm	Torn grain	Not allowed
HDF	8.8mm +/- 0.1mm	Colour on bevel and surface	Homogenes expression
Bottom layer	0.4 - 0.6 mm	Pressure marks	Not allowed
Locking method end	Unifit-X	Product marking	CE, PEFC
Locking method long side	Uniclic	Boards per packet/ m <sup>2</sup>	5 boards = 2.39 m <sup>2</sup>
Fire class	C <sub>fl</sub> - s1	Packet per pallet/ m <sup>2</sup>	44 packets = 105.083 m <sup>2</sup>
Formaldehyde content	E1	Origin of top layer	EU
Thermal conductivity	0.11 W/mk		

## Production tolerance

Moisture content	6% + -2%
Height difference	± 0.2 mm, 0.3mm to a limited extent
Width	± 0.2 mm
Length	± 0.1 %
Squareness	≤ 0.2 % over the width
Crosswise bending	± 0.2 % over the width
Longitudinal bending	± 1% of the length
Spring across the element	≤ 0.1% over the length

## Grading


Fresh knots	≤ 10mm, max. 3 pcs. Pr. m <sup>2</sup> , spread in packs
Cracked filled knots	Not allowed
Dead knots	Not allowed
Dark lines	Limited – accepted in 5% of cases
Cracks	Not allowed
Bark pockets	Not allowed
Sapwood	Not allowed
Structure variation	Crown cut – full to half crown
Color variation	Natural wood variation is accepted – color variation between batches is possible
Worm hole	Not allowed
Blue stained	Not allowed
Rot	Not allowed

## Packing

# PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: April 5<sup>th</sup>, 2022

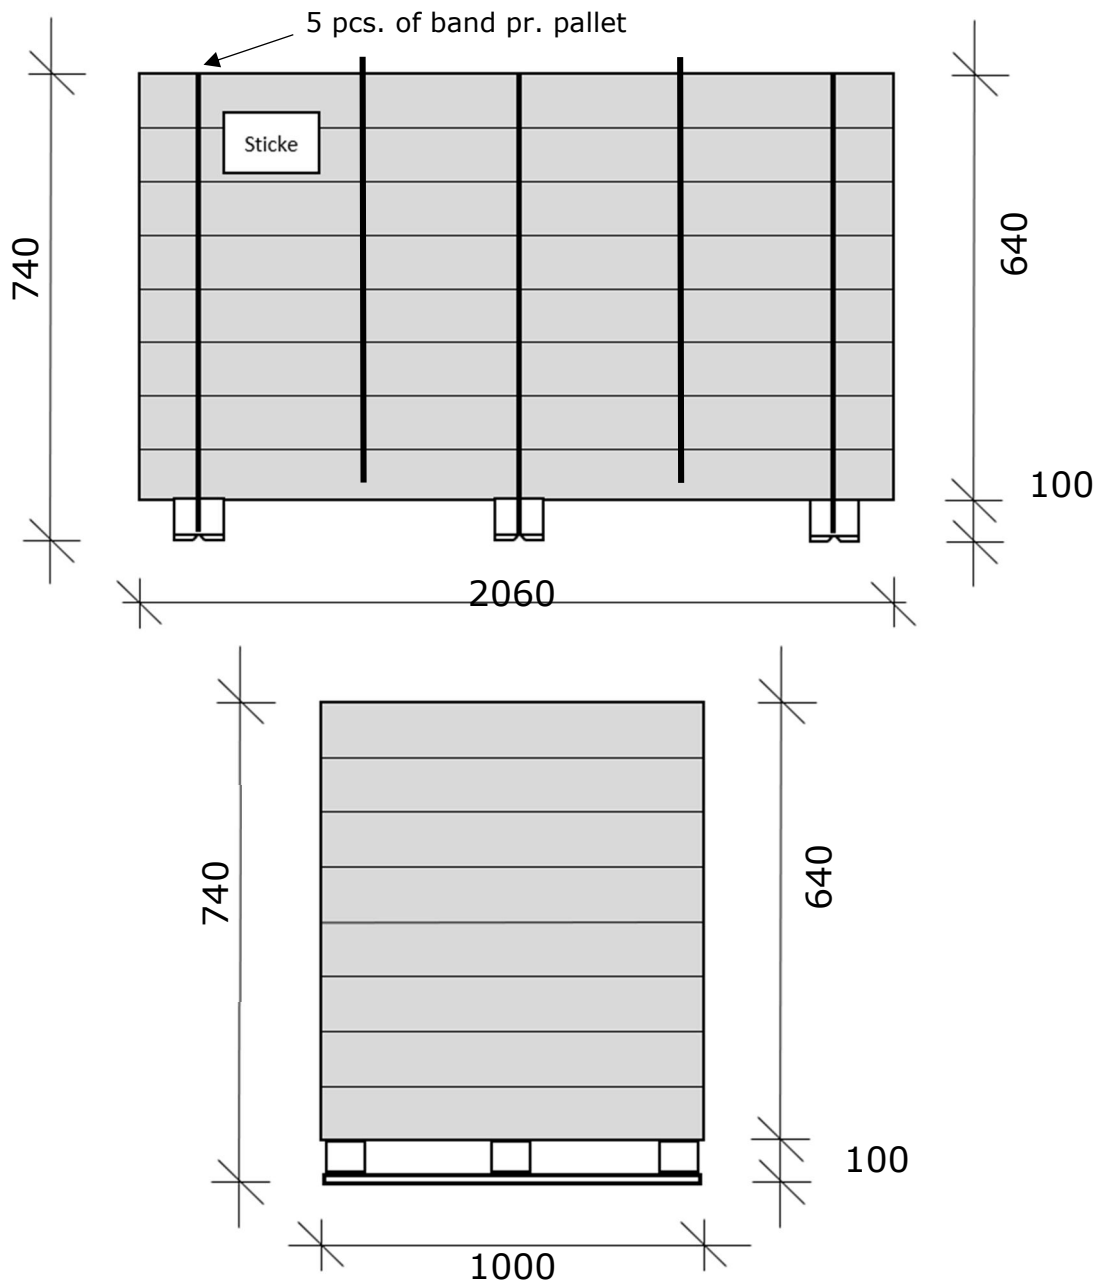

## Pallets Fumigated

Number of boards per pack	5 Boards
M <sup>2</sup> / pack	2.39 m <sup>2</sup>
Packs / pallet	44 Packs
Layer / pallet	11 layers
M <sup>2</sup> / pallet	105.083 m <sup>2</sup>