


# PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Aug. 2019

Item number:	<b>13187264, 13187264-1</b>
Product name:	<b>Moland Burghley Wideplank, Oak</b>

## Picture

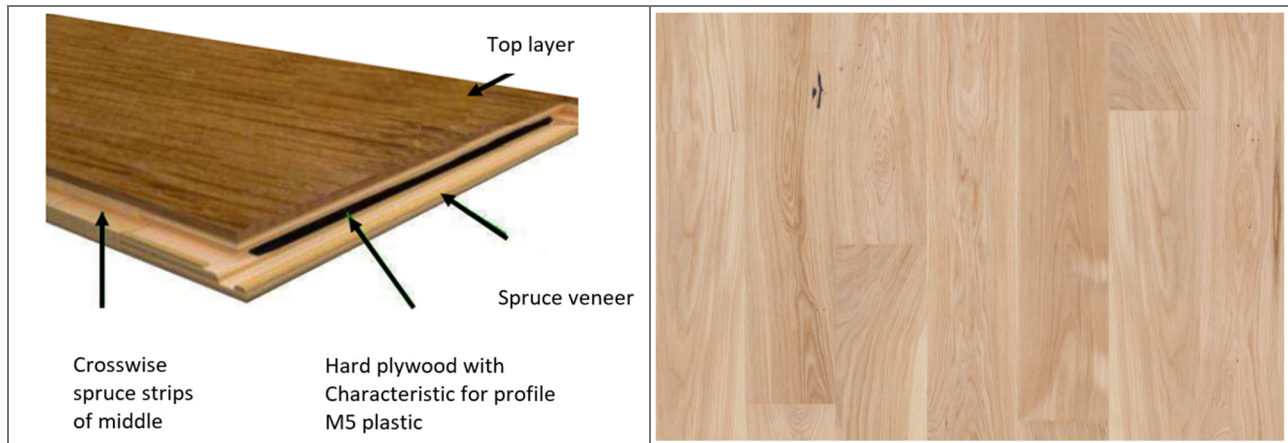

Picture no. 1

Picture no. 2

## Product description

Appearance	-
Classification ac. To N13489	Free Class, Trend
Pattern of surface	1 strip
Finishing	Finished 5 layers of acrylic pavè white matt lacquer UV hardened
Lacquer	UV Matt lacquer, pavè white, Gloss 9-12
Oil	-
Hardness	Hard wood
Floor heating installation	Yes, max. 27°

## Dimensions

Length	2200 mm	<input checked="" type="checkbox"/> Cleaning and maintenance instructions – <a href="http://www.moland.dk">www.moland.dk</a>
Width	180 mm	<input type="checkbox"/> Can be used for eco-label construction.
Thickness	14 mm	<input type="checkbox"/> FDV-documentation – <a href="http://www.moland.dk">www.moland.dk</a>
Top layer	2,5 mm	

## Lamel sizes

<ul style="list-style-type: none"><li>- One board in a pack can have up to -20mm in length.</li><li>- Two boards in a pack can have up to -10mm in length.</li></ul>
--

# PRODUCT DESCRIPTION

Moland engineered wood flooring



Date: Aug. 2019

## Technical specification

Dimension	14x180x2200 mm	Delamination	Not allowed
Top layer	2,5 mm	Torn grain	Not allowed
Middle layer	9 mm	Colour on bevel and surface	Homogeneous expression
Bottom layer	2,5 mm	Pressure marks	Not allowed
Locking method end	M5	Product marking	CE, FSC
Locking method longside	M5	Boards per packet/ m <sup>2</sup>	7 or 6 boards x 2200mm + 2 boards x 1092mm = 2,77 m <sup>2</sup>
Fire class	D <sub>n</sub> - s1	Packet per pallet/ m <sup>2</sup>	40 packets = 110,8m <sup>2</sup>
Formaldehyde content	E1		
Thermal conductivity	0,11 W/mk		

## Production tolerance

Moisture content	7% + -2%
Height difference	≤ 0,2 mm, 0,3 mm to a limited extent
Width	± 0,2 mm
Length	± 0,1%
Squareness	± 0,2% over the width
Crosswise bending	± 0,2% over the width
Longitudinal bending	± 1% of the length
Spring across the element	≤ 0,1% over the length

## Grading


Fresh knots	Acceptable, without limit	
Cracked filled knots	Black unsound (fillet with dark brown putty.)	
Dead knots	≤ 55 mm diameter / filled with dark brown putty.	
Dark lines	Allowed - moderately	
Cracks	Not allowed	
Bark pockets	Allowed	
Sapwood	Acceptable, without limit	
Structure variation	Allowed	
Color variation	Allowed	
Worm hole	Not allowed	
Blue stained	Not allowed	
Stain (discoloration)	Not allowed	
Rot	Not allowed	

# PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: Aug. 2019

## Packing

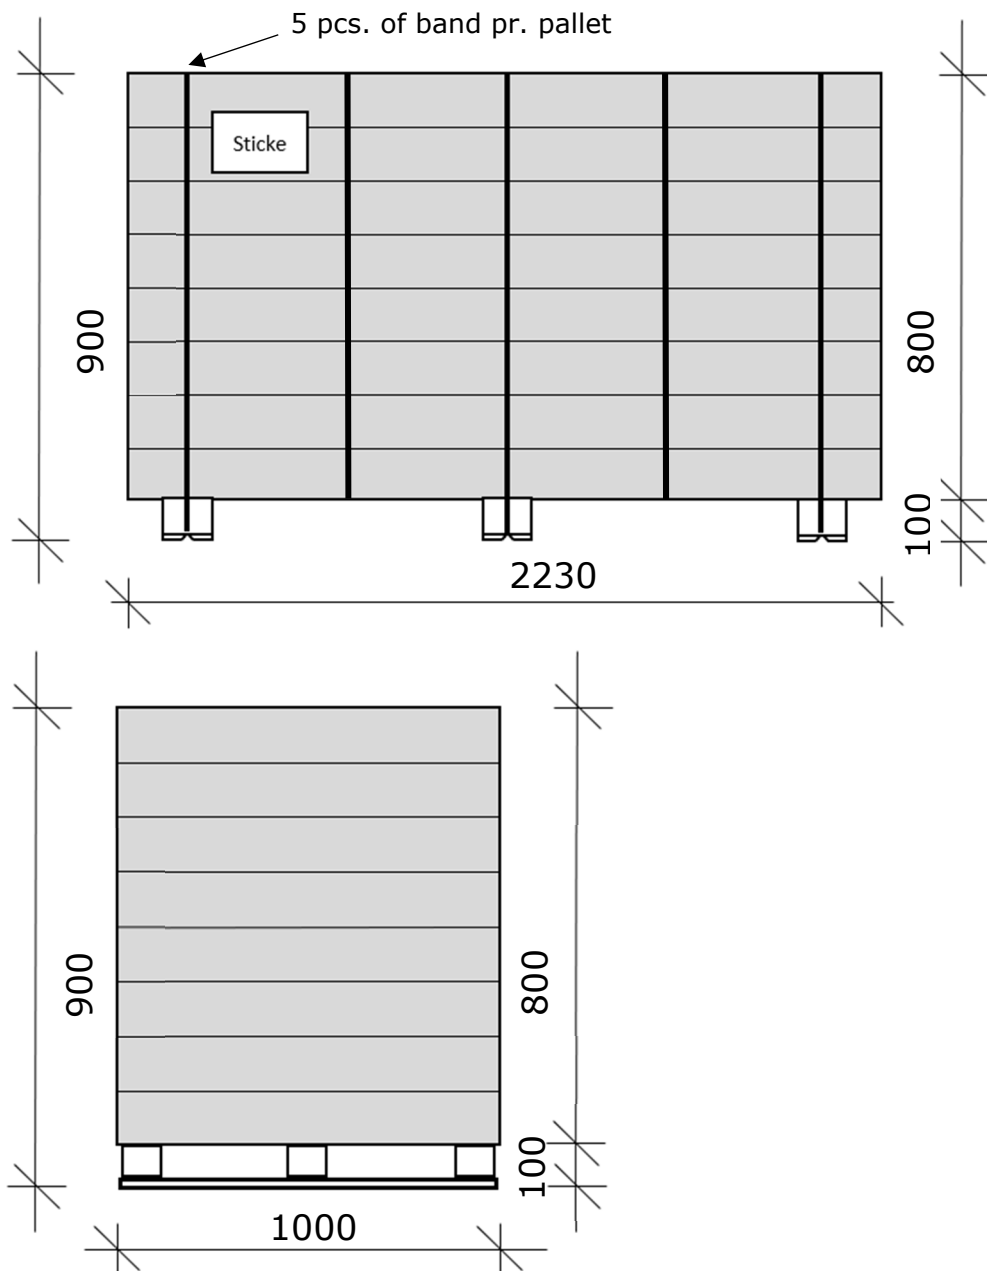

## Pallets

Number of boards per pack	7 boards
M <sup>2</sup> / pack	2,77 m <sup>2</sup>
Packs / pallet	40 packs
Layer / pallet	8 layers
M <sup>2</sup> / pallet	110,8 m <sup>2</sup>