


PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: February 8th, 2023

Item number:	14251241
Product name:	Swedish pine, Lye & hard wax oil

Picture

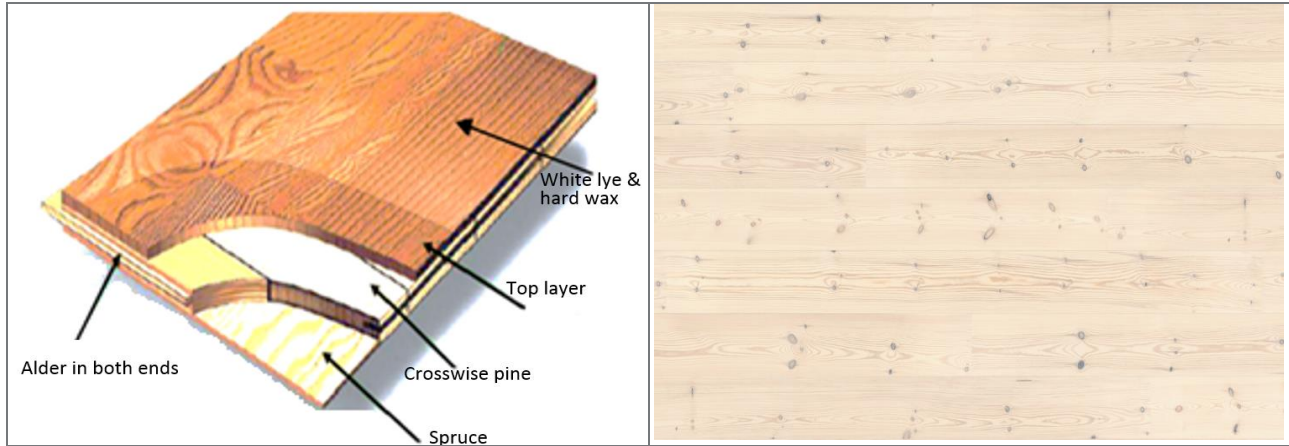

Picture no. 1

Picture no. 2

Product description

Appearance	-
Classification	Classic
Pattern of surface	1-strip
Finishing	Hard wax oil, white
Bevel	0.2mm bevel on long sides and no bevel in the ends.
Oil / Lacquer	Faxe oxidative hard wax oil, gloss 4 ± 2°
Hardness	Soft wood
Floor heating installation	Yes, max. 27°

Dimensions

Length	2390 mm	<input checked="" type="checkbox"/> Cleaning and maintenance instructions – www.moland.dk <input type="checkbox"/> Can be used for eco-label construction. <input type="checkbox"/> FDV-documentation – www.moland.dk <input checked="" type="checkbox"/> FSC <input type="checkbox"/> PEFC
Width	198 mm	
Thickness	14 mm	
Top layer	3.8 mm	
Split boards	- 2 of 6 layers may consist of 800/1600mm long boards.	

Lamel sizes

-

PRODUCT DESCRIPTION

Moland engineered wood flooring



Date: February 8th, 2023

Technical specification

Dimension	14 x 198 x 2390 mm	Wear resistance	-
Top layer	3.8 mm \pm 0.2 mm	Product marking	CE
Middle layer	8.2 mm \pm 0.2 mm	Boards per packet/ m ²	6 boards =2.839 m ²
Bottom layer	2.0 mm \pm 0.2 mm	Packet per pallet/ m ²	40 packets =113.573 m ²
Locking method end	G2 – Svedloc	Color variation	Allowed
Locking method long side	G2 – Svedloc	Delamination	Not allowed
Fire class	D _{fl} - s1	Torn grain	Not allowed
Formaldehyde content	E1	Color on bevel and surface	Homogeneous expression
Thermal conductivity	0.15 W/mk		

Production tolerance

Moisture content	7% \pm 2%
Height difference	\leq 0.2 mm, 0.3 mm to a limited extent
Width	\pm 0.1 mm (\pm 0.2mm max)
Length	\pm 0.1 %
Squareness	\leq 0.2 % over the width
Crosswise bending	\pm 0.2 % over the width
Longitudinal bending	\pm 1% of the length
Spring across the element	\leq 0.1% over the length

Grading


Fresh knots	Allowed
Cracked filled knots	\leq 40 mm Filled with brown filler; knots may be replaced with "new"
Dead knots	\leq 20 mm Filled with brown filler; knots may be replaced with "new"
Dark lines	Not allowed
Cracks	Not allowed
End cracks, filled	Not allowed
Resin pockets	\leq 4 x 40mm, max. 2 pcs. pr. m ² , spread in packs, max. 10% of boards
Sapwood	Not applicable
Structure variation	Allowed
Color variation	Allowed
Worm hole	Not allowed
Blue stained	Not allowed
Stain (discoloration)	Not allowed
Rot	Not allowed

PRODUCT DESCRIPTION

Moland engineered wood flooring

Date: February 8th, 2023

Packing

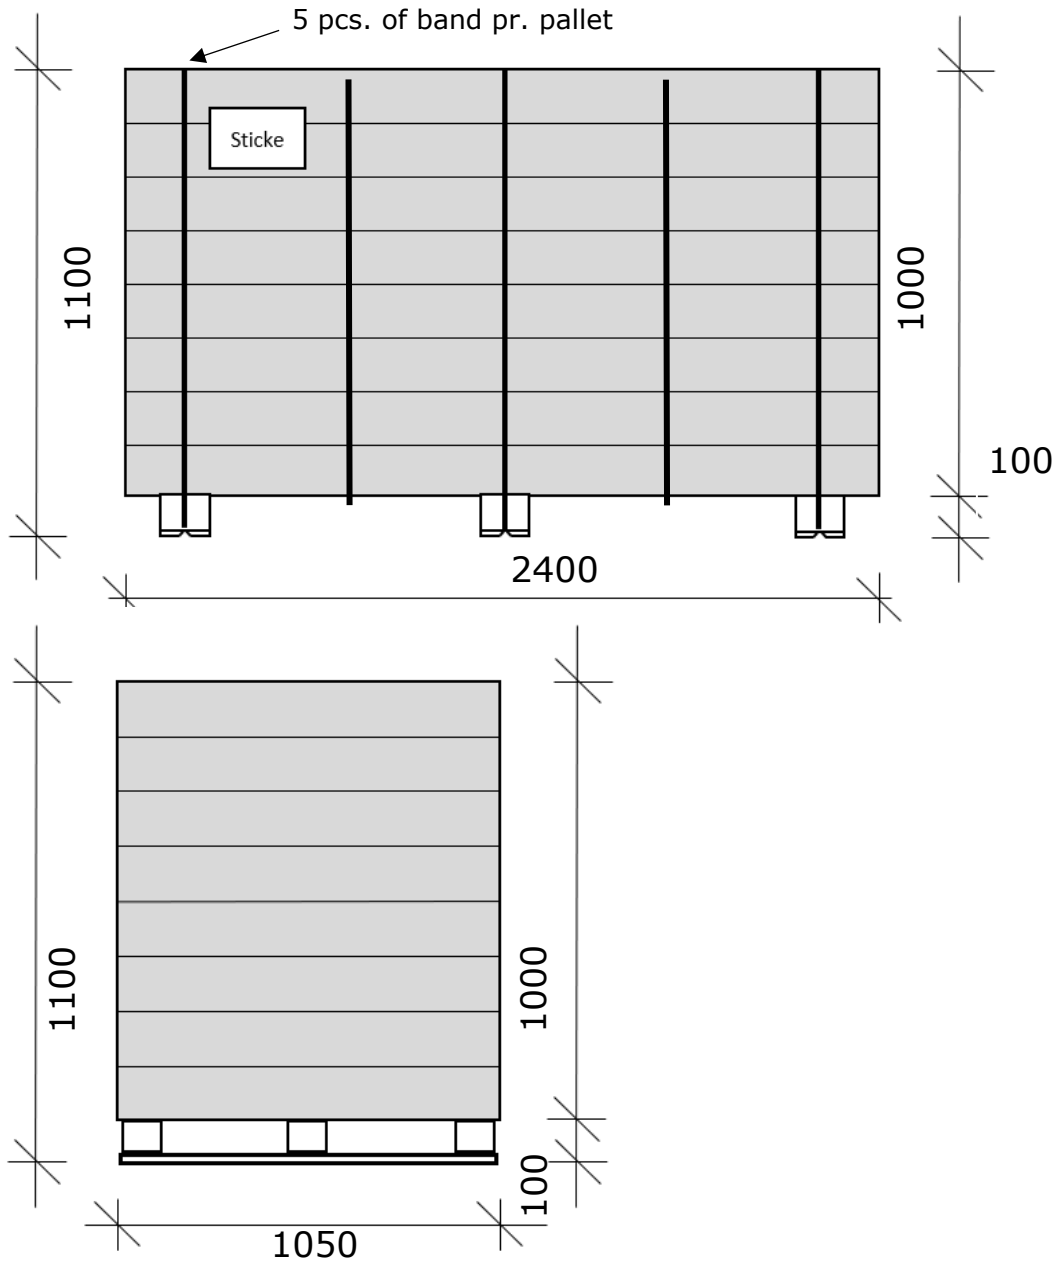

Pallets Fumigated

Number of boards per pack	6 Boards
M ² / pack	2.839 m ²
Packs / pallet	40 Packs
Layer / pallet	8 layers
M ² / pallet	113.573 m ²