


DEWALT®

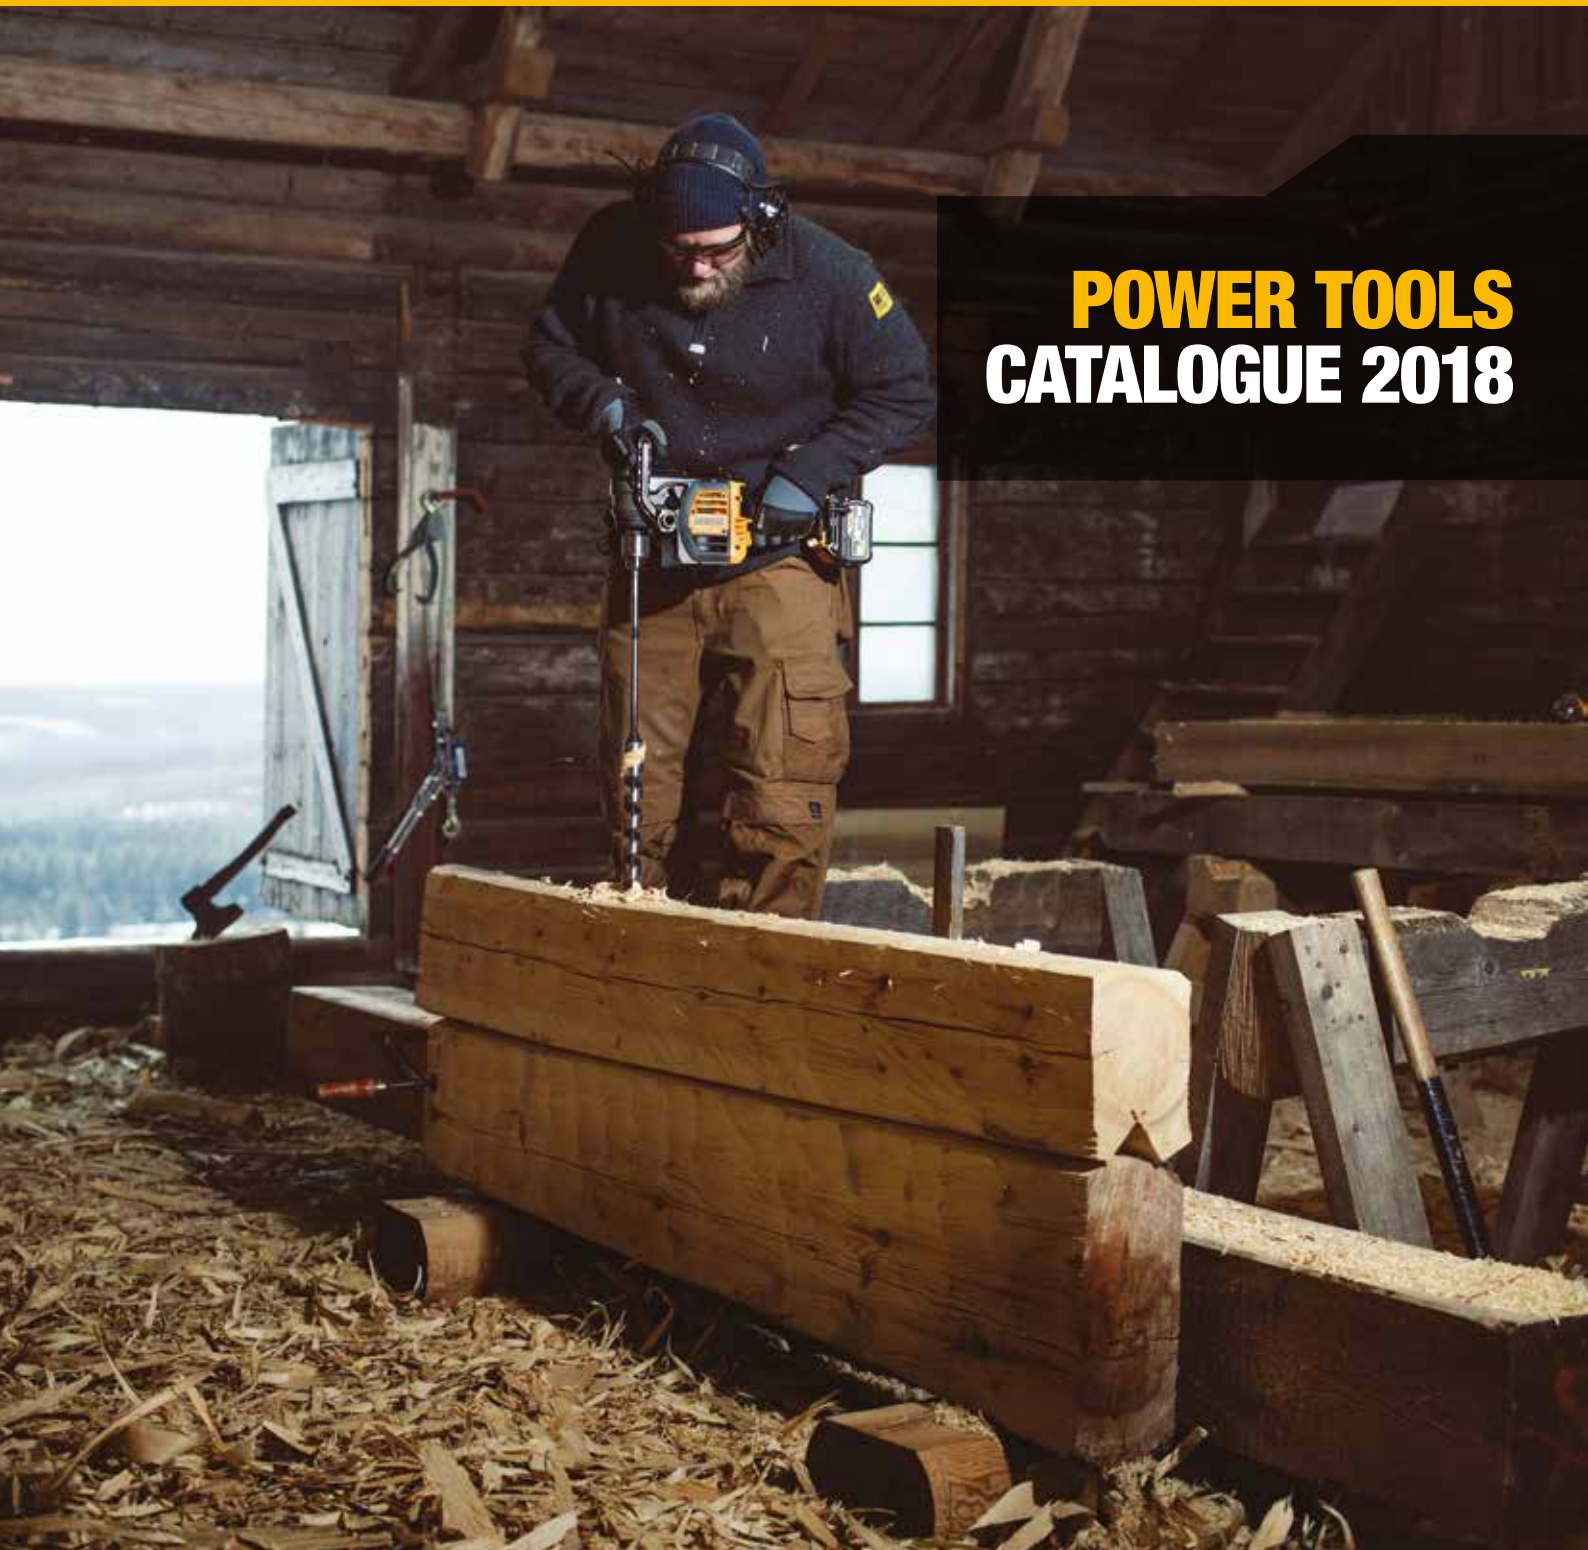

POWER TOOLS CATALOGUE 2018

GUARANTEED TOUGH.®

CONTENTS

54V XR	Page 5	METALWORKING & CONCRETE	Page 85
18V XR	Page 15	Grinders, Polishers, Tile Saws, Chop Saws	
10.8V XR	Page 43	DRILLING AND FASTENING	Page 93
LASERS & LASER DISTANCE MEASURES	Page 47	Drills & Wrenches	
HAMMERS	Page 55	DUST MANAGEMENT	Page 99
MITRE SAWS & MACHINERY	Page 63	Extractors & Accessories	
WOODWORKING	Page 73	STORAGE	Page 103
Routers, Planers, Sanders, Heatguns, Plunge Saws, Circular Saws, Jigsaws, Reciprocating Saws		TSTAK, Toughsystem & Soft Storage	
		PNEUMATIC CONSTRUCTION FASTENING	Page 115
		SERVICES	Page 134

KEY



CHISELLING MODE

Single mode for chiselling only



TWO MODE

For rotary and hammer drilling



THREE MODE

For rotary, hammer drilling and chiselling



QUICK CHANGE CHUCK

Ideal solution to change easily between SDS and 3 jaw chuck systems



KITBOX

Supplied with heavy duty carrying case



AVC ANTI-VIBRATION CONTROL



AIRLOCK



BLUETOOTH COMPATIBILITY



TSTAK



TOUGHSYSTEM



CROSS CUT POSITIONING SYSTEM



54V XR FLEXVOLT

Batteries come in a variety of different voltages and capacities



18V XR BATTERIES

Offer capacities for all needs



BRUSHLESS TECHNOLOGY

Helps to increase lifetime of both tool and battery



10.8V XR

Batteries come with a 2Ah capacity as standard

DeWALT is a market-leading manufacturer of premium power tools, accessories and anchors and fixings that provide a fully integrated system solution for various applications.

DeWALT tools offer unparalleled performance, with durable construction for a professional finish. Rely on DeWALT to get the job done, with a 3 year guarantee on most tools.

Taking cordless drilling to the next level, the newest DeWALT 54V

XR FLEXVOLT range provides true corded performance without the restrictions of the cord. With Brushless motors and Perform & Protect low vibration levels, these tools set the new standard on the jobsite.

With over 100 tools in the range the 18V XR Lithium-Ion battery platform is the biggest and fastest growing in our range. All 18V XR products are compatible with XR FLEXVOLT batteries, giving you longer runtime and even greater flexibility meaning the CORDLESS JOBSITE has arrived.



100+
FASTEST GROWING

XR FLEXVOLT

GUARANTEED TOUGH.®

Every one of our products are tested at length by genuine construction professionals, ensuring they never let a user down. Under the most demanding jobsite conditions, DeWALT tools earn the right to be labelled Guaranteed Tough™ – in the hands of real users.

PERFORM & PROTECT



Tools carrying the Perform & Protect shield are designed to exceed the highest demands of the jobsite whilst meeting strict criteria in key health and safety issues:

- CONTROL – unique and innovative torque features help to protect the end user from accidental jams
- VIBRATION – integrated vibration dampening systems allow users to operate tools safer for longer
- DUST – advanced dust control guards against dust inhalation, helping to create a cleaner, safer working environment

XR FLEX VOLT™

POWER OF CORDED | **FREEDOM OF CORDLESS**

54V XR **POWER WHERE** **YOU NEED IT**

Take the power of mains wherever you go with the XR FLEXVOLT range. The 54V batteries offer immense, consistent power to make light work of the toughest applications.

54V XR FLEXVOLT CIRCULAR SAW

DCS575T2 - 2X DCB546



Blade Diameter	190 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°)	67mm
Max. Depth of Cut (45°)	49mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s ²



DCS575NT - BARE UNIT IN TSTAK DCS575N - BARE UNIT

54V XR FLEXVOLT CIRCULAR SAW

DCS576T2 - 2X DCB546



Blade Diameter	190 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut (90°) with Rail	61mm
Max. Depth of Cut (45°) with Rail	43mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s ²
Track Compatible	Yes



DCS576NT - BARE UNIT IN TSTAK DCS576N - BARE UNIT

54V XR FLEXVOLT PLUNGE SAW

DCS520T2 - 2X DCB546



Blade Diameter	165 x 20mm
No Load Speed	2500 - 4200rpm
Max. Depth of Cut (90°)	55mm
Max. Depth of Cut (45°)	44mm
Max. Depth of Cut (90°) with Rail	55mm
Bevel Capacity	47°



DCS520T2R - WITH 1,5M RAILS DCS520NT - BARE UNIT IN TSTAK

54V XR FLEXVOLT RECIPROCATING SAW

DCS388T2 - 2X DCB546



No Load Stroke rate	0 - 3000spm
Stroke Length	28.6mm
Max. Cutting Capacity Timber	300mm
Hand/Arm Vibration	12.5m/s ²



DCS388N - BARE UNIT

54V XR FLEXVOLT 216MM MITRE SAW

DCS777T2 - 2X DCB546



Blade Diameter	216 x 30mm
No Load Speed	6300rpm
Max. Cutting Capacity (90°/45°)	173 x 62mm
Max. Cutting Capacity (45°/45°)	190 x 48mm
Bevel Capacity	50 / 50°
Mitre Capacity	48°



DCS777N - BARE UNIT

54V XR FLEXVOLT 250MM MITRE SAW

DCS778T2 - 2X DCB546



Blade Diameter	250 x 30mm
No Load Speed	4300rpm
Max. Cutting Capacity (90°/90°)	305 x 85mm
Max. Cutting Capacity (90°/45°)	305 x 85mm
Max. Cutting Capacity (45°/45°)	215 x 58mm
Bevel Capacity	48°
Mitre Capacity	50 / 50°



DCS778N - BARE UNIT

54V XR FLEXVOLT TABLE SAW

DCS7485T2 - 2X DCB546



Blade Diameter	210 x 30mm
No Load Speed	5800rpm
Max. Depth of Cut	65mm
Bevel Capacity	-3 to 48°
Rip Capacity	610mm
Rip Capacity (Left)	318mm



DCS7485N - BARE UNIT

54V XR FLEXVOLT SDS PLUS 3-MODE HAMMER DRILL

DCH333X2 - 2X DCB547



No Load Speed	0 - 1000rpm
Max. Drilling Capacity Concrete	30mm
Hand/Arm Vibration	7.5m/s ²
Blows Per Minute	0 - 4480bpm
Impact Energy	3.5J



DCH333NT - BARE UNIT IN TSTAK DCH335X2 - WITH DUST EXTRACTOR D25304DH

DCH323T2 - KITTED UNIT WITH 2.8J IMPACT DCH323NT - BARE UNIT WITH 2.8J IMPACT

54V XR FLEXVOLT SDS PLUS 3-MODE HAMMER DRILL

DCH334X2 - 2X DCB547



No Load Speed	0 - 1000rpm
Max. Drilling Capacity Concrete	30mm
Hand/Arm Vibration	7.5m/s ²
Blows Per Minute	0 - 4480bpm
Impact Energy	3.5J
Includes Quick Change Chuck	



54V XR FLEXVOLT SDS MAX 3-MODE HAMMER DRILL

DCH481X2 - 2X DCB547



No Load Speed	0 - 540rpm
Max. Drilling Capacity Concrete	40mm
Hand/Arm Vibration	9.4m/s ²
Blows Per Minute	0 - 3150bpm
Impact Energy	6.1J



DCH481N - BARE UNIT

54V XR FLEXVOLT ANGLE GRINDER

DCG414T2 - 2X DCB546



No Load Speed	9000rpm
Hand/Arm Vibration	5.9m/s ²
Max. Disc Diameter	125mm
Spindle Thread	M14



DCG414NT - BARE UNIT IN TSTAK DCG414N - BARE UNIT

54V XR FLEXVOLT ALLIGATOR SAW

DCS397T2 - 2X DCB546



Blade Length	430mm
No Load Stroke Rate	2400rpm
Hand/Arm Vibration	4.1m/s ²
Stroke Length	40mm
Blade Stop	0.2sec
Includes TCT Class 12 Blade	



DCS397N - BARE UNIT DCS396T2 - KITTED UNIT WITH 295MM SWORD DCS396N - BARE UNIT WITH 295MM SWORD

54V XR FLEXVOLT SPLIT SHAFT STRING TRIMMER

DCM5713X1 - 1X DCB547



Line Diameter	7.5m x 2.0mm
Cutting Speed	0-5100rpm/0-5600rpm
Cutting Width/Swathe	38cm
Brush Cutter	No
Sound Power Level	94dB(A)



DCM5713N - BARE UNIT

54V FLEXVOLT GRASS TRIMMER & BRUSHCUTTER

DCM571X1 - 1X DCB547



Line Diameter	7.5m x 2.0mm
Cutting Speed	0-5100rpm/0-5600rpm
Cutting Width/Swathe	38cm
Charge Time	70min



DCM571N - BARE UNIT

54V XR FLEXVOLT BLOWER

DCM572X1 - 1X DCB547



Blow Speed	195km/h
Blow Area Volume	400cfm
Variable Speed	Yes
Lock On Switch	Yes



DCM572N - BARE UNIT

54V XR FLEXVOLT 40CM CHAINSAW

DCM575X1 - 1X DCB547



Bar and Chain Length	40cm
Chain Speed	15m/s
Chain Brake	< 1sec
Variable Speed	Yes
Chain Tensioning	Tool Free



DCM575N - BARE UNIT

54V XR FLEXVOLT 305MM MITRE SAW

DHS780T2A - 2X DCB546



Blade Diameter	305 x 30mm
No Load Speed	3800rpm
Max. Cutting Capacity (90°/90°)	345 x 76mm
Max. Cutting Capacity (90°/45°)	305 x 58mm
Max. Cutting Capacity (45°/45°)	215 x 58mm
Mitre Capacity	60 / 50°
Bevel Capacity	49°



DHS780N - BARE UNIT DCB500 - CORD ADAPTER

54V XR FLEXVOLT STUD AND JOIST DRILL

DCD460T2 - 2X DCB546



No Load Speed	0-300 rpm / 0-1,250 rpm
Hand/Arm Vibration - Metal	4.9 m/s ²
Max. Torque	140/130Nm
Power Output	1500W
Max. Capacity	152mm
Chuck Capacity	13mm



DCD460NT - BARE UNIT IN TSTAK DCD460N - BARE UNIT

54V XR FLEXVOLT COMPRESSOR
DCC1054T2 - 2X DCB546


Tank Size	18 / 54V
Voltage / Battery	2.0Ah/ 6.0Ah
Power	0.3kW
Pump Type	Oil-free
Max. Pressure	9.3Bar
Free Air Delivery	31 l/min @ 7Bar
Noise L _{Pa} 1sd / Uncertainty	78.5 dBA
Weight	10kg
18GA Brad Nails per Charge	1220 on 1x 6.0Ah
Regulator Type	OneTurn™


DCC1054N - BARE UNIT
54V XR FLEXVOLT DUAL HANDLE PADDLE MIXER
DCD240X2 - 2X DCB547


No Load Speed	0-725rpm
Hand/Arm Vibration	<2.5m/s ²
Power Output	2000W
Max. Capacity	160mm
Ramp Up/Down Speed	2.5sec
Spindle thread	m14
Battery Cover	Yes


DCD240N - BARE UNIT
6.0AH XR FLEXVOLT 18/54V BATTERY PACK
DCB546


Voltage	18/54V
Battery	6.0Ah XR FLEXVOLT
Length	125mm
Width	85mm
Height	90mm



9.0AH XR FLEXVOLT 18/54V BATTERY PACK

DCB547



Voltage	18/54V
Battery	9.0Ah XR FLEXVOLT
Length	125mm
Width	85mm
Height	90mm



XR FLEXVOLT FAST CHARGER

DCB118



Voltage	240V
Battery Compatibility	18/54V
Charging Current	8.0A
Charging Time (6.0Ah)	60mins




XR FLEXVOLT DUAL CHARGER

DCB132



Voltage	240V
Battery Compatibility	10.8/14.4/18/54V
Charging Current	4.0A



54V XR FLEXVOLT SDS MAX 3-MODE HAMMER DRILL

DCH733X2 - 2X DCB547



No Load Speed	0 - 355rpm
Max. Drilling Capacity Concrete	48mm
Hand/Arm Vibration	9.0m/s2
Blows Per Minute	0 - 2705bpm
Impact Energy	13.3J



DCH733N - BARE UNIT

CONCRETE CUT OFF SAW

DCS690X2 - 2X DCB547



Blade Diameter	230 x 22,2mm
No Load Speed	0 – 6600rpm
Max. Depth of Cut	83mm
Waterfeed Integral	



DCS690N - BARE UNIT

54V XR FLEXVOLT CIRCULAR SAW

DCS577T2 - 2X DCB546



Blade Diameter	190mm Diamond bore
No Load Speed	5800rpm
Max. Depth of Cut	(90°) 67mm
Max. Depth of Cut	(45°) 49mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s2



DCS577N - BARE UNIT



XR

18V **MORE CAPACITY.** **MORE RUNTIME.** **SAME SIZE.**

The XR Li-Ion range offers EXTREME runtime, increased efficiency and improved performance. The intelligent switch module combined with improved brushless technology helps to increase lifetime of both tool and battery. 18V batteries meet all users' needs - from ergonomic design to higher capacity.

18V XR TOOL CONNECT

GET CONNECTED. TAKE CONTROL.

Save time and money with Tool Connect. Using the intelligent inventory management platform you will easily maximise your productivity and protect your investment.

Manage and track all your assets with the Bluetooth enabled tag or by connecting the 18V XR battery connector to your existing 18V XR tools. With the new smart 18V tools, you can also customise the tools specifications for the perfect performance.

Take complete control of your own assets, or those of your team, via the Tool Connect App or web platform, and get ready for the jobsite of the future.



18V XR 5.0AH BATTERY

DCB184B



Voltage	18V
Battery Capacity	5.0Ah
Android Compatible	Yes
iOS Compatible	Yes
Tool Connect Compatible	Yes



18V XR 2.0AH BATTERY

DCB183B



Voltage	18V
Battery Capacity	2.0Ah
Android Compatible	Yes
iOS Compatible	Yes
Tool Connect Compatible	Yes



18V XR COMPACT TOOL CONNECT DRILL DRIVER 5.0AH



DCD792P2B - 2X DCB184B

Max. Torque	70Nm
No Load Speed	0-550/2000rpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm



DCD792D2B - KITTED WITH 2.0AH BATTERIES DCD792NT - BARE UNIT IN TSTAK

18V XR COMPACT TOOL CONNECT HAMMER DRILL DRIVER 5.0AH



DCD797P2B - 2X DCB184B

Max. Torque	70Nm
No Load Speed	0-550/2000rpm
Beats Per Minute	0-9350/34000bpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	13mm



DCD797D2B - KITTED WITH 2.0AH BATTERIES DCD797NT - BARE UNIT IN TSTAK

18V XR XRP TOOL CONNECT DRILL DRIVER 5.0AH



DCD992P2B - 2X DCB184B

Max. Torque	95Nm
No Load Speed	0-450/1300/2000rpm
Max. Drilling Capacity Wood	55mm
Max. Drilling Capacity Metal	15mm



DCD992NT - BARE UNIT

18V XR XRP TOOL CONNECT HAMMER DRILL DRIVER 5.0AH



DCD997P2B - 2X DCB184B

Max. Torque	95Nm
No Load Speed	0-450/1300/2000rpm
Beats Per Minute	0-8600/25500/38250bpm
Max. Drilling Capacity Wood	55mm
Max. Drilling Capacity Metal	15mm
Max. Drilling Capacity Masonry	16mm



DCD997NT - BARE UNIT IN TSTAK

18V XR TOOL CONNECT CONNECTOR



DCE040

Range	30m
Android Compatible	Yes
iOS Compatible	Yes
Tool Connect Compatibility	Yes



TOOL CONNECT TAG 4-PACK



DCE041K4

Range	30m
IP Rate	IP68
Android Compatible	Yes
iOS Compatible	Yes
Tool Connect Compatibility	Yes



DCE041K10 - 10 PACK

18V XR TOOL CONNECT IMPACT DRIVER 5.0AH

DCF888P2B - 2X DCB184B

Max. Torque	205Nm
No Load Speed	0-1000/0-2800/0-3250rpm
Impacts Per Minute	0-3800ipm



XR



DCF888D2B - KITTED WITH 2.0AH BATTERIES DCF888NT - BARE UNIT IN TSTAK DCF888N - BARE UNIT

18V XR COMPACT DRILL DRIVER 5.0AH

DCD791P2 - 2X DCB184

Max. Torque	70Nm
No Load Speed	0-550/2000rpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm



XR



DCD791D2 - KITTED WITH 2.0AH BATTERIES DCD791NT - BARE UNIT IN TSTAK

18V XR COMPACT HAMMER DRILL DRIVER 5.0AH

DCD796P2 - 2X DCB184

Max. Torque	70Nm
No Load Speed	0 - 550/2000rpm
Beats Per Minute	0 - 9350/34000bpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	13mm



XR



DCD796D2 - KITTED WITH 2.0AH BATTERIES DCD796NT - BARE UNIT IN TSTAK

18V XR XRP PREMIUM DRILL DRIVER 5.0AH

DCD991P2 - 2X DCB184



Max. Torque	95Nm
No Load Speed	0 - 450/1300/2000rpm
Max. Drilling Capacity Wood	55mm
Max. Drilling Capacity Metal	15mm



DCD991NT - BARE UNIT IN TSTAK

18V XR XRP PREMIUM HAMMER DRILL DRIVER 5.0AH

DCD996P2 - 2X DCB184



Max. Torque	95Nm
No Load Speed	0-450/1300/2000rpm
Beats Per Minute	0-8600/25500/38250bpm
Max. Drilling Capacity Wood	55mm
Max. Drilling Capacity Metal	15mm
Max. Drilling Capacity Masonry	16mm



DCD996NT - BARE UNIT IN TSTAK

18V XR 3 SPEED IMPACT DRIVER 5.0AH

DCF887P2 - 2X DCB184



Max. Torque	205Nm
No Load Speed	0 - 1000/2800/3250rpm
Impacts Per Minute	0 - 3800ipm
Bit Holder	1/4" (6.35mm)
Max. Bolt Diameter	M12



DCF887D2 - KITTED WITH 2.0AH BATTERIES DCF887NT - BARE UNIT IN TSTAK DCF887N - BARE UNIT

18V XR COMPACT DRILL DRIVER 1.5AH

DCD777S2T - 2X DCB181



Max. Torque	65Nm
No Load Speed	0-500/1750rpm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm



DCD777M2T - KITTED WITH 4.0AH BATTERIES

18V XR COMPACT HAMMER DRILL DRIVER 1.5AH

DCD778S2T - 2X DCB181



Max. Torque	65Nm
No Load Speed	0-500/1750rpm
Beats Per Minute	0-8500/29750bpm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	13mm



18V XR 1/2" COMPACT IMPACT WRENCH 4.0AH

DCF880M2 - 2X DCB182



Max. Torque	203Nm
No Load Speed	0 - 2300rpm
Impacts Per Minute	0 - 2700ipm
Bit Holder	1/2" (12.7mm)
Max. Bolt Diameter	M16



DCF880NT - BARE UNIT IN TSTAK DCF880N - BARE UNIT

18V XR 1/2" COMPACT HI TORQUE WRENCH 5.0AH

DCF894P2 - 2X DCB184



Max. Torque	447Nm
No Load speed	0-900/2000rpm
Impacts per minute	3100
Hand/Arm Vibration	13.5m/s ²
Power Output	580W



DCF894NT - BARE UNIT IN TSTAK DCF894N - BARE UNIT

18V XR 1/2" HI TORQUE WRENCH 5.0AH

DCF899P2 - 2X DCB184



Max. Torque	135/400/950Nm
No Load Speed	0 - 400/1200/1900rpm
Impacts Per Minute	0 - 2400ipm
Bit Holder	1/2" (12.7mm)
Max. Bolt Diameter	M20
Power Output	610W



DCF899NT - BARE UNIT IN TSTAK DCF899N - BARE UNIT

DCF899HP2 - KITTED UNIT WITH 5.0AH BATTERIES AND HOG RING DCF899HN - BARE UNIT WITH HOG RING

18V XR COLLATED SCREWDRIVER 5.0AH

DCF620P2K - 2X DCB184



Max. Torque	5 - 30Nm
No Load Speed	0 - 4400rpm
Bit Holder	1/4" (6.35mm)
Power Output	435W



DCF620D2K - KITTED UNIT WITH 2.0AH BATTERIES

DCF620D2 - KITTED UNIT WITH 2.0AH BATTERIES WITHOUT COLLATED MECHANISM

DCF620NT - BARE UNIT IN TSTAK WITHOUT COLLATED MECHANISM

DCF620N - BARE UNIT WITHOUT COLLATED MECHANISM DCF6201 - COLLATED MECHANISM

18V XR SELF DRILLING SCREWDRIVER 5.0AH

DCF622P2 - 2X DCB184

Max. Torque	34Nm
No Load Speed	0 - 2000rpm
Bit Holder	1/4" (6.35mm)
Max. Screw Length	6.15mm
Power Output	850W



DCF622NT - BARE UNIT IN TSTAK DCF622N - BARE UNIT

18V XR RIGHT ANGLE DRILL DRIVER 1.5AH

DCD740C1 -1X DCB181

Max. Torque	33Nm
No Load Speed	0 - 650/2000rpm
Max. Drilling Capacity Wood	28mm
Max. Drilling Capacity Metal	10mm



DCD740NT - BARE UNIT IN TSTAK DCD740N - BARE UNIT

18V XR SDS-PLUS 3-MODE HAMMER 5.0AH

DCH273P2T - 2X DCB184

No Load Speed	0-1100rpm
Blows Per Minute	0-4600bpm
Max. Drilling Capacity Concrete	24mm
Impact Energy	2.1J
Hand/Arm Vibration	6.6m/s ²



DCH273NT - BARE UNIT IN TSTAK DCH273N - BARE UNIT DCH274P2T - KITTED UNIT WITH 5.0AH BATTERIES AND QCC


DCH274N - BARE UNIT WITH QCC DCH275P2 - DCH274P2 WITH DUST EXTRACTOR D25303DH

18V XR SDS-PLUS 3-MODE HAMMER 4.0AH



DCH253M2 - 2X DCB182

No Load Speed	0 - 1200rpm
Blows Per Minute	0 - 4500bpm
Max. Drilling Capacity Concrete	24mm
Impact Energy	2.1J
Hand/Arm Vibration	6.6m/s ²



DCH253NT - BARE UNIT IN TSTAK DCH253N - BARE UNIT DCH254M2 - KITTED UNIT WITH 4.0AH BATTERIES AND QCC

18V XR SDS-PLUS 3-MODE HAMMER 4.0AH



DCH133M1 - 1X DCB182

No Load Speed	0-1550rpm
Blows Per Minute	0-5680bpm
Max. Drilling Capacity Concrete	26mm
Impact Energy	2.6J
Hand/Arm Vibration	14.5m/s ²



DCH133NT - BARE UNIT IN TSTAK DCH133N - BARE UNIT

18V XR SDS-PLUS 3-MODE HAMMER 5.0AH



DCH283P2 - 2X DCB184

No Load Speed	0-980rpm
Blows Per Minute	0-4480bpm
Max. Drilling Capacity Concrete	26mm
Impact Energy	2.8J
Hand/Arm Vibration	8.5m/s ²



DCH283NT - BARE UNIT IN TSTAK

18V XR 125MM ANGLE GRINDER 5.0AH**DCG405P2 - 2X DCB184****XR**

No Load Speed	9000rpm
Max. Disc Diameter	125mm
Spindle Thread	M14
Hand/Arm Vibration	4.4m/s ²

**18V XR**
BRUSHLESS

TSTAK™

PERFORM
PROTECT**DCG405FN - BARE UNIT WITH FLAT HEAD DESIGN DCG405NT - BARE UNIT IN TSTAK****DCG405N - BARE UNIT DCG406NT - BARE UNIT IN TSTAK WITH PADDLE SWITCH****18V XR 125MM ANGLE GRINDER 4.0AH****DCG412M2 - 2X DCB182****XR**

No Load Speed	7000rpm
Max. Disc Diameter	125mm
Spindle Thread	M14
Hand/Arm Vibration	6.0m/s ²

**18V XR**
BRUSHLESS

TSTAK™

DCG412NT - BARE UNIT IN TSTAK DCG412N - BARE UNIT**18V XR CONCRETE NAILER 5.0AH****DCN890P2 - 2X DCB184****XR**

Nail Diameter	2.6 - 3.7mm
Magazine Angle	15°
Nail Length	13 - 57mm
Firing Mode	Rapid Cycle™ and Sequential

**18V XR**
BRUSHLESS

TSTAK™

DCN890N - BARE UNIT

18V XR CONCRETE NAILER ATTACHMENTS



DCN8901-XJ	Driver Blade Replacement Kit for DCN890
DCN8902-XJ	Magnetic Contact Trip for DCN890
DCN8903-XJ	Non-Magnetic Contact Trip for DCN890
DCN8904-XJ	Drywall Contact Trip for DCN890
DCN8905-XJ	Extension Pole for DCN890



DCN8901-XJ



DCN8902-XJ



DCN8903-XJ



DCN8904-XJ



DCN8905-XJ

18V XR FRAMING NAILER 5.0AH



DCN692P2 - 2X DCB184

Nail Diameter	2.8 - 3.3mm
Magazine Angle	30 - 34°
Nail Length	50 - 90mm
Firing Mode	Bump & Sequential
Temperature Range	-20 - 50°C



DCN692N - BARE UNIT DCN6901 - RETURNS SPRING KIT

18V XR METAL CONNECTOR NAILER 5.0AH



DCN693P2 - 2X DCB184

Nail Diameter	4.0mm
Magazine Angle	33°
Nail Length	40-60mm
Firing Mode	Sequential & Rapid Sequential



DCN693N - BARE UNIT

18V XR SECOND FIX NAILER 5.0AH**DCN660P2 - 2X DCB184**

Nail Diameter	1.6mm (16Ga)
Magazine Angle	20°
Nail Length	32 - 63mm
Firing Mode	Bump & Sequential
Temperature Range	-20 - 50°C

**XR****DCN660D2 - KITTED UNIT WITH 2.0AH BATTERIES DCN660NT - BARE UNIT IN TSTAK DCN660N - BARE UNIT****18V XR BRAD NAILER 2.0AH****DCN680D2 - 2X DCB183**

Nail Diameter	1.25mm (18Ga)
Magazine Angle	0° (Straight)
Nail Length	15 - 54mm
Firing Mode	Bump & Sequential
Temperature Range	-20 - 50°C

**XR****DCN680NT - BARE UNIT IN TSTAK DCN680N - BARE UNIT****18V XR NARROW CROWN STAPLER 2.0AH****DCN681D2 - 2X DCB183**

Nail Diameter	1.25mm (18Ga)
Staple Crown	5.6mm (5x staples)
Magazine Angle	0° (Straight)
Nail Length	12 - 38mm
Firing Mode	Bump & Sequential

**XR****DCN681N - BARE UNIT**

18V XR FLOORING STAPLER 2.0AH

DCN682D2 - 2X DCB183



Nail Diameter	1.25mm (18Ga)
Staple Crown	5.6mm (5x staples)
Magazine Angle	0° (Straight)
Nail Length	12 - 38mm
Firing Mode	Rapid Cycle & Sequential
Temperature Range	-20 - 50°C



DCN682N - BARE UNIT

18V XR 15GA SECOND FIX NAILER 5.0AH

DCN650P2 - 2X DCB184



Nail Diameter	1.8mm
Magazine Angle	34°
Nail Length	32-63mm
Firing Mode	Bump & Sequential



DCN650N - BARE UNIT

18V XR 184MM MITRE SAW 4.0AH

DCS365M2 - 2X DCB182



Blade Diameter	184 x 16mm
No Load Speed	3750rpm
Max. Cutting Capacity	250 x 50mm
Bevel Capacity	48°
Mitre Capacity	48 / 48°



DCS365N - BARE UNIT

18V XR 184MM CIRCULAR SAW 5.0AH

DCS570P2 - 2X DCB184

Blade Diameter	184 x 16mm
No Load Speed	5500rpm
Max. Depth of Cut (90°)	64mm
Max. Depth of Cut (45°)	48mm
Bevel Capacity	57°
Hand/Arm Vibration	2.5m/s ²



DCS570NT - BARE UNIT IN TSTAK DCS570N - BARE UNIT

18V XR 165MM CIRCULAR SAW 4.0AH

DCS391M2 - 2X DCB182

Blade Diameter	165 x 20mm
No Load Speed	5150rpm
Max. Depth of Cut	55mm
Max. Depth of Cut (45°)	42.1mm
Bevel Capacity	50°
Hand/Arm Vibration	<2.5 m/s ²



DCS391NT - BARE UNIT IN TSTAK DCS391N - BARE UNIT

18V XR 140MM METAL CUTTING CIRCULAR SAW

DCS373NT

Blade Diameter	140 x 20mm
No Load Speed	3700rpm
Max. Depth of Cut (90°)	43mm
Hand/Arm Vibration	3.8m/s ²



DCS373N - BARE UNIT

18V XR JIGSAW 4.0AH

DCS331M2 - 2X DCB182



No Load stroke Rate	0 - 3000spm
Max. Depth of Cut Wood	135mm
Max. Depth of Cut Metal	10mm
Bevel Capacity	45°
Stroke Length	26mm



DCS331NT - BARE UNIT IN TSTAK DCS331N - BARE UNIT

18V XR RECIPROCATING SAW 4.0AH

DCS380M2 - 2X DCB182



No Load Stroke Rate	0 - 2950spm
Stroke Length	28.6mm



DCS380N - BARE UNIT

18V XR COMPACT RECIPROCATING SAW 5.0AH

DCS367P2 - 2X DCB184



No Load Stroke Rate	0-2900spm
Max. Cutting Capacity (Steel Section & Pipes)	100mm
Stroke Length	28.6mm



DCS367NT - BARE UNIT IN TSTAK DCS367N - BARE UNIT

18V XR COMPACT BANDSAW

DCS371NT

XR

No Load Speed	174 Metres/min
Max. Cutting Height	63mm
Max. Watts Out	460W



DCS371N - BARE UNIT

18V XR PLANER 5.0AH

DCP580P2 - 2X DCB184

XR

No Load Speed	15000rpm
Max. Depth of Cut	2.0mm
Max. Rebating Depth	9.0mm
Planer Width	82mm



DCP580NT - BARE UNIT IN TSTAK DCP580N - BARE UNIT DWV9390 - PLANER DUST BAG

18V XR DIE GRINDER 5.0AH

DCG426P2 - 2X DCB184

XR

No Load Speed	0 - 5,000/ 17,500/ 25,000rpm
Max. Disc Diameter	38mm
Power Output	760watts
Spindle Thread	M15
Hand/Arm Vibration - Grinding	4.4 m/s ²



DCG426N - BARE UNIT

18V XR OSCILLATING TOOL 4.0AH

DCS355M2 - 2X DCB182



Oscillations per Minute	0 - 20000opm
Tool Free Accessory Fitment	Yes
Accessories Included	35



DCS355D2 - KITTED UNIT WITH 2.0AH BATTERIES DCS355NT - BARE UNIT IN TSTAK DCS355N - BARE UNIT

18V XR DRYWALL CUT OUT TOOL

DCS551N



No Load Speed	26000rpm
Included Collets	3.2mm (1/8")
Max. Watts Out	550W



18V XR THREADED ROD CUTTER

DCS350NT



No Load Speed	30spm
Cut Capacity (mild steel)	M6, M8, M10, M12 mm
Cut Capacity (Stainless Steel)	M6, M8, M10 mm
Weight	4.1kg



DCS350N - BARE UNIT

18V XR METAL SHEAR

DCS491NT



No Load Speed	0-2450
Cut Capacity (mild steel)	1.3mm
Cut Capacity (Stainless Steel)	1.0mm



DCS491N - BARE UNIT

18V XR CAULK GUN CARTRIDGE HOLDER & TUBE 2.0AH

DCE581D1 - 1X DCB183



Carrier Size	300-600ml
Push Force	2500N (254kg)
Push Speed	51-533 mm/min



DCE5801 - CLEAR TUBE ATTACHMENT DCE571D1 - KITTED UNIT WITH 2.0AH BATTERY AND TUBE HOLDER

DCE560D1 - KITTED UNIT WITH 2.0AH BATTERY AND CARTRIDGE HOLDER DCE581N - BARE UNIT

DCE560N - BARE UNIT WITH CARTRIDGE HOLDER DCE5601 - CARTRIDGE HOLDER DC5404 - NOZZLES 25-PACK

18V XR GREASE GUN 4.0AH

DCGG571M1 - 1X DCB182



Output Pressure	690bar, 10000PSI
Feed Rate	147g/min
Grease Type Up to	NLGI #2
Grease Capacity Bulk	453g
Cartridge	400g



18V XR CONCRETE VIBRATOR

DCE531N



Vibrations/minute	15,000vpm
Shaft Length	1.2m
Head Diameter	28.6mm



This product comes without a battery



18V XR DRAIN CLEANER 2.0AH

DCD200D1 - 1X DCB183



No Load Speed	0-620rpm
Cable length	7.6m
Rotating LED light	



DCD200N - BARE UNIT

18V XR STRING TRIMMER 5.0AH

DCM561P1 - 1X DCB184



Cutting Width	33cm
Line Diameter	2.0mm
Cutting Speed	0-6000rpm



DCM561PB - BARE UNIT DCM561P1S - KITTED UNIT WITH 5.0AH BATTERY AND SPLIT SHAFT

DCM561PBS - BARE UNIT WITH SPLIT SHAFT

18V XR BLOWER 5.0AH**DCM562P1 - 1X DCB184****XR**

Noise Level	<65dB
Blow Speed	144km/h
Variable Speed	Yes
Lock On Switch	Yes

**DCM562PB - BARE UNIT****18V XR HEDGE TRIMMER 5.0AH****DCM563P1 - 1X DCB184****XR**

Blade Length	55cm
Cutting Gap	19mm

**DCM563PB - BARE UNIT****18V XR CHAINSAW 5.0AH****DCM565P1 - 1X DCB184****XR**

Bar Length	30cm
Chain Speed	7.68m/s
Chain Brake	< 1sec
Variable Speed	Yes
Chain Tensioning	Tool Free

**DCM565N - BARE UNIT**

18V XR MOWER 5.0AH

DCMW564P2 - 2X DCB184



Cutting Width	48cm
No Load Runtime	22min
Area of Cut	800m ²
Grassbox Capacity	55L



DCMW564N - BARE UNIT

18V XR COMPACT BLOWER

DCV100



Blow Speed	80m/s
Variable Speed	Yes
Lock On Switch	Yes



XR L-CLASS EXTRACTOR

DCV584L



Battery Compatibility	18V/54V
Max. Airflow	954L/min
Capacity	7.5L
Wet & Dry Filter	Yes



18V XR COMPACT WET & DRY VACUUM

DCV517N

XR

Battery Compatibility	18V
Max. Airflow	954L/m
Capacity	1.9L
Wet & Dry Filter	Yes



18V XR

18V XR COMPACT RADIO

DCR020

XR

Battery Compatibility	10.8/14.4/18V
Power Source	AC/DC
Modes	DAB/FM/AUX/USB
USB Charger	5V/2.1A



18V XR

DCR019 - FM/AM

18V XR RADIO CHARGER

DCR017

XR

Battery Compatibility	10.8/14.4/18V
Power Source	AC/DC
Modes	DAB/FM/AUX/USB
USB Charger	5V/2.1A



18V XR **10.8V XR**

XR RADIO CHARGER



DCR027

Battery Compatibility	18/54V
Power Source	AC/DC
Modes	DAB+/FM/AUX/USB
Output	20W RMS/Channel
USB Charger	5V/2.1A



BLUETOOTH ADAPTOR



DCR002

AUX Port	3.5mm
----------	-------



TOUGHSYSTEM® JOB SITE RADIO AND CHARGER



DWST1-75659

Width	370mm
Length	540mm
Height	158mm
IP	54



TSTAK® CONNECTED RADIO WITH CHARGER



DWST1-81078

Width	470mm
Depth	170mm
Height	350mm



18V XR COMPACT LED PIVOT LIGHT



DCL040

Output	110 Lumen
--------	-----------



18V XR LED SPOT LIGHT



DCL043

Output	120 - 1000 Lumen
--------	------------------



18V XR LED PIVOT LIGHT**DCL050**

Output

250 - 500 Lumen

**18V XR LED AREA LIGHT****DCL060**

Output

1500 Lumen

**18V XR LED TRIPOD LIGHT****DCL079**

Light output

1000lm, 1800lm, 3000lm

IP Rating

IP55



18V XR 5.0AH BATTERY

DCB184



Voltage	18V
Battery Capacity	5.0Ah
Tool Connect Compatible	No



18V XR 4.0AH BATTERY

DCB182



Voltage	18V
Battery Capacity	4.0Ah
Tool Connect Compatible	No



18V XR 1.5AH BATTERY

DCB181



Voltage	18V
Battery Capacity	1.5Ah
Tool Connect Compatible	No



18V XR 2.0AH BATTERY

DCB183



Voltage	18V
Battery Capacity	2.0Ah
Tool Connect Compatible	No



18V XR 12V CAR CHARGER

DCB119



Voltage	10.8V, 14.4V, 18V
Battery	XR Li-Ion
Charging Current	2.5A



18V XR 240V CHARGER

DCB115



Voltage	10.8V, 14.4V, 18V
Battery	XR Li-Ion
Charging Current	4.0A
Charging Time	30 (2.0Ah) min



18V XR USB CHARGER

DCB090



Voltage	10.8V, 14.4V, 18V
Battery	Li-Ion
Charging Current	1.5A





XR

10.8V XR

With Extreme runtime, the 10.8V XR range offers great performance combined with a lighter design.

10.8V XR COMPACT DRILL DRIVER 2AH

DCD710D2 - 2X DCB127



No Load Speed	0 - 400/1500rpm
Max. Torque	24Nm
Max. Drilling Capacity Wood	20mm
Max. Drilling Capacity Metal	10mm



DCD710C2 - KITTED UNIT WITH 1,5AH BATTERIES

10.8V XR COMPACT HAMMER DRILL DRIVER 2AH

DCD716D2 - 2X DCB127



No Load Speed	0-400/1500rpm
Max. Torque	30Nm
Beats per minute	0-6000/22500
Max. Drilling Capacity Wood	20mm
Max. Drilling Capacity Metal	10mm
Max. Drilling Capacity Masonry	8mm



DCD716C2 - KITTED UNIT WITH 1,5AH BATTERIES

10.8V XR IMPACT DRIVER 2AH

DCF815D2 - 2X DCB127



No Load Speed	0 - 2450rpm
Max. Torque	107Nm
Impacts Per Minute	0 - 3400ipm
Bit Holder	1/4" (6.35mm)
Max. Bolt Diameter	M10



10.8V XR IMPACT WRENCH 2AH**DCF813D2 - 2X DCB127**

No Load Speed	0 - 2450rpm
Max. Torque	130Nm
Impacts Per Minute	0 - 3400ipm
Bit Holder	3/8" (9.525mm) Hog Ring
Max. Bolt Diameter	M12

**XR****10.8V XR SCREWDRIVER 2AH****DCF610D2 - 2X DCB127**

No Load Speed	0 - 1050rpm
Max. Torque	8Nm
Bit Holder	1/4" (6.35mm)

**XR****10.8V XR COMPACT RECIPROCATING SAW 2AH****DCS310D2 - 2X DCB127**

No Load Stroke Rate	0 - 2700spm
Stroke Length	14mm
Hand/Arm Vibration - cutting Boards	8.5m/s ²

**XR****DCS310N - BARE UNIT**

10.8V XR INSPECTION CAMERA 2AH

DCT410D1 - 1X DCB127



Cable Size	900 x 17mm
Waterproof Cable	Yes
Wireless Screen	Yes
Zoom	3x
Resolution	320x480 dpi
Data Storage	Micro SD card



DCT410N - BARE UNIT

10.8V XR INFRARED THERMOMETER

DCT414N



Temperature Range	-29°C to 500°C
Screen Size	36mm
Adjustable Emissivity	0.1 to 1.0
Field of view	30cm x 2.5cm
LED Indicator	Yes



10.8V XR COMPACT LED TORCH

DCL510N



Output	130 Lumens
Size	123mm x 52mm



10.8V XR 2AH BATTERY

DCB127



Voltage	10.8V
Battery Capacity	2.0Ah



A construction worker wearing a yellow hard hat and a high-visibility vest is working on a building frame. In the foreground, a DeWalt laser level is mounted on a tripod. The laser level is black and orange, with a battery pack on top. The battery pack has "10.8V / XR LITHIUM ION 2.0" and "DEWALT" printed on it. The background shows a cloudy sky and the steel structure of a building under construction.

XR

LASERS

Fast Precision Levelling

DEWALT Laser levels measure up to the toughest standards whilst providing the precision accuracy needed to get the job done quickly and accurately.

The new 10.8V / 18V compatible range shares the same battery as our 10.8V / 18V power tools and is available in both red and green beam versions.

18V XR ROTARY LASER

DCE074D1R

Beam Colour	Red
Accuracy	+/-3mm @ 30m
Self-levelling Range	+/-5°
Max. Working Range With Detector	45-457m
Sloping Range	+/-10°
IP Rating	54
Tripod Connection	5/8"
Rotation Speed	150, 300, 600, 1200rpm
Laser Class	2
Modes	Vertical, Horizontal, Cross Line, Spot Only Up



18V XR ROTARY LASER NORDIC KIT

DCK374D1RND

Beam Colour	Red
Accuracy	+/-3mm @ 30m
Self-levelling Range	+/-5°
Max. Working Range with Detector	45-457m
Sloping Range	+/-10°
IP Rating	54
Tripod Connection	5/8"
Rotation Speed	150, 300, 600, 1200rpm
Laser Class	2
Modes	Vertical, Horizontal, Cross Line, Spot Only Up



18V XR ROTARY LASER

DCE079D1G

Beam Colour	Green
Accuracy	+/-1.5mm @ 30m
Self-levelling Range	+/-5°
Max. Working Range With Detector	76-600m
Sloping Range	+/-10°
IP Rating	67
Tripod Connection	5/8"
Rotation Speed	150, 300, 600, 1200rpm
Laser Class	2
Modes	Vertical, Horizontal, Cross Line, Spot Only Up, Down



18V XR ROTARY LASER NORDIC KIT

DCK379D1GND

Beam Colour	Green
Accuracy	+/-1.5mm @ 30m
Self-levelling Range	+/-5°
Max. Working Range with Detector	76-600m
Sloping Range	+/-10°
IP Rating	67
Tripod Connection	5/8"
Rotation Speed	150, 300, 600, 1200rpm
Laser Class	2
Modes	Vertical, Horizontal, Cross Line, Spot Only Up, Down



10.8V XR CROSS LINE LASER

DCE088D1G

Beam Colour	Green
Accuracy	+/-3mm @ 10m
Self-levelling Range	+/-4°
Max. Working Range With Detector	30-60m
IP Rating	65
Number Of Beams	2 - Horizontal, Vertical
Tripod Connection	5/8", 1/4"
Pendulum Lock	Yes
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line



DCE088NR - BARE UNIT RED BEAM MAX. WORKING RANGE 20-50 WITH DETECTOR

10.8V XR 3 X 360° CROSS LINE LASER

DCE089D1G

Beam Colour	Green
Accuracy	+/-3mm @ 10m
Self-levelling Range	+/-4°
Max. Working Range With Detector	30-60m
IP Rating	65
Number Of Beams	3 - Horizontal, Vertical, Side
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2
Modes	1 x 360° Horizontal, 1 x 360° Vertical, 2nd 360° Vertical



DCE089NR - BARE UNIT RED BEAM MAX. WORKING RANGE 20-50M WITH DETECTOR

10.8V XR 5 SPOT CROSS LINE LASER

DCE0825D1G

Beam Colour	Green
Accuracy	+/-3mm @ 10m Spot +/-2 @ 10m
Self-levelling Range	+/-4°
Number Of Beams	7 - Cross Line plus 5 spots
Max. Working Range Line/Spot	30m/45m
IP Rating	65
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line, 3 Spot Only: Up, Down, Front, 5 Spot Only: Up, Down, Front, Both Sides



CROSS LINE LASER

DW088CG

Beam Colour	Green
Accuracy	+/-3mm @ 10m
Self-levelling Range	+/-4°
IP Rating	54
Number Of Beams	2 - Horizontal, Vertical
Max. Working Range	20-50m
Tripod Connection	1/4"
Laser Class	2
Modes	Vertical Only, Horizontal Only, Cross Line
Power Source	3 x AAA



DW088K - RED BEAM MAX. WORKING RANGE 15-50M WITH DETECTOR DW088KD - INCLUDES DETECTOR

RED LINE LASER DETECTOR

DE0892

Compatibility	DW088, DW089, DCE088NR, DCE089NR
Max. Working Range	50m
Power Source	1 x 9V



GREEN LINE LASER DETECTOR

DE0892G

Compatibility	DW088CG, DCE088D1G, DCE089D1G, DCE0825D1G
Max. Working Range	50m
Power Source	1 x 9V



WATERPROOF DIGITAL ROTARY LASER DETECTOR

DE0772

Compatibility	DCE074D1R
Working Range	Rotary > 300m (Radius)
Power Source	1 x 9V
Adjustable Volume Control	Up to 100dBA



10.8V 5 SPOT GREEN

DCE085

Beam Colour	Green
Accuracy	+/- 2mm @ 10M
Number of Beams	5
Max. Working Range Line/Spot	45m
IP Rating	65
Tripod Connection	1/4" x 5/8"
Pendulum Lock	Yes
Laser Class	2



30M LASER DISTANCE MEASURE

DW033

Levelling Accuracy	+/-3mm @ 10m
Max. Working Range	0.15-30m
Power Source	2 x AAA
Laser Class	2



30M BLUETOOTH LASER DISTANCE MEASURE

DW099S

Accuracy	+/-2mm @ 10m
Indoor Visibility Range	30m
IP Rating	54
Power Source	2 x AAA
Calculations	Distance, Area, Volume
App Available	iOS/Android
Tool Connect Compatible	Yes



50M BLUETOOTH LASER DISTANCE MEASURE

DW03050

Accuracy	+/-1.5mm @ 10m
Indoor Visibility Range	50m
IP Rating	65
Power Source	2 x AAA
Calculations	Distance, Area, Volume, Pythagoras
Tool Connect Compatible	Yes
App Available	iOS/Android



100M BLUETOOTH LASER DISTANCE MEASURE

DW03101

Levelling Accuracy	+/-1.5mm @ 10m
Indoor Visibility Range	100m
Power Source	2 x AAA
IP Rating	65
Calculations	Distance, Area, Volume, Pythagoras, Timer Function, Inclinometer, Partial Height
Tool Connect Compatible	Yes
App Available	iOS/Android



LASER ACCESSORIES

DE0730

Red Target Card



LASER ACCESSORIES

DE0730G

Green Target Card



LASER ACCESSORIES

DE0881

Mini Tripod

Adjustable Height	0.6 - 1.7m
Mounting Thread	1/4
Material	Aluminium



LASER ACCESSORIES

DE0735

Elevated Laser Tripod

Telescopic Head	Yes
Adjustable Height	1.15 - 3m
Material	Aluminium



LASER ACCESSORIES

DE0736

Laser Tripod

Adjustable Height	1.07 - 1.73m
Mounting Threads	11 x 5/8"
Material	Aluminium



LASER ACCESSORIES

DE0714G

Glasses
For use with green lasers



LASER ACCESSORIES

DE0737

Grade Rod

Adjustable Height	2.4m
Spirit Level Bubble Vial	Yes
Sliding Detector Mount	Yes



LASER ACCESSORIES

DE0882

Laser Pole

Adjustable Height	3.4m
Mounting Thread	1/4"



OTHER LEVELS

DW096PK

Auto Level kit

Magnification	26x
Max. Working Range	100m
Accuracy	2mm
Horizontal Circle Type	Continuous Drive
Stadia Ratio	1:100



Kit contains: Auto Level, Tripod, Grade Rod, String Plumb Bob, Carry Case



HAMMERS

A full range of hammer drills to get the job done. The essential tool for drilling anchors and fixing holes, through holes into concrete, brick, masonry and wood in various sizes. Tools that won't let you down.

SDS-PLUS HAMMER 3-MODE

D25033K

Power Input	710W
Max. Drilling Capacity Concrete	22mm
Max. Drilling Capacity Core Bit	50mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	2.0J
No Load Speed	0 - 1550rpm
Blows Per Minute	0 - 5680bpm
Hand and Arm Vibration – drilling into Concrete	13.6m/s ²
Hand/Arm Vibration – Chiselling	12.5m/s ²
Sound Pressure	89dB(A)
Sound Power	100.1dB(A)



D25032K - NO CHISELLING FUNCTION

SDS-PLUS HAMMER 3-MODE

D25134K

Power Input	800W
Max. Drilling Capacity Concrete	26mm
Max. Drilling Capacity Core Bit	65mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	2.8J
No Load Speed	0 - 1500rpm
Blows Per Minute	0 - 5540bpm
Hand and Arm Vibration – drilling into Concrete	15.7m/s ²
Hand/Arm Vibration – Chiselling	14.3m/s ²
Sound Pressure	89dB(A)
Sound Power	100.1dB(A)



D25133K - NO QUICK CHANGE CHUCK

SDS-PLUS HAMMER 3-MODE

D25144K

Power Input	900W
Max. Drilling Capacity Concrete	26mm
Max. Drilling Capacity Core Bit	65mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	3.0J
No Load Speed	0-1450rpm
Blows Per Minute	0-5350bpm
Hand/Arm Vibration - drilling into Concrete	14.9m/s ²
Hand/Arm Vibration - Chiselling	13.8m/s ²
Sound Pressure	89dB(A)
Sound Power	100.1dB(A)



L-SHAPE SDS-PLUS HAMMER 3-MODE

D25334K

Power Input	950W
Max. Drilling Capacity Core Bit	65mm
Max. Drilling Capacity Wood	30mm
Max. Drilling Capacity Metal	13mm
Impact Energy	3.5J
No Load Speed	0-1150rpm
Blows Per Minute	0-5200bpm
Hand/Arm Vibration – drilling into Metal	<2.5m/s ²
Hand/Arm Vibration – screw driving without impact	<2.5m/s ²
Sound Pressure Uncertainty	93dB(A)
Sound Power Uncertainty	104dB(A)



D25333K - NO QUICK CHANGE CHUCK D25335K-D25333K WITH DUST EXTRACTOR D25304DH

L-SHAPE SDS-PLUS HAMMER 3-MODE

D25414KT

Power Input	1000W
Max. Drilling Capacity Concrete	32mm
Max. Drilling Capacity Core Bit	100mm
Max. Drilling Capacity Wood	32mm
Max. Drilling Capacity Metal	13mm
Impact Energy	4.2J
No Load Speed	0 - 820rpm
Blows Per Minute	0 - 4700bpm
Hand and Arm Vibration – drilling into Concrete	8.2m/s ²
Hand/Arm Vibration – Chiselling	7.1m/s ²
Sound Pressure	86dB(A)
Sound Power	97dB(A)



D25413K - NO QUICK CHANGE CHUCK

SDS-PLUS DEDICATED CHIPPING HAMMER

D25430K

Power Input	1000W
Blows Per Minute	0-4700bpm
Impact Energy	4.2J



SDS-MAX COMBINATION HAMMER

D25481K

Power Input	1050 Watts
Max. Drilling Capacity Concrete	40mm
Max. Drilling Capacity Core Bit	100mm
Max. Drilling Capacity Wood	32mm
Impact Energy	6.1J
No Load Speed	540rpm
Blows Per Minute	3150bpm
Hand and Arm Vibration – drilling into Concrete	9.4m/s ²
Hand/Arm Vibration – Chiselling	7.1m/s ²
Sound Pressure	96dB(A)
Sound Power	107dB(A)



SDS-MAX COMBINATION HAMMER

D25501K

Power Input	1100W
Max. Drilling Capacity Core Bit	90mm
Max. Drilling Capacity Concrete	40mm
Impact Energy	8.0J
No Load Speed	400rpm
Blows Per Minute	2740bpm
Hand/Arm Vibration – drilling into Concrete	18.3m/s ²
Hand/Arm Vibration – Chiselling	13.2m/s ²
Sound Pressure	94dB(A)
Sound Power	104dB(A)



SDS-MAX COMBINATION HAMMER

D25601K

Power Input	1250W
Max. Drilling Capacity Concrete	45mm
Max. Drilling Capacity Core Bit	100mm
Impact Energy	8.0J
No Load Speed	0 - 210/415rpm
Blows Per Minute	0 - 1430/2840bpm
Hand/Arm Vibration – drilling into Concrete	8.8m/s ²
Hand/Arm Vibration – Chiselling	7.2m/s ²
Sound Pressure	92dB(A)
Sound Power	103dB(A)



SDS-MAX COMBINATION HAMMER

D25604K

Power Input	1250W
Max. Drilling Capacity Core Bit	100mm
Max. Drilling Capacity Concrete	45mm
Impact Energy	8.0J
No Load Speed	210-415rpm
Blows Per Minute	1430-2840rpm
Hand/Arm Vibration – drilling into Concrete	8.7m/s ²
Hand/Arm Vibration – Chiselling	6.8m/s ²
Sound Pressure	93dB(A)
Sound Power	104dB(A)



SDS-MAX COMBINATION HAMMER

D25733K

Power Input	1600W
Max. Drilling Capacity Concrete	48mm
Impact Energy	13.3J
No Load Speed	177-355rpm
Blows Per Minute	1350-2705bpm
Hand/Arm Vibration	9.6m/s ²



SDS-MAX COMBINATION HAMMER

D25773K

Power Input	1700W
Max. Drilling Capacity Concrete	52mm
Impact Energy	19.4J
No Load Speed	145-290rpm
Blows Per Minute	1105-2210bpm
Hand/Arm Vibration	12.4m/s ²



SDS-MAX DEDICATED CHIPPING HAMMER

D25810K

Power Input	1050W
Impact Energy	7.1J
Blows Per Minute	3150bpm
Hand/Arm Vibration – Chiselling	8.5m/s ²
Sound Pressure	94dB(A)
Sound Power	105dB(A)



6 KILO SDS-MAX DEDICATED CHIPPING HAMMER

D25831K

Power Input	1250W
Impact Energy	8.0J
Blows Per Minute	1430-2840bpm
Hand/Arm Vibration – Chiselling	8.3m/s ²
Sound Pressure	91dB(A)
Sound Power	102dB(A)



SDS-MAX DEDICATED CHIPPING HAMMER

D25872K

Power Input	1600W
Impact Energy	13.3J
Blows Per Minute	1350-2705bpm
Hand/Arm Vibration	9.7m/s ²



SDS-MAX DEMOLITION HAMMER

D25951K

Power Input	1600W
Impact Energy	24J
Blows Per Minute	1620bpm
Hand/Arm Vibration – Chiselling	8.8m/s ²
Sound Pressure	91dB(A)
Sound Power	102dB(A)



SDS-MAX DEMOLITION HAMMER

D25902K

Power Input	1550W
Impact Energy	19.0J
Blows Per Minute	1050/2100bpm
Hand/Arm Vibration – chiselling into Concrete	7.5m/s ²
Sound Pressure	89dB(A)
Sound Power	100dB(A)



28MM HEX DEMOLITION BREAKER

D25960K

Power Input	1600W
Impact Energy	35J
Blows Per Minute	1450bpm
Hand/Arm Vibration	6.8m/s ²
Sound Pressure	91dB(A)
Sound Power	102dB(A)



30KG PAVEMENT BREAKER

D25981K

Power Input	2100W
Impact Energy	62J
Blows Per Minute	960bpm
Hand/Arm Vibration	4.8m/s ²
Tool Holder	28mm HEX
Sound Pressure	94dB(A)
Sound Power	105dB(A)
Category	30kg



D25981 - 30 KILO PAVEMENT BREAKER D259811 - TROLLEY FOR D25981 30 KILO PAVEMENT BREAKER

SDS PLUS EXTRACTION TELESCOPE

D25301D

Compatible With
All DeWALT SDS-Plus hammers with a 43mm or 54mm collar diameter

Max. Drill Bit Diameter	16mm
Max. Drill Bit Length	224mm
Max. Drill Bit Depth	150mm
Hose Diameter	35mm



INTEGRATED SDS PLUS DUST EXTRACTOR

D25304DH

Compatible With
DCH333, DCH334, D25333, D25334, DCH283

Max. Drill Bit Diameter	26mm
Max. Drill Bit Length	250mm
Max. Drill Bit Depth	180mm
Washable HEPA filter	99.5% efficiency for dust particles (-0.3 microns)



INTEGRATED HAMMER DRILL DUST EXTRACTOR

D25303DH

Compatible with DCH273, DCH274

Collar Bit Diameter	54mm
Max. Drill Bit Diameter	16mm
Max. Drill Bit Length	120mm
Max. Drill Bit Depth	105mm
Washable HEPA filter	99.5% efficiency for dust particles (-0.3 microns)





MITRE SAWS & MACHINERY

An extensive range offering revolutionary features like best-in-class accuracy, high cut capacity, integral lighting, dual bevel, and now dual power. With the introduction of ground breaking FLEXVOLT® technology, DeWALT now offers products that were unimaginable to be cordless.

216MM MITRE SAW

DWS773

Power Input	1300W
Blade Diameter	216 x 30mm
Power Input	1400W
No Load Speed	4500rpm
Max. Cutting Capacity Width x Height	250 x 62mm
Mitre Capacity	48 / 48°
Bevel Capacity	48°



216MM MITRE SAW

DWS774

Blade Diameter	216 x 30mm
Power Input	1400W
No Load Speed	4500rpm
Max. Cutting Capacity Width x Height	250 x 62mm
Mitre Capacity	48 / 48°
Bevel Capacity	48°



216MM MITRE SAW

DWS777

Blade Diameter	216 x 30mm
Power Input	1800W
No Load Speed	6300rpm
Max. Cutting Capacity Width x Height	270 x 62mm
Mitre Capacity	50 / 50°
Bevel Capacity	48°



216MM MITRE SAW

DW712N

Power Input	1600W
Blade Speed	5400rpm
Blade Diameter	216x30mm
Cutting Capacity at 90°/45° (W x H)	300x50mm
Bevel Capacity	48/-2°



250MM MITRE SAW

DWS778

Blade Diameter	250 x 30mm
Power Input	1850W
No Load Speed	4300rpm
Max. Cutting Capacity Width x Height	305 x 85mm
Mitre Capacity	50 / 50°
Bevel Capacity	48°



250MM MITRE SAW

DW717XPS

Blade Diameter	250 x 30mm
Power Input	1675W
No Load Speed	4000rpm
Max. Cutting Capacity Width x Height	302 x 88mm
Mitre Capacity	50 / 60°
Bevel Capacity	48 / 48°



305MM MITRE SAW

DWS780

Blade Diameter	305 x 30mm
Power Input	1675W
No Load Speed	1900 - 3800rpm
Max. Cutting Capacity Width x Height	303x110mm
Mitre Capacity	60 / 50°
Bevel Capacity	49 / 49°



MITRE SAW ATTACHMENTS

Universal Leg Stand	DE7023
Short Beam Universal Leg Stand	DE7033
Mitre Saw Rolling Leg Stand	DE7260
Heavy Duty Saw Horse	DE7035
Work Support Stop	DE7024
Mounting Bracket	DE7025
Roller Support For DE7023	DE7027
Extension Arm Support For DE7023	DE7028
Increased Width Support Stop For DE7023	DE7029
Large Mitre Bracket For DE7023	DE7030
Extension Support For DE7023	DE7031



FLIP OVER SAW ATTACHMENTS

Right Side Extension Table	DE3472
Ripping / Parallel Fence	DE3473
Adjustable Support	DE3474
Pair Of Guide Rods 500mm	DE3491
Pair Of Guide Rods 1000mm	DE3494
Material Support Plate	DE3495
Fence For Bench Mode	DE3496

250MM COMBINATION SAW

DW743N

Blade Diameter	250 x 30mm
Power Input	2000W
No Load Speed	2850rpm
Max. Cutting Capacity Width x Height Mitre	140x68mm
Max. Depth of Cut (Sawbench Position)	70mm, 180(w), 70(d)
Mitre Capacity	45 / 45°
Bevel Capacity	45°



COMBINATION SAW

D27107

Power Input	2000W
Blade Speed	4000rpm
Blade Diameter	305x30mm
Cutting Capacity at 90°/90° (W x H)	205x63mm
Bevel capacity	48°



D27107XPS - WITH XPS

305MM SLIDE TABLE TOP MITRE SAW

D27111

Power Input	1500W
Blade Speed	3000rpm
Blade Diameter	305x30mm
Cutting Capacity at 90°/90° (W x H)	220x90mm
Bevel Capacity	45°



305MM SLIDE TABLE TOP MITRE SAW

D27112

Power Input	1600W
Blade Speed	3650rpm
Blade Diameter	305x30mm
Cutting Capacity at 90°/90° (W x H)	285x90mm
Bevel Capacity	45°



305MM TABLE TOP MITRE SAW

D27113

Power Input	1600W
Blade Speed	3300rpm
Blade Diameter	305x30mm
Cutting Capacity at 90°/90° (W x H)	160x85mm
Bevel Capacity	48°



260MM TABLE TOP MITRE SAW

DW711

Power Input	1300W
Blade Speed	2750rpm
Blade Diameter	260x30mm
Cutting Capacity at 90°/90° (W x H)	125x55mm
Bevel Capacity	48°



250MM TABLE SAW

DW745

Blade Diameter	250 x 30mm
Power Input	1850W
No Load Speed	3800rpm
Max. Depth of Cut (90°)	77mm
Max. Depth of Cut (45°)	57mm
Max. Ripping Capacity Right/Left	610/315mm
Bevel Capacity	-3 to 48°



250MM TABLE SAW

DWE7491

Power Input	2000W
Blade Diameter	250 x 30mm
No Load Speed	3800rpm
Max. Depth of Cut	77mm
Max. Ripping Capacity Left/Right	558/825mm
Bevel Capacity	-3 to 48°



TABLE SAW LEG STANDS

Table Saw Rolling Stand	DE7400
Rolling Leg Stand for Table Saws	DWE74911
Scissor Leg Stand for Table Saws	DWE74912
Scissor Leg Stand for DW745	DE7450



PORTABLE THICKNESSER**DW733**

Power Input	1800W
No Load Speed	10000rpm
Max. Capacity	317mm
Max. Thicknesser Capacity	152mm
Max. Planing Depth	2mm
Feed Rate	8m/min

**PLANER THICKNESSER****D27300**

Power Input	2100W
No Load Speed	6200rpm
Max. Capacity	260mm
Max. Thicknesser Capacity	160mm
Max. Planing Depth	3mm
Feed Rate	5m/min

**BANDSAW****DW876**

Power Input	1000W
Max. Cutting Height	200mm
Max. Cutting Width	310mm
Cutting Speed	380/880m/min



BANDSAW

DW738

Power Input	749mm
Max. Cutting Height	155mm
Max. Cutting Width	310mm
Cutting Speed	330/800m/min



300MM RADIAL ARM SAW

DW721KN

Power Input	2000W
Blade Diameter	300 x 30mm
No Load Speed	3000rpm
Max. Cutting Capacity Width x Height	507 x 90mm
Mac Cutting Speed	36m/sec




350MM RADIAL ARM SAW

DW729KN

Blade Diameter	350 x 30mm
Power Input	4000W
No Load Speed	2780rpm
Max. Cutting Capacity Width x Height	525 x 110mm
Max. Cutting Speed	53m/sec





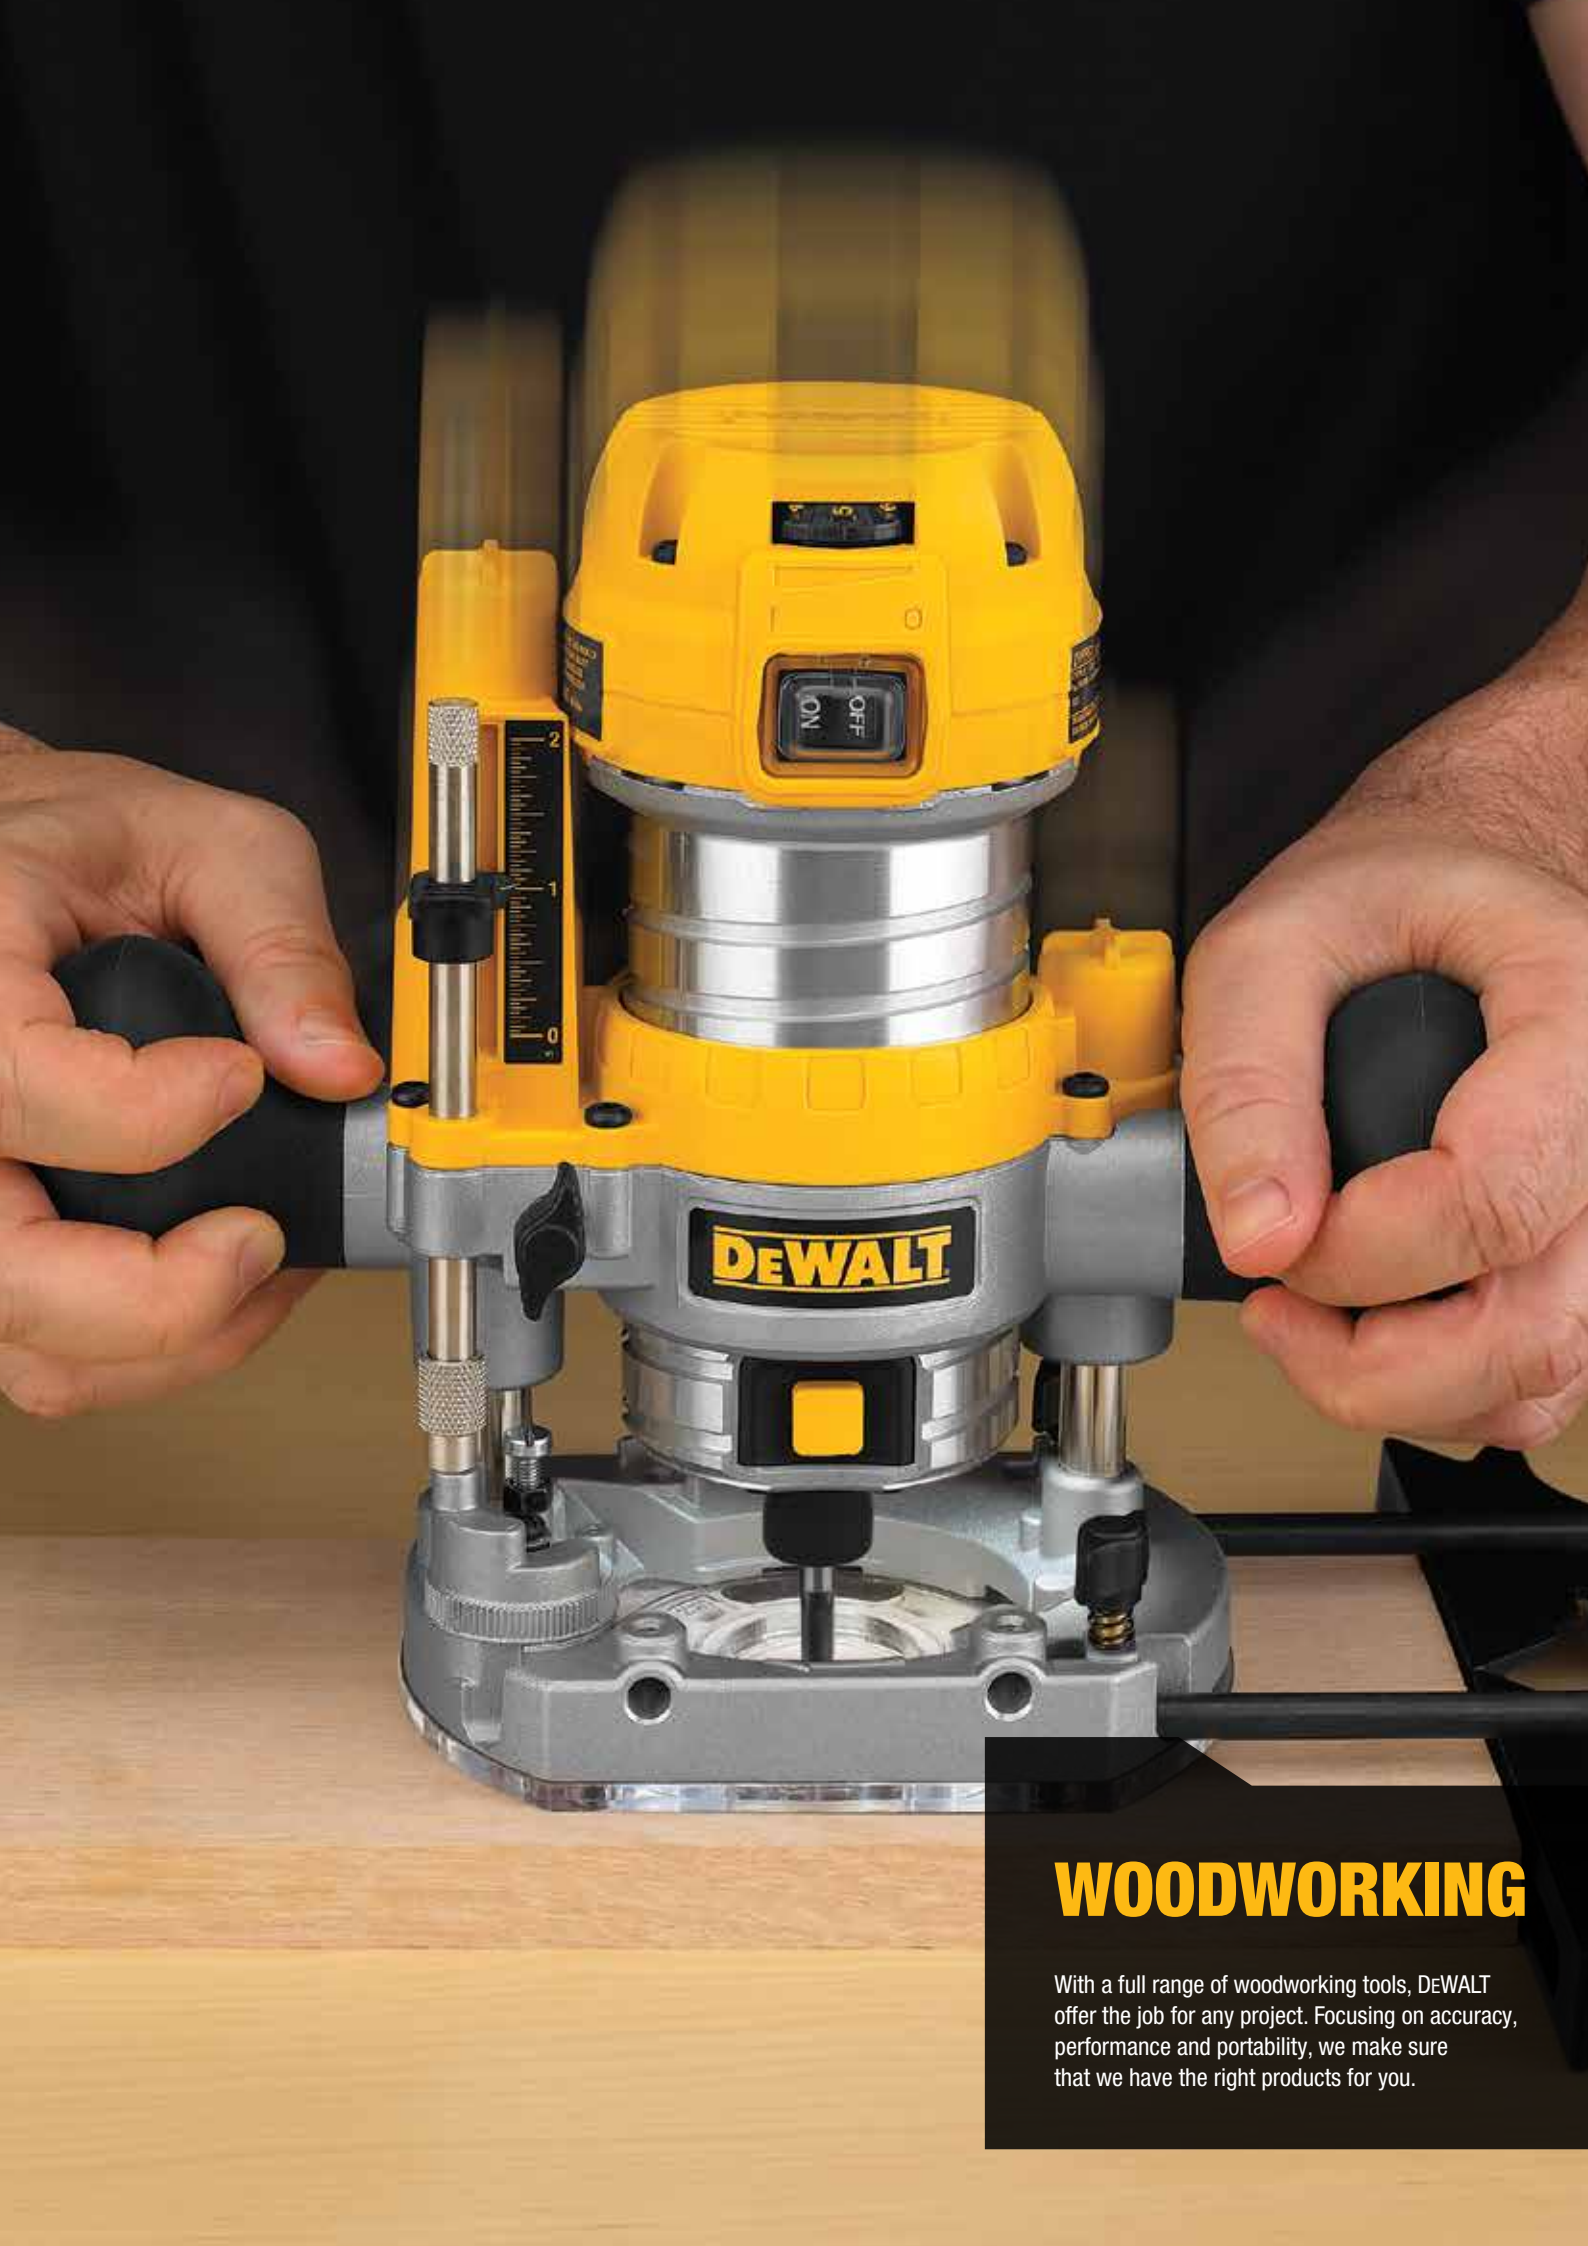

WOODWORKING

With a full range of woodworking tools, DEWALT offer the job for any project. Focusing on accuracy, performance and portability, we make sure that we have the right products for you.

OSCILLATING TOOL

DWE315KT

Power Input	300W
No Load Speed	0-22000opm
Accessory Change	Quick Release
Accessories Included	37



DWE315 - UNIT IN CARTON

165MM CIRCULAR SAW

DWE550

Blade Diameter	165x20mm
Power Input	1200W
No Load Speed	5500rpm
Max. Depth of Cut (90°)	55mm
Max. Depth of Cut (45°)	35mm
Bevel Capacity	48°



184MM CIRCULAR SAW

DWE560

Blade Diameter	184x16mm
Power Input	1350W
No Load Speed	5500rpm
Max. Depth of Cut (90°)	65mm
Max. Depth of Cut (45°)	42mm
Bevel Capacity	48°



DWE560K - INCLUDES KITBOX

190MM CIRCULAR SAW**DWE575K**

Blade Diameter	190x30mm
Power Input	1600W
No Load Speed	5200rpm
Max. Depth of Cut (90°)	67mm
Max. Depth of Cut (45°)	49mm
Bevel Capacity	57°

**190MM CIRCULAR SAW RAIL COMPATIBLE****DWE576K**

Blade Diameter	190x30mm
Power Input	1600W
No Load Speed	5200rpm
Max. Depth of Cut (90°) with Rail	61mm
Max. Depth of Cut (45°) with Rail	43mm
Bevel Capacity	57°

**235MM CIRCULAR SAW****D23700**

Blade Diameter	235x30mm
Power Input	1750W
No Load Speed	4700rpm
Max. Depth of Cut (90°)	86mm
Max. Depth of Cut (45°)	62mm
Bevel Capacity	45°



165MM PLUNGE SAW

DWS520KT

Power Input	1300W
Blade Diameter	165mm
No Load Speed	1750-4000rpm
Max. Depth of Cut (90°) with Rail	59mm
Max. Depth of Cut (90°) with Guide Rails	55mm
Max. Depth of Cut (45°) with Rail	44mm
Bevel Capacity	47°



DWS520KTR - INCLUDES 1,5M RAIL

PLUNGE SAW ATTACHMENTS

1m Guide Rail	DWS5021
1.5m Guide Rail	DWS5022
2.6m Guide Rail	DWS5023
Guide Rail Carry Bag For DWS5021 & DWS5022	DWS5025
Pair of Quick Clamps	DWS5026
Replacement Edge Strip	DWS5029
Replacement Low Friction Strip	DWS5030
Router Attachment	DWS5031
Replacement High Friction Strip	DWS5032
Joining Bar	DE6292



DE6292

TOP HANDLE JIGSAW

DW331KT

Power Input	701W
No Load Stroke Rate	0-3100spm
Max. Cutting Capacity (Wood)	130mm
Max. Cutting Capacity (Aluminium)	30mm
Max. Cutting Capacity (Steel)	12.0 mm
Bevel Capacity	0-45°
Stroke Length	26mm
Hand/Arm Vibration - cutting boards	5.0m/s ²
Hand/Arm Vibration - cutting sheet metal	6.0m/s ²



BODY GRIP JIGSAW

DW333KT

Power Input	701W
No Load Stroke Rate	800-3100spm
Max. Cutting Capacity (Wood)	130mm
Max. Cutting Capacity (Aluminium)	30mm
Max. Cutting Capacity (Steel)	12mm
Bevel Capacity	0-45°
Stroke Length	26mm
Hand/Arm Vibration - cutting boards	7.0m/s ²
Hand/Arm Vibration - cutting sheet metal	7.5m/s ²
Sound Pressure	87dB(A)
Sound Power	98dB(A)



BODY GRIP JIGSAW

DW343K

Power Input	550W
No Load Stroke Rate	1900-3100spm
Max. Cutting Capacity (Wood)	85mm
Max. Cutting Capacity (Aluminium)	20mm
Max. Cutting Capacity (Steel)	10mm
Bevel Capacity	0-45°
Stroke Length	20mm
Hand/Arm Vibration - cutting boards	7.4m/s ²
Hand/Arm Vibration - cutting sheet metal	7.8m/s ²
Sound Pressure	87dB(A)
Sound Power	96dB(A)



RECIPROCATING SAW

DWE305PK

Power Input	1100W
No Load Stroke Rate	0 - 2800spm
Max. Cutting Capacity (Wood)	280mm
Max. Cutting Capacity (Steel Section & Pipes)	100mm
Max. Cutting Capacity (PVC)	130mm
Hand/Arm Vibration - cutting Wood	19.5m/s ²
Stroke Length	29mm



COMPACT RECIPROCATING SAW

DWE357K

Power Input	1050W
No Load Stroke Rate	0 - 2800spm
Max. Cutting Capacity (Wood)	280mm
Max. Cutting Capacity (Steel Sections & Pipes)	100mm
Max. Cutting Capacity (PVC)	130mm
Stroke Length	29mm
Hand/Arm Vibration - cutting Wood	29m/s ²



HEAVY DUTY RECIPROCATING SAW

DW311K

Power Input	1200W
No Load Stroke Rate	0 - 2600spm
Max. Cutting Capacity (Wood)	300mm
Max. Cutting Capacity (Steel Sections & Pipes)	130mm
Max. Cutting Capacity (PVC)	160mm
Stroke Length	28mm
Hand/Arm Vibration - cutting Wood	23.3m/s ²



430MM ALLIGATOR SAW

DWE397

Power Input	1700W
No Load Stroke Rate	3000spm
Stroke Length	40mm
Blade Length	430mm
Blade Stop	0.2sec
Blade	TCT Class 12



DT2976-QZ 430mm Class 20 blade suitable for Poroton and Building Blocks available separately.

DWE398 - WITH 430MM ALLIGATOR BLADE, POROTON CLASS 20

DWE399 - WITH 430MM ALLIGATOR BLADE, AREATED CONCRETE

2.5MM PLANER

DW680

Power Input	600W
No Load Speed	15000rpm
Max. Depth of Cut	2.5mm
Max. Rebating Depth	12mm
Planer Width	82mm
Shoe Length	285mm
Drum Diameter	54mm



4MM PLANER

D26500K

Power Input	1050W
No Load Speed	13500rpm
Max. Depth of Cut	4mm
Max. Rebating Depth	25mm
Planer Width	82mm
Shoe Length	320mm
Drum Diameter	64mm



LAMINATE TRIMMER

DWE6005

Power Input	590W
No Load Speed	16000 - 34000rpm
Max. Cutter Diameter	29mm
Plunge	25.4mm
Collet Size	1/4"



1/4" FIXED BASE ROUTER

D26200

Power Input	900W
No Load Speed	16000 - 27000rpm
Max. Cutter Diameter	30mm
Plunge	55mm
Collet Size	1/4"



1/4" TWIN BASE ROUTER

D26204K

Power Input	900W
No Load Speed	16000 - 27000rpm
Max. Cutter Diameter	55mm
Plunge	55mm
Collet Size	1/4"



1100W ¼" (6-8MM) VARIABLE SPEED PLUNGE ROUTER**DW621K**

Power Input	1100W
No Load Speed	8000-24000rpm
Max. Cutter Diameter	36mm
Plunge Stroke	55mm
Collet Size	6-8mm

**DW621KT - DW621 IN TSTAK****VARIABLE SPEED PLUNGE ROUTER****DW622KT**

Power Input	1400W
No Load Speed	8000-24000rpm
Max. Cutter Diameter	36mm
Plunge Stroke	55mm
Collet Size	6-12.7mm

**VARIABLE SPEED PLUNGE ROUTER****DW625EKT**

Power Input	2000W
No Load Speed	8000-20000rpm
Max. Cutter Diameter	50mm
Plunge Stroke	80mm
Collet Size	6-12.7mm



BISCUIT JOINTER

DW682K

Power Input	600W
No Load Speed	10000rpm
Max. Cutter Diameter	100mm
Max. Cutting Depth	20mm
Fence Adjustment	0 - 90°



1/4 SHEET PALM SANDER

DWE6411

Power Input	230W
Orbit Size	1.6mm
Paper Size	140 x 115mm



125MM RANDOM ORBIT SANDER

DWE6423

Power Input	280W
Orbits Per Minute	8000 - 12000opm
Orbit Size	2.6mm
Paper Size	125mm



150MM RANDOM ORBIT SANDER**D26410**

Power Input	400W
Orbits Per Minute	8000 - 20000opm
Orbit Size	3.0/6.0mm
Paper Size	150mm
Rotation Speed	4000 - 10000rpm

**1/2 SHEET ELECTRONIC ORBITAL SANDER****D26420**

Power Input	350W
Orbits Per Minute	12000-22000opm
Orbit Size	2.5mm
Paper Size	112x280mm

**1/3 SHEET ELECTRONIC ORBITAL SANDER****D26422**

Power Input	350W
Orbits Per Minute	12000-22000opm
Orbit Size	2.5mm
Paper Size	93x230mm



BELT SANDER

DWP352VS

Power Input	1010W
Belt Speed	270 - 440m/min
Belt Size	75 x 533mm



HEATGUN

D26411

Power Input	1800W
Operating Temperature	50 - 600°C
Air Flow	250/450l/min
LCD Screen	No



DIGITAL HEATGUN

D26414

Power Input	2000W
Operating Temperature	50 - 600°C
Air Flow	650l/min
LCD Screen	Yes





METALWORKING & CONCRETE

Offering durability, ergonomics and power while taking into account the user's health with the Perform & Protect system. All tools are built for maximum toughness against metal and concrete.

125MM SLIDE SWITCH ANGLE GRINDER NO-VOLT
DWE4057

Power Input	800W
No Load Speed	11800rpm
Max. Disc Diameter	125mm
Vibration	9.4m/s ²


DWE4157 - UNIT WITH 900W
125MM SLIDE SWITCH ANGLE GRINDER NO-VOLT
DWE4207

Power Input	1010W
No Load Speed	11000rpm
Max. Disc Diameter	125mm
Vibration	8.3m/s ²


DWE4207K - DWE4207 IN KITBOX DWE4203 - WITH PADDLE SWITCH
125MM SLIDE SWITCH ANGLE GRINDER NO-VOLT
DWE4217

Power Input	1200W
No Load Speed	11000rpm
Max. Disc Diameter	125mm
Vibration	8.3m/s ²



125MM SLIDE SWITCH ANGLE GRINDER NO-VOLT

DWE4227

Power Input	1200W
No Load Speed	11000rpm
Max. Disc Diameter	125mm
Vibration	8.3m/s ²



125MM SLIDE SWITCH ANGLE GRINDER NO-VOLT

DWE4237

Power Input	1400W
No Load Speed	11500rpm
Max. Disc Diameter	125mm
Vibration	8.3m/s ²



DWE4237K - DWE4237 IN KITBOX DWE4233 - WITH PADDLE SWITCH

150MM SLIDE SWITCH ANGLE GRINDER NO-VOLT

DWE4238

Power Input	1400W
No Load Speed	9000rpm
Max. Disc Diameter	150mm
Vibration	7.0m/s ²



125MM SLIDE SWITCH ANGLE GRINDER VARIABLE SPEED

DWE4257

Power Input	1500W
No Load Speed	2800-10000rpm
Max. Disc Diameter	125mm
Vibration	8.3m/s ²



125MM MORTAR RAKING KIT

DWE46105

Power Input	1400W
No Load Speed	9300rpm
Max. Disc Diameter	125mm
Vibration	9.4m/s ²



115MM/125MM SURFACING SHROUD

DWE46150

Fits all DeWALT 115mm & 125mm Grinders with keyless clamp



230MM ANGLE GRINDER

DWE490

Power Input	2000W
No Load Speed	6600rpm
Max. Disc Diameter	230mm
Vibration	7.1m/s ²



230MM ANGLE GRINDER

DWE492

Power Input	2200W
No Load Speed	6600rpm
Max. Disc Diameter	230mm
Vibration	7.1m/s ²



DWE492S - DWE492 WITH SOFT START DWE494 - WITH SOFT START AND NO VOLT RELEASE

180MM ANGLE GRINDER

DWE4557

Power Input	2400W
No Load Speed	8500rpm
Max. Disc Diameter	180mm
Vibration	9.0m/s ²



230MM ANGLE GRINDER
DWE4559

Power Input	2400W
No Load Speed	6500rpm
Max. Disc Diameter	230mm
Vibration	7.0m/s ²


230MM ANGLE GRINDER
DWE4579

Power Input	2600W
No Load Speed	6500rpm
Max. Disc Diameter	230mm
Vibration	7.0m/s ²


DWE4599 - WITH AUTOBALANCER
6MM SLIDE SWITCH DIE GRINDER
DWE4884

Power Input	450W
No Load Speed	25000rpm
Vibration	4.4m/s ²



POLISHER

DWP849X

Power Input	1250W
No Load Speed	0 - 600/3500rpm
Max. Disc Diameter	230mm
Vibration	2.3m/s ²



355MM CHOPSAW

D28715

Power Input	2200W
No Load Speed	4000rpm
Disc Diameter	355mm
Max. Cutting Capacity at 90° [Square Profile]	120x120mm
Max. Cutting Capacity at 45° [Square Profile]	113x113mm



355MM CHOPSAW

DW872

Power Input	2200W
No Load Speed	1300rpm
Disc Diameter	355mm
Max. Cutting Capacity [Square Profile]	100x100mm



SLIDE TABLE WET TILE SAW & LEG STAND

D24000S

Power Input	1600W
No Load Speed	4200rpm
Blade Diameter	250x2.54mm
Depth of Cut	95mm
Max. Crosscut Capacity at 90°	610mm
Max. Crosscut Capacity at 45°	450mm



HAND HELD WET TILE SAW

DWC410

Power Source	Corded
Power Input	1300W
No Load Speed	13000rpm
Blade Diameter	110x20mm
Depth of Cut	34mm




FINISHING/GRINDING MACHINE

DW753

Power Source	Corded
Power Input	415W
No Load Speed	2750rpm
Wheel Diameter	150mm
Belt Size	577x40mm



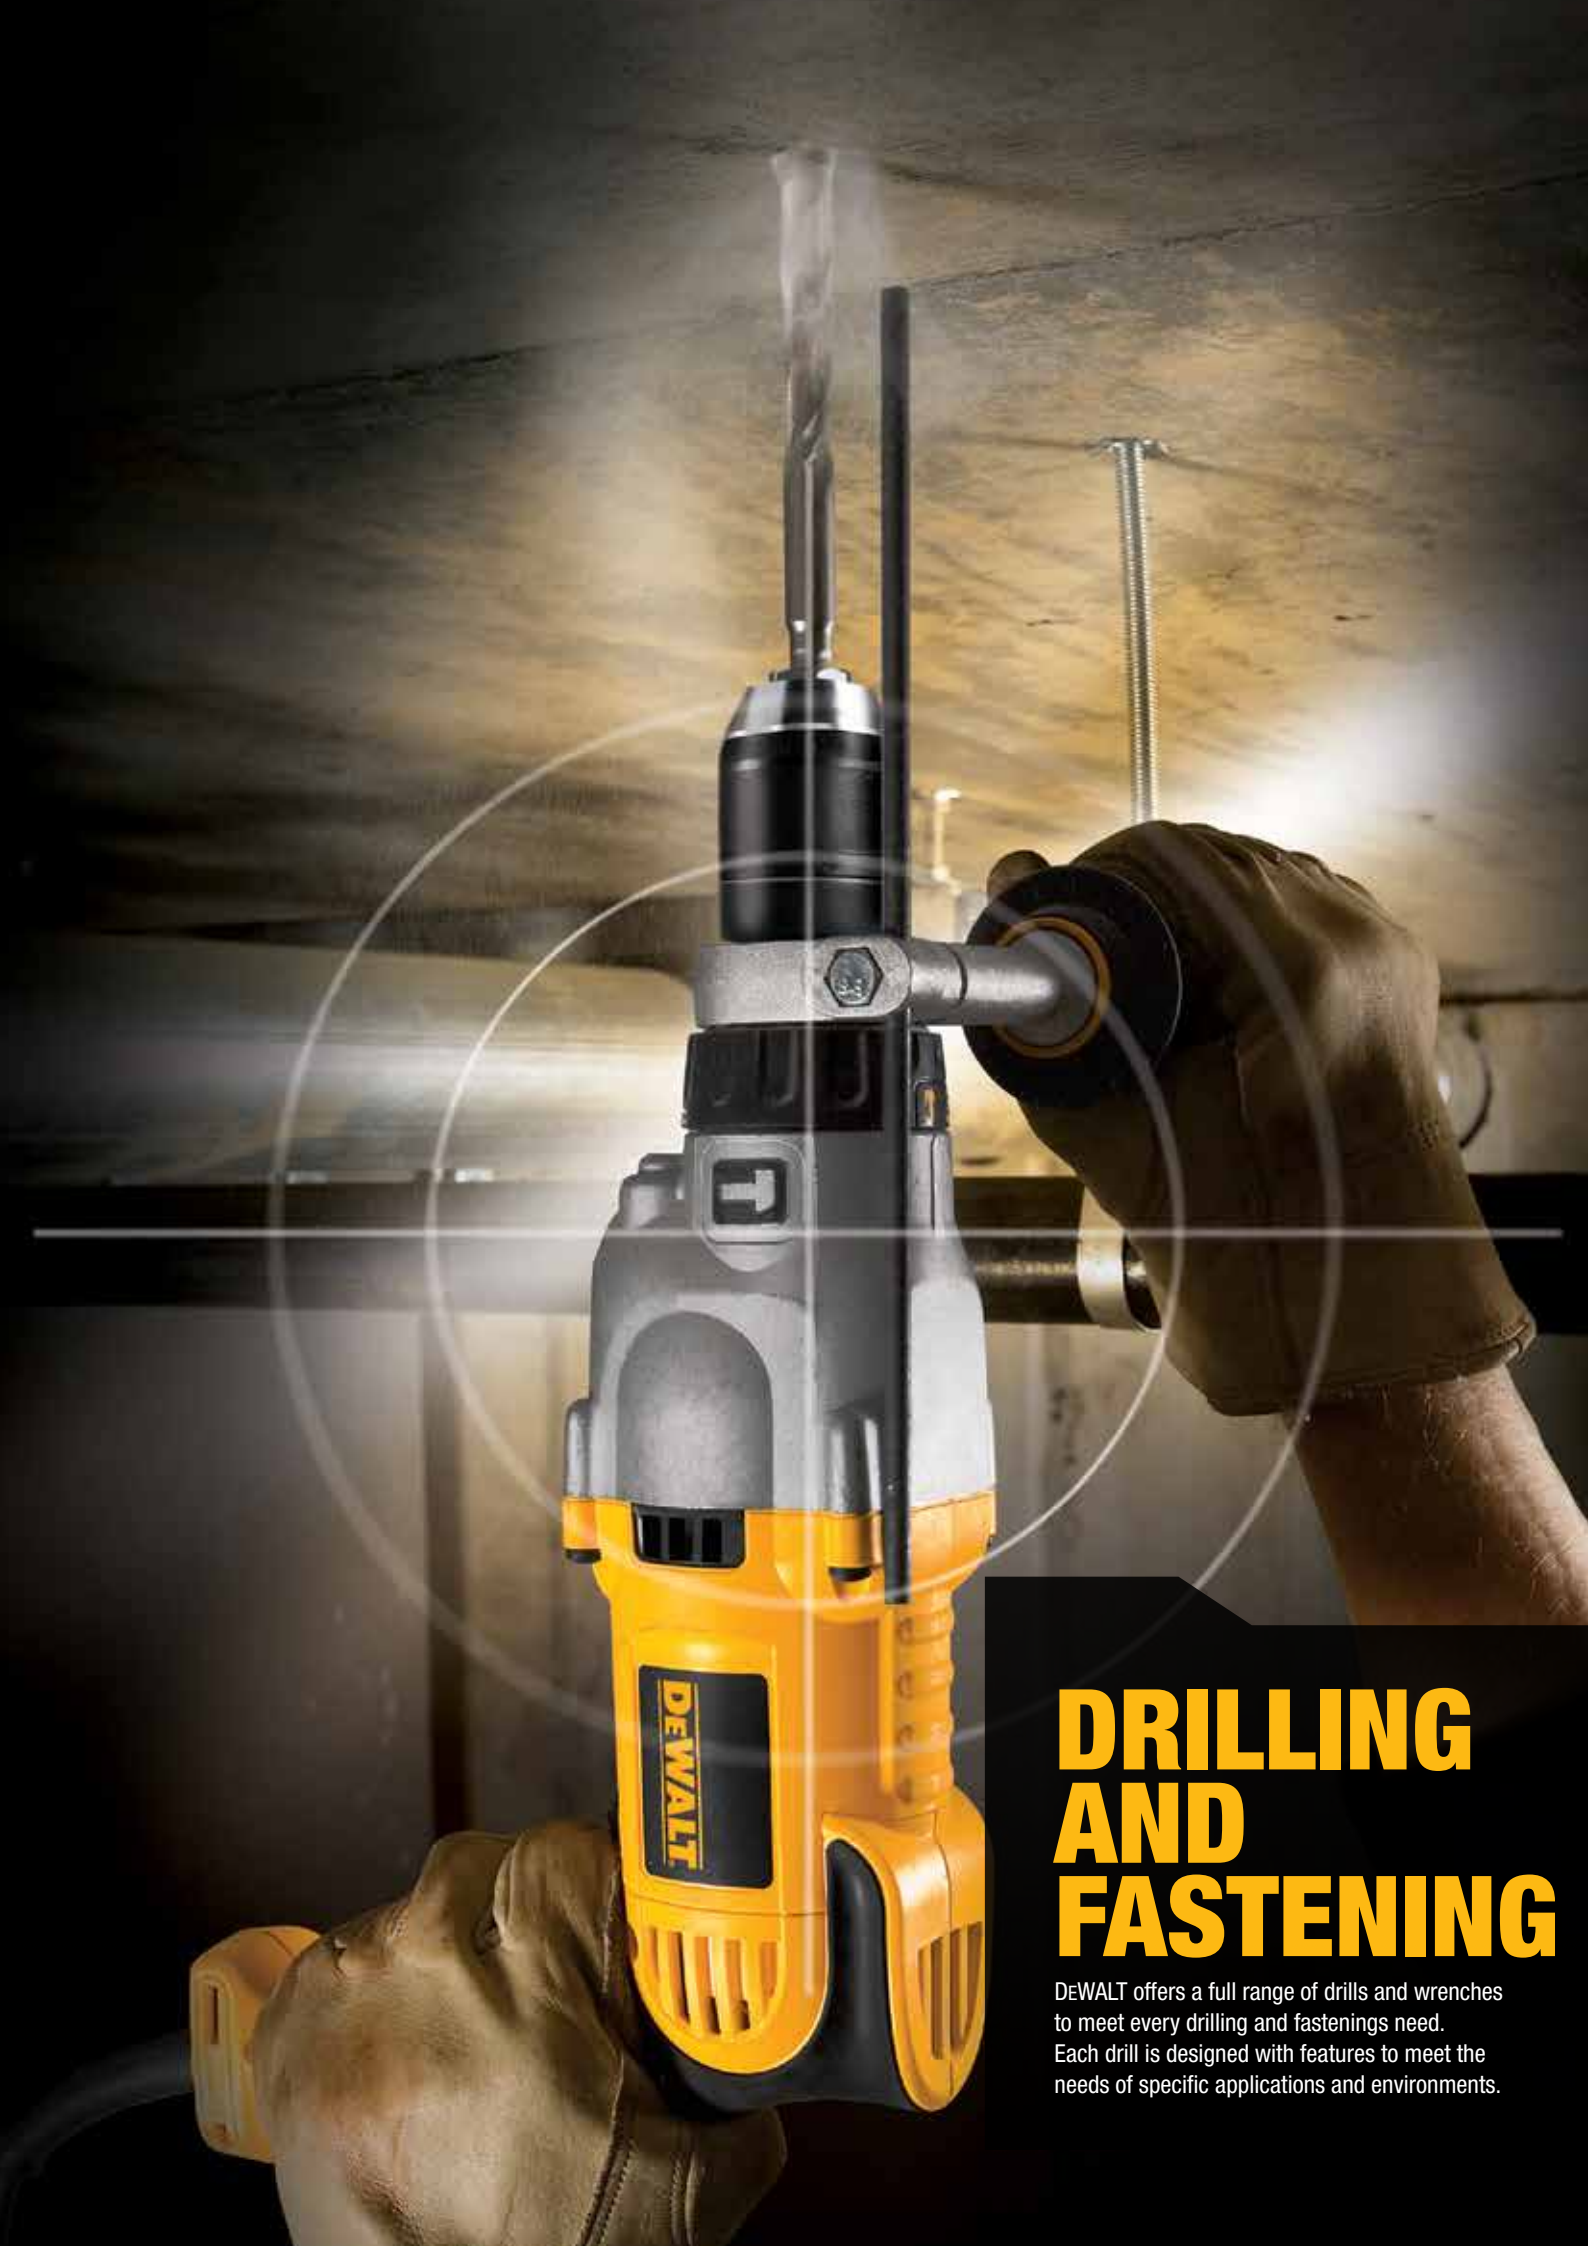

DRILLING AND FASTENING

DEWALT offers a full range of drills and wrenches to meet every drilling and fastenings need. Each drill is designed with features to meet the needs of specific applications and environments.

RIGHT ANGLE DRILL

D21160

Power Input	350W
No Load Speed	0 - 1200rpm
Max. Drilling Capacity Wood	20mm



2 SPEED ROTARY DRILL WITH CLUTCH

D21441

Power Input	770W
No Load Speed	0-1100/0-2700rpm
Max. Drilling Capacity Wood	35mm
Max. Drilling Capacity Steel	13mm
Max. Torque	40/20



13MM MIXER AND ROTARY DRILL

D21520

Power Input	710W
No Load Speed	0-550
Chuck Capacity	2.0-13
Max. Paddle Size	160mm
Max. Torque (Hard)	50Nm



D21510 WITH M14 FITMENT

HIGH SPEED ROTARY DRILL

DW217

Power Input	675W
No Load Speed	0-4000rpm
Max. Drilling Capacity Wood	20mm
Max. Drilling Capacity Steel	8mm
Max. Torque	8.2Nm



ROTARY DRILL

DW221

Power Input	701W
No Load Speed	0-2500rpm
Max. Drilling Capacity Wood	25mm
Max. Drilling Capacity Steel	10mm
Max. Torque	13.8Nm



ROTARY DRILL

DWD014S

Power Input	550W
No Load Speed	0-2800rpm
Max. Drilling Capacity Wood	25mm
Max. Drilling Capacity Steel	10mm
Max. Torque	7.9Nm



ROTARY DRILL

DWD112S

Power Input	701W
No Load Speed	0-2500rpm
Max. Drilling Capacity Wood	25mm
Max. Drilling Capacity Steel	10mm
Max. Torque	10.9Nm



LOW SPEED ELECTRONIC ROTARY DRILL

DWD221

Power Input	800W
No Load Speed	0-650rpm
Max. Drilling Capacity Wood	38mm
Max. Drilling Capacity Steel	13mm
Max. Torque	40Nm



2 SPEED MAGNETIC DRILL PRESS 50MM

DWE1622K

Power Input	1200W
No Load Speed	300/450rpm
Max. Cutting Depth with Cutters	50mm
Max. Cutting Diameter with Cutters	50mm
Length of Drill Stroke	147mm



2 SPEED PERCUSSION DRILL

D21721K

Power Input	650W
No Load Speed	0-1100/2600rpm
Max. Drilling Capacity Wood	40/25mm
Max. Drilling Capacity Steel	13mm
Max. Drilling Capacity Concrete	16mm
Max. Torque	30/12Nm
Beats Per Minute	0-19000/44200bpm



2 SPEED PERCUSSION DRILL

D21805KS

Power Input	770W
No Load Speed	0-1100/2700rpm
Max. Drilling Capacity Wood	35mm
Max. Drilling Capacity Steel	13mm
Max. Drilling Capacity Concrete	20mm
Max. Torque	40/20Nm
Beats Per Minute	0-18700/45900bpm



PERCUSSION DRILL

DWD024S

Power Input	701W
No Load Speed	0-2800rpm
Max. Drilling Capacity Wood	25mm
Max. Drilling Capacity Steel	13mm
Max. Drilling Capacity Concrete	16mm
Max. Torque	8.6Nm
Beats Per Minute	0-47600bpm



DWD024KS INCLUDING KITBOX

2 SPEED PERCUSSION DRILL

DWD522KS

Power Input	950W
No Load Speed	0-1250/3500rpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Steel	13mm
Max. Drilling Capacity Concrete	20mm
Max. Torque	40/20Nm
Beats Per Minute	0-56000bpm



PERCUSSION DRILL

DWD524KS

Power Input	1100W
No Load Speed	0 - 1250/3500rpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Metal	13mm
Max. Drilling Capacity Masonry	22mm
Max. Torque	40Nm
Beats Per Minute	0 - 56000bpm



1300W 2 SPEED PERCUSSION DRILL

DWD530KS

Power Input	1300W
No Load Speed	0-1250/0-3500rpm
Max. Drilling Capacity Wood	40mm
Max. Drilling Capacity Steel	16mm
Max. Drilling Capacity Concrete	22mm
Max. Torque	40/20Nm
Beats Per Minute	0-56000bpm



IMPACT WRENCH

DW292

Power Input	710W
No Load Speed	0 - 2200rpm
Max. Torque	440Nm
Impacts Per Minute	2700ipm
Tool Holder	1/2"
Max. Bolt Diameter	M20



HIGH SPEED DRYWALL SCREWDRIVER

DW275KN

Power Input	540W
No Load Speed	0-5300rpm
Max. Screw Diameter	4.8mm
Tool Holder	(Hex) 6.35mm
Hand/Arm Vibration	<2.5m/s ²





DUST MANAGEMENT

Advanced Dust Extraction Solutions.

The Perform & Protect dust certification logo guarantees that the risks of dust inhalation are considerably reduced, to work in a cleaner and more secure environment.

L-CLASS DUST EXTRACTOR

DWV901L

Power Input	1400W
Max Airflow	4080l/min
Capacity	30l
Power Take Off Rating*	2200W
Wet/Dry	Yes



*@ 240V



DWV901LT - INCLUDES TSTAK ATTACHMENT

M-CLASS DUST EXTRACTOR

DWV902M

Power Input	1400W
Max Airflow	4080l/min
Capacity	38l
Power Take Off Rating*	2200W
Wet/Dry	Yes



*@ 240V



DWV902L - L-CLASS DUST EXTRACTOR

DUST EXTRACTOR ACCESSORIES

Replacement Filter for DWV900, DWV901 and DWV902	DWV9340
Disposable Plastic Liner for DWV902M (Pack of 5)	DWV9400
Paper Bag for DWV902M (Pack of 5)	DWV9401
Fleece Bag for DWV902M (Pack of 5)	DWV9402
TSTAK Vac Rack Attachment	DWV9500



DWV9340



DWV9401



DWV9402



DWV9500

AIRLOCK ATTACHMENTS



Airlock Adaptor	DWV9000
Airlock Tapered Adaptor	DWV9110
Airlock Stepped Adaptor	DWV9120
Airlock 35mm Adaptor	DWV9130
Airlock 35mm Angle Adaptor	DWV9150
Airlock Construction Kit	DWV9210
Airlock Woodworking Kit	DWV9220
Floor Cleaning Kit for DWV901L / DWV902M (AirLock)	DWV9350
Dust Extractor Hose	DWV9315
Dust Extractor Hose	DWV9316



DWV9000

DWV9110



DWV9130



DWV9120



DWV9150



DWV9210



DWV9220



DWV9316



DWV9315



DWV9350

DRILLING DUST EXTRACTION SYSTEM & HOLE CLEANING

DWH050

Compatible with	54V
Max. Drill Bit Diameter	52mm
Weight	0.6kg



CHISELLING DUST EXTRACTION SYSTEM**DWH051**

Compatible with	Corded
Max. Chisel Diameter	27mm
Weight	0.8kg

**DEMOLITION DUST EXTRACTION SYSTEM****DWH052K**

Compatible with	Corded
Max. Chisel Diameter	32mm
Weight	0.85kg
Applications	Chipping



STORAGE



Storage solutions that fit every situation.

A Mobile & Modular Storage System TOUGHSystem



Unbeatable toughness, performance and protection:

- 4mm thick reinforced polypropylene plastic
- Heavy duty metal latches and metal hinges
- Dust tight and water jet resistant (IP65) to withstand the most severe weather conditions

Site Tough Flexible Storage System TSTAK



Stack boxes in a variety of configurations:

- Strong, easy to use interlocking system
- Can be configured to your exact requirements
- Features such as metal latches and ball bearing slides provide reliability

Heavy Duty Bags and Pouches SOFTStorage



Lightweight, convenient solutions that will stand up to everyday use in a heavy construction environment:

- Pockets compatible with DEWALT Organiser cups
- 1200 Denier – strong and durable polyester fabric
- Rugged PVC Bottom cover – waterproof & protects from wear and tear
- Double reinforced front pockets

TSTAK RADIO

DWST1-81079



Width	465mm
Height	380mm
Depth	165mm
IP Rating	54
Battery Platform	10.8V/18V/54V XR batteries
Speakers	6 inc. 2 subwoofers
Screen	Colour
Output	45W



Bluetooth, DAB+, FM, AM, 3.5mm AUX and Fast Charge USB

TOUGHSYSTEM RADIO

DWST1-75663



Width	545mm
Height	155mm
Depth	360mm
IP Rating	54
Charges	14.4/18V XR batteries
Speakers	6 inc. 2 subwoofers
Screen	Orange & Black
Output	40W



Bluetooth, DAB+, FM, AM, 3.5mm AUX and USB
Rubber overmold for the toughest jobsites

TOUGHSYSTEM ORGANISER

DWST1-75522

Width	543mm
Height	100mm
Depth	350mm
IP Rating	65



TOUGHSYSTEM JOB SITE RADIO AND CHARGER

DWST1-75659

Width	370mm
Length	540mm
Height	158mm



TOUGHSYSTEM DS150**1-70-321**

Width	550mm
Height	158mm
Depth	336mm
IP Rating	65

**TOUGHSYSTEM DS280****DWST1-75654**

Width	558mm
Height	277mm
Depth	330mm

**TOUGHSYSTEM DS300****1-70-322**

Width	550mm
Height	306mm
Depth	366mm
IP Rating	65



TOUGHSYSTEM DS400

1-70-323

Width	550mm
Height	408mm
Depth	366mm
IP Rating	65



TOUGHSYSTEM DS450

DWST1-75668

Width	480mm
Height	597mm
Depth	99mm
IP Rating	65



TOUGHSYSTEM KIT

1-70-349

DS150	1-70-321
DS300	1-70-322
DS400	1-70-323
Trolley	1-70-324
Width	508mm
Height	1092mm
Depth	660mm
IP Rating	65



TOUGHSYSTEM DS290 2 DRAWER**DWST1-80123**

Width	554mm
Height	340mm

**TOUGHSYSTEM DS295 3 DRAWER****DWST1-81055**

Width	554mm
Height	340mm
Depth	307mm

**TOUGHSYSTEM WORKSHOP STORAGE SOLUTION****DWST1-75694**

Width	650mm
Length	329mm
Height	1806mm
Max. Load Weight	30 per pair of brackets / 200 staking per Rack kg

No TOUGHSYSTEM boxes are included

**TOUGHSYSTEM DS404 COOLER BOX****DWST1-81333**

Length	55.2cm
Width	36.8cm
Height	48.3cm
IP Rating	65
Insulation	Commercial grade
Ice Retention	Up to 5 days
Load Capacity	50kg / 25.5L



TOUGHSYSTEM ACCESSORIES

Trolley	1-70-324
Spare Brackets	1-70-362
Foam Insert For DS150	DWST7-97150
Workshop Racking	DWST1-75694



1-70-362



DWST1-75694



1-70-324



TSTAK I

DWST1-70704

Width	40mm
Height	331mm
Depth	185mm



TSTAK II

DWST1-70703

Width	440mm
Height	331mm
Depth	176mm



TSTAK III**DWST1-70705**

Width	440mm
Height	314mm
Depth	176mm
Drawer	Yes
Cups	Yes

**TSTAK IV****DWST1-70706**

Width	440mm
Height	314mm
Depth	176mm

**TSTAK V****DWST1-71194**

Width	440mm
Height	145mm
Depth	332mm



TSTAK VI

DWST1-71195

Width	440mm
Height	301mm
Depth	332mm



TSTAK COMBO

DWST1-70702

Width	440mm
Height	331mm
Depth	326mm
TSTAK II	DWST1-70703
TSTAK IV	DWST1-70706



TSTAK TOTE

DWST1-71228

Width	440mm
Height	275mm
Depth	320mm



TSTAK RADIO

DWST1-81079

Width	490mm
Height	700mm
Depth	205mm



TSTAK DEEP

DWST1-75774

Width	442mm
Height	380mm
Depth	323mm



TSTAK MOBILE STORAGE

DWST1-75799

Width	435mm
Height	1000mm
Depth	512mm



TSTAK CART

DWST1-71229

Width	486mm
Height	181mm
Depth	436mm



TSTAK ACCESSORIES

DWST1-71196

Width	490mm
Height	700mm
Length	285mm



TOUGHSYSTEM ACCESSORIES

DWST1-72364

Width	300mm
Length	430mm
TSTAK Foam Inlay	DWST1-72364



VAN RACKING SYSTEM - STANDARD/HIGH

DWST1-81042/DWST1-81045

Width	1040mm
Depth	100mm
Height (Standard/High)	1633mm/2143mm
Max. Load	70kg

No TOUGHSYSTEM boxes are included



DWST1-81042

DWST1-81045

TOOL BACK PACK

DWST1-81690

Width	340mm
Height	470mm
Depth	230mm



TOTE BAG**1-79-208**

Width	338mm
Height	323mm
Depth	380mm

**RIGID TOP BAG****1-79-209**

Width	500mm
Height	310mm
Depth	300mm

**ROUND TOP BAG****1-79-211**

Width	500mm
Height	330mm
Depth	310mm

**WHEELED DUFFLE BAG****DWST1-79210**

Width	305mm
Height	318mm
Length	699mm

**MULTI PURPOSE****DWST1-75551**

Width	270mm
Height	340mm
Depth	120mm

**APRON****DWST1-75552**

Width	120mm
Height	390mm
Depth	560mm



NAIL

DWST1-75650

Width	290mm
Height	360mm
Depth	180mm



TOOL BELT

DWST1-75651

Width	1390mm
Height	140mm
Depth	15mm



HAMMER & NAIL

DWST1-75652

Width	280mm
Height	370mm
Depth	170mm



DRILL HOLSTER

DWST1-75653

Width	170mm
Height	305mm
Depth	45mm



LEATHER BELT

DWST1-75661

Width	1409mm
Height	58mm
Depth	18mm



HAMMER LOOP

DWST1-75662

Width	125mm
Height	140mm
Depth	70mm





AIR TOOL

THE DeWALT PNEUMATIC RANGE

The DeWALT range of pneumatic nailing tools has been tested to endure the toughest of environments with the ability to run at temperatures as low as -40°C . With no combustion exhaust gasses or sensitive batteries these tools can be used in poorly ventilated areas and damp conditions making a DeWALT pneumatic nailer the number one choice for reliability, power and performance.

Framing nailers are ideal for roof framing and trusses, sub floors, joist hangers and beams, decking and flooring and stud walling. Pneumatic coil nailers feature high capacity magazines for ultimate productivity with tools for sidings and roofing as well as heavy duty applications.

The DeWALT pneumatic range also includes a wide selection of specialist tools that can make light work of any second fix application, including finish nailers, brad nailers and staplers.

PAPER TAPE & WIRE WELD FRAMING NAILER



33° LIGHTWEIGHT FRAMING NAILER IDEAL FOR PROLONGED USE IN THE TOUGHEST ENVIRONMENTS

DPN9033SM-XJ / DPN9033-XJ

Designed to drive 90mm ring shank nails in to the toughest timber. Tool-free depth adjustment and sequential firing allows for precision placement.

Description	DPN9033SM-XJ	DPN9033-XJ
Weight	3.5 kg	3.6 kg
Trigger Type	Sequential	Sequential
Magazine Capacity	38-50	38-75
Operating Pressure (BAR)	8.3	8.3
Operating Pressure (PSI)	120	120
Fastener Type	33° Paper Tape & Wire Weld Stick Nails	33° Paper Tape & Wire Weld Stick Nails
Fastener Range	50-90 mm	50-90 mm



33° HIGH POWER FRAMING NAILER IDEAL FOR DRIVING LONGER NAILS UP TO 100MM

DPN10033-XJ

Ideal for firing longer length nails, this 33° framing nailer delivers powerful and consistent performance. Features include tool-free depth adjustment and sequential firing for accuracy.

Description	DPN10033-XJ
Weight	3.9 kg
Trigger Type	Sequential
Magazine Capacity	38-50
Operating Pressure (BAR)	8.4
Operating Pressure (PSI)	120
Fastener Type	33° Paper Tape & Wire Weld Stick Nails
Fastener Range	57-100mm





PAPER TAPE & WIRE WELD FRAMING NAILER

DNPT - 33° PAPER TAPE STICK NAILS

CAT NO.	DESCRIPTION	QTY.
2.8-3.1 MM PLAIN D-HEAD BRIGHT 33°		
● DNPT2863Z	2.8 X 63 MM PLAIN BRIGHT D-HEAD	2200
● DNPT3190Z	3.1 X 63 MM PLAIN BRIGHT D-HEAD	2200
2.8-3.1 MM PLAIN D-HEAD GALVANISED 12 µm 33°		
● DNPT2863G12Z	2.8 X 63 MM PLAIN GALVANISED D-HEAD	2200
● DNPT3190G12Z	3.1 X 90 MM PLAIN GALVANISED D-HEAD	2200
2.8-3.1 MM BARBED D-HEAD HOT DIP GALVANISED 33°		
● DNPT28B50HDZ	2.8 X 50 MM BARBED HOT DIP GALVANISED D-HEAD	1200
● DNPT28B63HDZ	2.8 X 63 MM BARBED HOT DIP GALVANISED D-HEAD	1200
● DNPT28B75HDZ	2.8 X 75 MM BARBED HOT DIP GALVANISED D-HEAD	1200
● DNPT31B90HDZ	3.1 X 90 MM BARBED HOT DIP GALVANISED D-HEAD	1200
2.8-3.1 MM BARBED FULL-HEAD HOT DIP GALVANISED 33°		
● DNPT028B50HDZ	2.8 X 50 MM BARBED HOT DIP GALVANISED FULL-HEAD	1200
● DNPT028B63HDZ	2.8 X 63 MM BARBED HOT DIP GALVANISED FULL-HEAD	1200
● DNPT028B75HDZ	2.8 X 75 MM BARBED HOT DIP GALVANISED FULL-HEAD	1200
● DNPT031B90HDZ	3.1 X 90 MM BARBED HOT DIP GALVANISED FULL-HEAD	1200
2.8-3.1 MM RING D-HEAD BRIGHT 33°		
● DNPT28R50Z	2.8 X 50 MM RING BRIGHT D-HEAD	2200
● DNPT28R63Z	2.8 X 63 MM RING BRIGHT D-HEAD	2200
● DNPT28R75Z	2.8 X 75 MM RING BRIGHT D-HEAD	2200
● DNPT31R90Z	3.1 X 90 MM RING BRIGHT D-HEAD	2200
2.8-3.1 MM RING D-HEAD GALVANISED 12 µm 33°		
● DNPT28R50G12Z	2.8 X 50 MM RING GALVANISED D-HEAD	2200
● DNPT28R63G12Z	2.8 X 63 MM RING GALVANISED D-HEAD	2200
● DNPT28R75G12Z	2.8 X 75 MM RING GALVANISED D-HEAD	2200
● DNPT31R90G12Z	3.1 X 90 MM RING GALVANISED D-HEAD	2200
2.8-3.1 MM RING D-HEAD HOT DIP GALVANISED 33°		
● DNPT28R50HDZ	2.8 X 50 MM RING HOT DIP GALVANISED D-HEAD	1200
● DNPT28R63HDZ	2.8 X 63 MM RING HOT DIP GALVANISED D-HEAD	1200
● DNPT31R75HDZ	3.1 X 75 MM RING HOT DIP GALVANISED D-HEAD	1200
● DNPT31R90HDZ	3.1 X 90 MM RING HOT DIP GALVANISED D-HEAD	1200
● DNPT31R100HDZ	3.1 X 98 MM RING HOT DIP GALVANISED D-HEAD	1200
2.8-3.1 MM RING FULL-HEAD HOT DIP GALVANISED 33°		
● DNPT028R50HDZ	2.8 X 50 MM RING HOT DIP GALVANISED FULL-HEAD	1200
● DNPT028R63HDZ	2.8 X 63 MM RING HOT DIP GALVANISED FULL-HEAD	1200
● DNPT028R75HDZ	2.8 X 75 MM RING HOT DIP GALVANISED FULL-HEAD	1200
● DNPT031R90HDZ	3.1 X 90 MM RING HOT DIP GALVANISED FULL-HEAD	1200
● DNPT031R100HDZ	3.1 X 98 MM RING HOT DIP GALVANISED FULL-HEAD	1200
2.8 MM RING D-HEAD STAINLESS STEEL A2 33°		
● DNPT28R63SZ	2.8 X 63 MM RING STAINLESS A2 D-HEAD	1.200
2.8-3.1 MM RING FULL-HEAD STAINLESS STEEL A4 33°		
● DNPT028R75S316Z	2.8 X 75 MM RING STAINLESS A4 FULL-HEAD	1200
● DNPT031R90S316Z	3.1 X 90 MM RING STAINLESS A4 FULL-HEAD	1200

DNW - 33° WIRE WELD STICK NAILS

CAT NO.	DESCRIPTION	QTY.
2.8-3.1 MM PLAIN BRIGHT D-HEAD 33°		
● DNW2850E	2.8 X 50 MM PLAIN BRIGHT D-HEAD	2200
● DNW2863E	2.8 X 63 MM PLAIN BRIGHT D-HEAD	2200
● DNW2870E	2.8 X 70 MM PLAIN BRIGHT D-HEAD	2200
● DNW2880E	2.8 X 80 MM PLAIN BRIGHT D-HEAD	2200
● DNW2890E	2.8 X 90 MM PLAIN BRIGHT D-HEAD	2200
● DNW3180E	3.1 X 80 MM PLAIN BRIGHT D-HEAD	2200
● DNW3190E	3.1 X 90 MM PLAIN BRIGHT D-HEAD	2200
2.8-3.1 MM RING D-HEAD BRIGHT 33°		
● DNW28R50E	2.8 X 50 MM RING BRIGHT D-HEAD	2200
● DNW28R63E	2.8 X 63 MM RING BRIGHT D-HEAD	2200
● DNW28R70E	2.8 X 70 MM RING BRIGHT D-HEAD	2200
● DNW28R75E	2.8 X 75 MM RING BRIGHT D-HEAD	2200
● DNW28R80E	2.8 X 80 MM RING BRIGHT D-HEAD	2200
● DNW28R90E	2.8 X 90 MM RING BRIGHT D-HEAD	2200
● DNW31R70E	3.1 X 70 MM RING BRIGHT D-HEAD	2200
● DNW31R75E	3.1 X 75 MM RING BRIGHT D-HEAD	2200
● DNW31R80E	3.1 X 80 MM RING BRIGHT D-HEAD	2200
● DNW31R90E	3.1 X 90 MM RING BRIGHT D-HEAD	2200
3.1 MM PLAIN D-HEAD GALVANISED 12 µm 33°		
● DNW3190G12E	3.1 X 90 MM PLAIN G12 D-HEAD	2200
2.8-3.1 MM RING D-HEAD GALVANISED 12 µm 33°		
● DNW28R50G12E	2.8 X 50 MM RING G12 D-HEAD	2200
● DNW28R63G12E	2.8 X 63 MM RING G12 D-HEAD	2200
● DNW28R75G12E	2.8 X 75 MM RING G12 D-HEAD	2200
● DNW31R90G12E	3.1 X 90 MM RING G12 D-HEAD	2200

PLASTIC COLLATED FRAMING NAILERS



ROUND HEAD FRAMING NAILER IDEAL FOR PROLONGED USE IN THE TOUGHEST ENVIRONMENTS DPN9017PL-XJ / DPN9021PL-XJ

Specially designed to drive 90mm stick nails in to the toughest woods, the tool-free depth adjustment and sequential firing allows for quick and accurate working.

Description	DPN9017PL-XJ	DPN9021PL-XJ
Weight	3.6 kg	3.7 kg
Trigger Type	Sequential	Sequential
Magazine Capacity	50-75	25-75
Operating Pressure (BAR)	8.3	8.3
Operating Pressure (PSI)	120	120
Fastener Type	17° Plastic Collated	21° Plastic Collated
Fastener Range	50-90 mm	45-90 mm



DPN9017PL



DNP17 - 17° PLASTIC COLLATED STICK NAILS

CAT NO.	DESCRIPTION	QTY.
2.8-3.1 MM PLAIN FULL-HEAD BRIGHT 17°		
● DNP172860Z	2.8 X 60 MM PLAIN BRIGHT FULL-HEAD	1500
● DNP172875Z	2.8 X 75 MM PLAIN BRIGHT FULL-HEAD	1500
● DNP173190Z	3.1 X 90 MM PLAIN BRIGHT FULL-HEAD	1500
2.8-3.1 MM PLAIN FULL-HEAD HOT DIPPED GALVANISED 17°		
● DNP172850HDZ	2.8 X 50 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
● DNP172860HDZ	2.8 X 60 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
● DNP172875HDZ	2.8 X 75 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
● DNP173190HDZ	3.1 X 90 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
2.8-3.1 MM BARBED FULL-HEAD HOT DIPPED GALVANISED 17°		
● DNP1728850HDZ	2.8 X 50 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
● DNP1728860HDZ	2.8 X 60 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
● DNP1728875HDZ	2.8 X 75 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
● DNP1731890HDZ	3.1 X 90 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
2.8-3.1 MM RING FULL-HEAD HOT DIPPED GALVANISED 17°		
● DNP1728R50HDZ	2.8 X 50 MM HOT DIP GALVANISED FULL-HEAD	1500
● DNP1728R60HDZ	2.8 X 60 MM HOT DIP GALVANISED FULL-HEAD	1500
● DNP1728R75HDZ	2.8 X 75 MM HOT DIP GALVANISED FULL-HEAD	1500
● DNP1731R90HDZ	3.1 X 90 MM HOT DIP GALVANISED FULL-HEAD	1500

DNP21 - 21° PLASTIC COLLATED STICK NAILS

CAT NO.	DESCRIPTION	QTY.
2.8-3.1 MM PLAIN FULL-HEAD BRIGHT 21°		
● DNP212860Z	2.8 X 60 MM PLAIN BRIGHT FULL-HEAD	1500
● DNP212875Z	2.8 X 75 MM PLAIN BRIGHT FULL-HEAD	1500
● DNP213190Z	3.1 X 90 MM PLAIN BRIGHT FULL-HEAD	1500
2.8-3.1 MM PLAIN FULL-HEAD HOT DIPPED GALVANISED 21°		
● DNP212850HDZ	2.8 X 50 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
● DNP212860HDZ	2.8 X 60 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
● DNP212875HDZ	2.8 X 75 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
● DNP213190HDZ	3.1 X 90 MM PLAIN HOT DIP GALVANISED FULL-HEAD	1500
2.8-3.1 MM BARBED FULL-HEAD HOT DIPPED GALVANISED 21°		
● DNP2128850HDZ	2.8 X 50 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
● DNP2128860HDZ	2.8 X 60 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
● DNP2128875HDZ	2.8 X 75 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
● DNP2131890HDZ	3.1 X 90 MM BARBED HOT DIP GALVANISED FULL-HEAD	1500
2.8-3.1 MM RING FULL-HEAD HOT DIPPED GALVANISED 21°		
● DNP2128R50HDZ	2.8 X 50 MM RING HOT DIP GALVANISED FULL-HEAD	1500
● DNP2128R60HDZ	2.8 X 60 MM RING HOT DIP GALVANISED FULL-HEAD	1500
● DNP2128R75HDZ	2.8 X 75 MM RING HOT DIP GALVANISED FULL-HEAD	1500
● DNP2131R90HDZ	3.1 X 90 MM RING HOT DIP GALVANISED FULL-HEAD	1500



METAL CONNECTING NAILER



METAL CONNECTING NAILER FOR FAST INSTALLATION OF CONNECTING PLATES AND HANGERS

DPN250MCN-XJ

Specifically designed with an exposed nail tip for accurate fastening of metal connecting plates and hangers to wood. This tool includes a 360° exhaust port to release air away from you while you work.

Description	DPN250MCN-XJ
Weight	2.63 kg
Trigger Type	Sequential
Magazine Capacity	29
Operating Pressure (BAR)	8.4
Operating Pressure (PSI)	120
Fastener Type	MCN Nails
Fastener Range	40 / 50 / 60 mm

DNM - MCN NAILS

CAT NO.	DESCRIPTION	QTY.
ANCHOR NAIL 4.0 MM RING GALVANISED 12 µm 33° 8 MM HEAD		
● DNM40R40GZ	40 MM RING ANCHOR NAIL GALVANISED	2000
● DNM40R50GZ	50 MM RING ANCHOR NAIL GALVANISED	2000
● DNM40R60GZ	60 MM RING ANCHOR NAIL GALVANISED	2000
ANCHOR NAIL 4.0 MM RING HOT DIP GALVANISED 33° 8 MM HEAD		
● DNM40R40HDZ	40 MM RING ANCHOR NAIL HOT DIP GALVANISED	1500
● DNM40R50HDZ	50 MM RING ANCHOR NAIL HOT DIP GALVANISED	1500
● DNM40R60HDZ	60 MM RING ANCHOR NAIL HOT DIP GALVANISED	1500



**F SERIES
COIL NAILERS**



**LIGHTWEIGHT COIL NAILER WITH HIGH CAPACITY MAGAZINE AND DEPTH ADJUST
DPN75C-XJ**

The DPN75C-XJ coil nailer offers a real alternative to heavier and larger tools. Perfect for high-volume nailing with the ability to drive a wide range of nail lengths reliably and consistently.

Description	DPN75C-XJ
Weight	2.49 kg
Trigger Type	Sequential
Magazine Capacity	225-300
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	F Series Coil Nails
Fastener Range	38-75 mm



**POWERFUL COIL NAILER WITH UP TO 300 NAIL MAGAZINE CAPACITY FOR ULTIMATE PRODUCTIVITY
DPN90C-XJ**

This lightweight, high capacity, coil nailer has been designed to increase productivity and maximise comfort. Features include 360° exhaust, depth adjustment and twist adjustable magazine.

Description	DPN90C-XJ
Weight	3.6 kg
Trigger Type	Sequential
Magazine Capacity	225-300
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	F Series Coil Nails
Fastener Range	50-90 mm





F SERIES COIL NAILERS

DNF - F SERIES COIL NAILS

CAT NO.	DESCRIPTION	QTY.
COIL NAILS 2.5 MM PLAIN BRIGHT		
DNF2560E	COIL NAIL 2.5 X 60 MM PLAIN	9000
DNF2564E	COIL NAIL 2.5 X 64 MM PLAIN	7200
DNF2570E	COIL NAIL 2.5 X 70 MM PLAIN	7200
COIL NAILS 2.5 MM RING BRIGHT		
DNF25R50E	COIL NAIL 2.5 X 50 MM RING BRIGHT	9900
DNF25R60E	COIL NAIL 2.5 X 60 MM RING BRIGHT	9000
DNF25R70E	COIL NAIL 2.5 X 70 MM RING BRIGHT	7200
COIL NAILS 2.5 MM RING HOT DIP GALVANISED		
DNF25R40HDZ	COIL NAIL 2.5 X 40 MM RING HOT DIP GALVANISED	1200
DNF25R45HDZ	COIL NAIL 2.5 X 45 MM RING HOT DIP GALVANISED	1200
COIL NAILS 2.5 MM RING STAINLESS STEEL A4 AISI 316		
DNF25R50S316E	COIL NAIL 2.5 X 50 MM RING SS316	5940
DNF25R55S316E	COIL NAIL 2.5 X 55 MM RING SS316	5940
DNF25R70S316E	COIL NAIL 2.5 X 70 MM RING SS316	3600
COIL NAILS 2.8 MM RING BRIGHT		
DNF28R55E	COIL NAIL 2.8 X 55 MM RING BRIGHT	7500
DNF28R60E	COIL NAIL 2.8 X 60 MM RING BRIGHT	7500
DNF28R65E	COIL NAIL 2.8 X 65 MM RING BRIGHT	6000
DNF28R90E	COIL NAIL 2.8 X 90 MM RING BRIGHT	4500

CAT NO.	DESCRIPTION	QTY.
COIL NAILS 2.8 MM RING GALVANISED 12 µm		
DNF28R55G12E	COIL NAIL 2.8 X 55 MM RING GALVANISED	7500
COIL NAILS 2.8 MM BARBED HOT DIP GALVANISED		
DNF28B50HDZ	COIL NAIL 2.8 X 50 MM BARBED HOT DIP GALVANISED	1200
DNF28B63HDZ	COIL NAIL 2.8 X 63 MM BARBED HOT DIP GALVANISED	1200
DNF28B75HDZ	COIL NAIL 2.8 X 75 MM BARBED HOT DIP GALVANISED	1200
COIL NAILS 2.8 MM RING HOT DIP GALVANISED		
DNF28R50HDZ	COIL NAIL 2.8 X 50 MM RING HOT DIP GALVANISED	1200
DNF28R63HDZ	COIL NAIL 2.8 X 63 MM RING HOT DIP GALVANISED	1200
DNF28R75HDZ	COIL NAIL 2.8 X 75 MM RING HOT DIP GALVANISED	1200
COIL NAILS 3.1 MM RING BRIGHT		
DNF31R80E	COIL NAIL 3.1 X 80 MM RING BRIGHT	5400
COIL NAILS 3.1 MM BARBED HOT DIP GALVANISED		
DNF31B90HDZ	COIL NAIL 3.1 X 90 MM BARBED HOT DIP GALVANISED	1200
COIL NAILS 3.1 MM RING HOT DIP GALVANISED		
DNF31R90HDZ	COIL NAIL 3.1 X 90 MM RING HOT DIP GALVANISED	1200
COIL NAILS 3.1 MM RING STAINLESS STEEL A4 AISI 316		
DNF31R70S316E	COIL NAIL 3.1 X 70 MM RING SS316	2700
DNF31R90S316E	COIL NAIL 3.1 X 90 MM RING SS316	2700



AIR POWER

THE **DeWALT PNEUMATIC RANGE** INCLUDES COMPRESSORS DESIGNED FOR THE TOUGH DEMANDS OF THE JOB SITE.

SEE PAGE PAGE 132 FOR DETAILS.

N SERIES COIL NAILER



COMPACT COIL NAILER WITH 225 NAIL MAGAZINE CAPACITY MAKING IT IDEAL FOR PROLONGED USE

DPN64C-XJ

This tough and resilient coil nailer has a high capacity nail magazine and lightweight housing, making it the ideal tool for prolonged use.

Description	DPN64C-XJ
Weight	2.21 kg
Trigger Type	Sequential
Magazine Capacity	225
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	N Series Coil Nails
Fastener Range	32-64 mm



DNN - N SERIES COIL NAILS

CAT NO.	DESCRIPTION	QTY.
COIL NAILS 2.03 MM RING GALVANISED 12 µm		
DNN20R35G12E	COIL NAIL 2.03 X 35 MM RING GALVANISED	21000
DNN20R38G12E	COIL NAIL 2.03 X 38 MM RING GALVANISED	17500
DNN20R45G12E	COIL NAIL 2.03 X 45 MM RING GALVANISED	17500
DNN20R50G12E	COIL NAIL 2.03 X 50 MM RING GALVANISED	14000
DNN20R55G12E	COIL NAIL 2.03 X 55 MM RING GALVANISED	14000
COIL NAILS 2.03 MM BARBED HOT DIP GALVANISED		
DNN20B35HDZ	COIL NAIL 2.03 X 35 MM BARBED HOT DIP GALVANISED	2600
DNN20B40HDZ	COIL NAIL 2.03 X 40 MM BARBED HOT DIP GALVANISED	2000
DNN20B45HDZ	COIL NAIL 2.03 X 45 MM BARBED HOT DIP GALVANISED	2000
DNN20B50HDZ	COIL NAIL 2.03 X 50 MM BARBED HOT DIP GALVANISED	2000

CAT NO.	DESCRIPTION	QTY.
COIL NAILS 2.03 MM RING HOT DIP GALVANISED		
DNN20R35HDZ	COIL NAIL 2.03 X 35 MM RING HOT DIP GALVANISED	2600
DNN20R40HDZ	COIL NAIL 2.03 X 40 MM RING HOT DIP GALVANISED	2000
DNN20R45HDZ	COIL NAIL 2.03 X 45 MM RING HOT DIP GALVANISED	2000
DNN20R50HDZ	COIL NAIL 2.03 X 50 MM RING HOT DIP GALVANISED	2000
COIL NAIL 2.3 MM RING BRIGHT		
DNF23R64E	COIL NAIL 2.3 X 64 MM RING BRIGHT	10500
COIL NAIL 2.3 MM BARBED HOT DIP GALVANISED		
DNN23B63HDZ	COIL NAIL 2.3 X 63 MM BARBED HOT DIP GALVANISED	1400
COIL NAIL 2.3 MM RING HOT DIP GALVANISED		
DNN23R63HDZ	COIL NAIL 2.3 X 63 MM RING HOT DIP GALVANISED	1400
COIL NAIL 2.3 MM RING STAINLESS STEEL A4 AISI 316		
DNN23R55S316E	COIL NAIL 2.3 X 55 MM RING STAINLESS A4 AISI 316	6600



R SERIES ROOFING COIL NAILER



COMPACT ROOFING COIL NAILER WITH SHINGLES GUIDE FOR RAPID FIXING OF ROOF SHINGLES & INSULATION

DPN46RN-XJ

With an impact resistant magazine, this tough but lightweight coil nailer is designed specifically for fixing roofing and insulation. Features such as a twist adjustable magazine, depth adjustment and sequential firing allow for quick and accurate work.

Description	DPN46RN-XJ
Weight	2.32 kg
Trigger Type	Sequential
Magazine Capacity	120
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	R Series Coil Nails
Fastener Range	19-45 mm

DNR - R SERIES COIL NAILS

CAT NO.	DESCRIPTION	QTY.
GALVANISED COIL NAILS 12 µm 3,05 MM 10.1 MM HEAD 15°		
DNR3119GZ	COIL NAIL 19 MM GALVANISED HEAD	7200
DNR3122GZ	COIL NAIL 22 MM GALVANISED HEAD	7200
DNR3132GZ	COIL NAIL 32 MM GALVANISED HEAD	7200

CAT NO.	DESCRIPTION	QTY.
HOT DIP GALVANISED COIL NAILS 3,05 MM 10,1 MM HEAD 15°		
DNR3119HDZ	COIL NAIL 19 MM HOT DIP GALVANISED HEAD	1200
DNR3122HDZ	COIL NAIL 22 MM HOT DIP GALVANISED HEAD	1200
DNR3132HDZ	COIL NAIL 32 MM HOT DIP GALVANISED HEAD	1200
DNR3138HDZ	COIL NAIL 38 MM HOT DIP GALVANISED HEAD	1200
DNR3145HDZ	COIL NAIL 45 MM HOT DIP GALVANISED HEAD	1200

15GA ANGLED FINISH NAILERS



15 GAUGE PRECISION POINT ANGLED FINISH NAILER FOR EASIER ACCESS IN CONFINED SPACES AND IMPROVED ACCURACY

DPN1564APP-XJ

The DPN1564APP-XJ is not only oil-free, minimising maintenance, but it is also fitted with an advanced design Precision Point™ nose, which has a unique contact detect system for reduced marking of work surface.

Description	DPN1564APP-XJ
Weight	1.8 kg
Trigger Type	Selectable
Magazine Capacity	129
Operating Pressure (BAR)	8.4
Operating Pressure (PSI)	120
Fastener Type	15 Gauge Angled Finish Nails
Fastener Range	32-64 mm



15 GAUGE ANGLED FINISH NAILER GIVES IMPROVED ACCESS IN CONFINED SPACES

DPN1564A-XJ

With its selectable trigger system and integrated air blower, this finish nailer makes light work of even the most demanding of applications. The oil-free tool design requires minimal maintenance and eliminates the risk of oil stains on the work piece.

Description	DPN1564A-XJ
Weight	1.8 kg
Trigger Type	Sequential
Magazine Capacity	129
Operating Pressure (BAR)	8.4
Operating Pressure (PSI)	120
Fastener Type	15 Gauge Angled Finish Nails
Fastener Range	32-64 mm

DNBDA15 - 15 GAUGE ANGLED FINISH

CAT NO.	DESCRIPTION	QTY.
FINISH NAILS 1.8 MM GALVANISED		
DNBDA1532GZ	33° 15GA FINISH NAIL 32 MM GALVANISED	4000
DNBDA1538GZ	33° 15GA FINISH NAIL 38 MM GALVANISED	4000
DNBDA1545GZ	33° 15GA FINISH NAIL 45 MM GALVANISED	4000
DNBDA1550GZ	33° 15GA FINISH NAIL 50 MM GALVANISED	4000
DNBDA1564GZ	33° 15GA FINISH NAIL 64 MM GALVANISED	4000

CAT NO.	DESCRIPTION	QTY.
FINISH NAILS 1.8 MM STAINLESS STEEL A2 AISI 304		
DNBDA1538SZ	33° 15GA FINISH NAIL 38 MM SS304	4000
DNBDA1550SZ	33° 15GA FINISH NAIL 50 MM SS304	4000



16GA ANGLED FINISH NAILERS



16 GAUGE PRECISION POINT FINISH NAILER FOR MAXIMUM PERFORMANCE WITH IMPROVED ACCURACY

DPN1664PP-XJ

This lightweight Precision Point™ finish nailer has a reduced nose tip for improved accuracy and visibility plus tool-free depth adjustment control for added precision.

Description	DPN1664PP-XJ
Weight	1.7 kg
Trigger Type	Selectable
Magazine Capacity	110
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	16 Gauge Straight Finish Nails
Fastener Range	25-64 mm

16 GAUGE LIGHTWEIGHT FINISH NAILER FOR MAXIMUM PERFORMANCE AND MINIMAL MAINTENANCE

DPN1664-XJ

A long life, maintenance-free, pneumatic finish nailer with a 360° exhaust for easier working. Oil free and with a non-marking tip, this tool minimises damage or staining on the work piece.

Description	DPN1664-XJ
Weight	1.8 kg
Trigger Type	Sequential
Magazine Capacity	129
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	15 Gauge Angled Finish Nails
Fastener Range	32-64 mm



DNBSB16 - 16 GAUGE FINISH NAILS

CAT NO.	DESCRIPTION	QTY.
FINISH NAILS 1.6 MM GALVANISED		
DNBSB1625Z	16GA FINISH NAIL 25 MM GALVANISED	5000
DNBSB1632Z	16GA FINISH NAIL 32 MM GALVANISED	2500
DNBSB1638Z	16GA FINISH NAIL 38 MM GALVANISED	2500
DNBSB1645Z	16GA FINISH NAIL 45 MM GALVANISED	2500
DNBSB1650Z	16GA FINISH NAIL 50 MM GALVANISED	2500
DNBSB1657Z	16GA FINISH NAIL 57 MM GALVANISED	2500
DNBSB1664Z	16GA FINISH NAIL 64 MM GALVANISED	2500

CAT NO.	DESCRIPTION	QTY.
FINISH NAILS 1.6 MM STAINLESS STEEL A4 AISI 316		
DNBSB1618S316Z	16GA FINISH NAIL 18 MM STAINLESS STEEL A4	2500
DNBSB1622S316Z	16GA FINISH NAIL 22 MM STAINLESS STEEL A4	2500
DNBSB1625S316Z	16GA FINISH NAIL 25 MM STAINLESS STEEL A4	2500
DNBSB1632S316Z	16GA FINISH NAIL 32 MM STAINLESS STEEL A4	2500
DNBSB1638S316Z	16GA FINISH NAIL 38 MM STAINLESS STEEL A4	2500
DNBSB1650S316Z	16GA FINISH NAIL 50 MM STAINLESS STEEL A4	2500

18GA BRAD NAILERS



18 GAUGE BRAD NAILER WITH PRECISION POINT NOSE FOR UNPARALLED ACCURACY

DPN1850PP-XJ

The DPN1850PP brad nailer offers a unique contact detect system for reduced marking of work surface. It also features a tool-free depth adjust control and jam mechanism for quick nail removal.

Description	DPN1850PP-XJ
Weight	1.24 kg
Trigger Type	Selectable
Magazine Capacity	100
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	18 Gauge Brad Nails
Fastener Range	15-50 mm



18 GAUGE BRAD NAILER WITH MAXIMUM PERFORMANCE AND MINIMUM MAINTENANCE

DPN1850-XJ

An incredibly lightweight yet powerful brad nailer that can be used to drive into the hardest of woods. Oil free, this tool requires minimum maintenance and offers a host of features including a rear exhaust and tool free depth adjustment.

Description	DPN1850-XJ
Weight	1.2 kg
Trigger Type	Sequential
Magazine Capacity	100
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	18 Gauge Brad Nails
Fastener Range	15-55 mm



DNBT18 - 18 GAUGE BRAD NAILS

CAT NO.	DESCRIPTION	QTY.
BRAD NAILS 1.2 MM GALVANISED		
DNBT1815GZ	18GA BRAD NAIL 15 MM GALVANISED	5000
DNBT1820GZ	18GA BRAD NAIL 20 MM GALVANISED	5000
DNBT1825GZ	18GA BRAD NAIL 25 MM GALVANISED	5000
DNBT1830GZ	18GA BRAD NAIL 30 MM GALVANISED	5000
DNBT1835GZ	18GA BRAD NAIL 35 MM GALVANISED	5000
DNBT1838GZ	18GA BRAD NAIL 38 MM GALVANISED	5000
DNBT1840GZ	18GA BRAD NAIL 40 MM GALVANISED	5000
DNBT1845GZ	18GA BRAD NAIL 45 MM GALVANISED	5000
DNBT1850GZ	18GA BRAD NAIL 50 MM GALVANISED	5000

CAT NO.	DESCRIPTION	QTY.
BRAD NALS 1.2 MM STAINLESS STEEL A2 AISI 304		
DNBT1820SZ	18GA BRAD NAIL 20 MM STAINLESS STEEL	5000
DNBT1825SZ	18GA BRAD NAIL 25 MM STAINLESS STEEL	5000
DNBT1830SZ	18GA BRAD NAIL 30 MM STAINLESS STEEL	5000
DNBT1835SZ	18GA BRAD NAIL 35 MM STAINLESS STEEL	5000
DNBT1840SZ	18GA BRAD NAIL 40 MM STAINLESS STEEL	5000
DNBT1845SZ	18GA BRAD NAIL 45 MM STAINLESS STEEL	5000
DNBT1850SZ	18GA BRAD NAIL 50 MM STAINLESS STEEL	5000



2IN1 BRAD NAILER & STAPLER



IDEAL SECOND FIX COMBINATION TOOL DRIVES BOTH BRADS AND STAPLES FOR ULTIMATE FLEXIBILITY

DPSB2IN1-XJ

Packed with features this 2in1 tool will make light work of your second fix applications. It drives a wide range of fasteners and offers an adjustable deflector and rubber grip for increased comfort.

Description	DPSB2IN1-XJ
Weight	1.2 kg
Trigger Type	Sequential
Magazine Capacity	100
Operating Pressure (BAR)	7
Operating Pressure (PSI)	100
Fastener Type	18 Gauge Brad Nails & SX Staples
Fastener Range	15-40 mm

DNBT18 - 18 GAUGE BRAD NAILS

CAT NO.	DESCRIPTION	QTY.
BRAD NAILS 1.2 MM GALVANISED		
DNBT1815GZ	18GA BRAD NAIL 15 MM GALVANISED	5000
DNBT1820GZ	18GA BRAD NAIL 20 MM GALVANISED	5000
DNBT1825GZ	18GA BRAD NAIL 25 MM GALVANISED	5000
DNBT1830GZ	18GA BRAD NAIL 30 MM GALVANISED	5000
DNBT1835GZ	18GA BRAD NAIL 35 MM GALVANISED	5000
DNBT1838GZ	18GA BRAD NAIL 38 MM GALVANISED	5000
DNBT1840GZ	18GA BRAD NAIL 40 MM GALVANISED	5000
DNBT1845GZ	18GA BRAD NAIL 45 MM GALVANISED	5000
DNBT1850GZ	18GA BRAD NAIL 50 MM GALVANISED	5000
BRAD NAILS 1.2 MM STAINLESS STEEL A2 AISI 304		
DNBT1820SZ	18GA BRAD NAIL 20 MM STAINLESS STEEL	5000
DNBT1825SZ	18GA BRAD NAIL 25 MM STAINLESS STEEL	5000
DNBT1830SZ	18GA BRAD NAIL 30 MM STAINLESS STEEL	5000
DNBT1835SZ	18GA BRAD NAIL 35 MM SS304	5000
DNBT1840SZ	18GA BRAD NAIL 40 MM STAINLESS STEEL	5000
DNBT1845SZ	18GA BRAD NAIL 45 MM STAINLESS STEEL	5000
DNBT1850SZ	18GA BRAD NAIL 50 MM STAINLESS STEEL	5000

DSTSX - SX STAPLES

CAT NO.	DESCRIPTION	QTY.
GALVANISED STAPLES 5.6 MM 6000 SERIES		
DSTSX12Z	SX STAPLE 12 MM GALVANISED	5000
DSTSX15Z	SX STAPLE 15 MM GALVANISED	5000
DSTSX19Z	SX STAPLE 19 MM GALVANISED	5000
DSTSX22Z	SX STAPLE 22 MM GALVANISED	5000
DSTSX25Z	SX STAPLE 25 MM GALVANISED	3000
DSTSX30Z	SX STAPLE 30 MM GALVANISED	3000
DSTSX35Z	SX STAPLE 35 MM GALVANISED	3000
STAINLESS STEEL A2 AISI 304 STAPLES 5.6 MM 6000 SERIES		
DSTSX18SE	SX STAPLE 18 MM SS304	5000
DSTSX25SE	SX STAPLE 25 MM SS304	5000
DSTSX28SE	SX STAPLE 28 MM SS304	3000
DSTSX30SE	SX STAPLE 30 MM SS304	3000
DSTSX35SE	SX STAPLE 35 MM SS304	3000

23GA HEADLESS PINNER



LIGHTWEIGHT HEADLESS PINNER FOR FINE DETAIL WORK AND PRECISION FASTENING DPN2330-XJ

A lightweight compact detail pinner, perfect for fine intricate work without marking work surface thanks to its compact nose and power adjustment.

Description	DPN2330-XJ
Weight	0.98 kg
Trigger Type	Trigger
Magazine Capacity	200
Operating Pressure (BAR)	7
Operating Pressure (PSI)	100
Fastener Type	23 Series Pins
Fastener Range	10-30 mm





SX SERIES CONSTRUCTION STAPLER



HIGH QUALITY, HEAVY DUTY, PROFESSIONAL STAPLER MAKES LIGHT WORK OF CONSTRUCTION STAPLING APPLICATIONS
DPSSX38-XJ

Long life, maintenance-free, professional stapler with a rear exhaust port to release air away from you and the work surface. Oil free and with a non-marking tip, this stapler delivers perfect results.

Description	DPSSX38-XJ
Weight	1.36 kg
Trigger Type	Sequential
Magazine Capacity	100
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	SX Staples
Fastener Range	12-38 mm

DSTSX - SX STAPLES

CAT NO.	DESCRIPTION	QTY.
GALVANISED STAPLES 5.6 MM 6000 SERIES		
DSTSX12Z	SX STAPLE 12 MM GALVANISED	5000
DSTSX15Z	SX STAPLE 15 MM GALVANISED	5000
DSTSX19Z	SX STAPLE 19 MM GALVANISED	5000
DSTSX22Z	SX STAPLE 22 MM GALVANISED	5000
DSTSX25Z	SX STAPLE 25 MM GALVANISED	3000
DSTSX30Z	SX STAPLE 30 MM GALVANISED	3000
DSTSX35Z	SX STAPLE 35 MM GALVANISED	3000
STAINLESS STEEL A2 AISI 304 STAPLES 5.6 MM 6000 SERIES		
DSTSX18SE	SX STAPLE 18 MM SS304	5000
DSTSX25SE	SX STAPLE 25 MM SS304	5000
DSTSX28SE	SX STAPLE 28 MM SS304	3000
DSTSX30SE	SX STAPLE 30 MM SS304	3000
DSTSX35SE	SX STAPLE 35 MM SS304	3000



11MM CROWN STAPLER



HEAVY DUTY, INSULATION AND BOARD STAPLER FOR CONSTRUCTION APPLICATIONS DPSSL540-XJ

The small and compact design of this narrow crown stapler allows for better access to the workspace with quick depth adjustment and selectable trigger systems.

Description	DPSSL540-XJ
Weight	1.53 kg
Trigger Type	Selectable
Magazine Capacity	157
Operating Pressure (BAR)	8.3
Operating Pressure (PSI)	120
Fastener Type	DST500 Staples
Fastener Range	15-40mm



DST500 - 500 SERIES STAPLES

CAT NO.	DESCRIPTION	QTY.
GALVANISED STAPLES 11.2 MM 500 SERIES		
DST50025GZ	500 STAPLE 25 MM GALVANISED	5000
DST50030GZ	500 STAPLE 30 MM GALVANISED	5000
DST50035GZ	500 STAPLE 35 MM GALVANISED	5000
DST50040GZ	500 STAPLE 40 MM GALVANISED	5000



80 SERIES WIDE-CROWN STAPLER



HIGH QUALITY, HEAVY DUTY, **WIDE CROWN STAPLER** MAKES LIGHT WORK OF FIXING SHEET MATERIALS **DPS8016-XJ**

An aluminium body makes this stapler extremely light, and with its rear exhaust and power adjustment control this tool will keep you working cleanly, quickly and efficiently.

Description	DPS8016-XJ
Weight	0.81 kg
Trigger Type	Trigger
Magazine Capacity	139
Operating Pressure (BAR)	8.4
Operating Pressure (PSI)	120
Fastener Type	80 Series Staples
Fastener Range	4-16 mm

DST80 - 80 SERIES STAPLES

CAT NO.	DESCRIPTION	QTY.
GALVANISED STAPLES 12.8 MM 800 SERIES		
DST8006Z	STAPLE 6 MM GALVANISED	10000
DST8008Z	STAPLE 8 MM GALVANISED	10000
DST8010Z	STAPLE 10 MM GALVANISED	10000
DST8012Z	STAPLE 12 MM GALVANISED	10000
DST8014Z	STAPLE 14 MM GALVANISED	10000
DST8016Z	STAPLE 16 MM GALVANISED	5000



FIRST & SECOND FIX COMPRESSORS & AIR LINE



HIGH PERFORMANCE COMPRESSOR DESIGNED TO POWER UP TO 2 FIRST FIX TOOLS AT ONCE

DPC16PS-QS

This robust 16L compressor has been engineered to deliver long lasting performance with enough power to run two first fix tools at the same time. An integrated rollcage and high impact tyres ensures on-site durability.



MEDIUM SIZED COMPRESSOR WITH TWIN OUTLETS AND ROLLCAGE FOR ADDED PROTECTION ON SITE **SUITABLE FOR FIRST & SECOND FIX**

DPC10RC-QS

On site compressor with balanced design for easy portability and an all-over steel rollcage for tough environments. Includes twin outputs and easy to use regulator.



QUIET COMPRESSOR WITH TWIN OUTLETS AND ROLLCAGE FOR LOW NOISE ON SITE

DPC10QTC-QS

Designed for maximum performance with reduced noise output. Includes a tough rollcage and an oil-free low maintenance design. Ideal for the workshop or on site.



PORTABLE, HIGH POWER TO WEIGHT RATIO COMPRESSOR DESIGNED FOR SMALL AND MEDIUM TOOLS

DPC6MRC-QS

An extremely portable compressor with a superb power to weight ratio that delivers maximum performance in a lightweight and compact design.

Description	DPC16PS-QS	DPC10RC-QS	DPC10QTC-QS	DPC6MRC-QS
Tank Size (L)	16	10	9.4	6
Volts (ac)	230	230	230	230
Power _{peak} Horse power / kW	2.5 / 1.8	2.0 / 1.5	-	1.5 / 1.1
Power _{running} Horse power / kW	2.3 / 1.7	1.85 / 1.4	1.5 / 1.1	1.5 / 1.1
Pump Type	Lubricated	Oil-Free	Oil-Free	Oil-Free
Max Working Pressure (BAR / PSI)	10 / 145	10 / 145	13.8 / 200	8 / 116
Air Displacement (l/min / cfm)	240 / 8.4	216 / 7.6	119 / 4.2	170 / 6.0
Air Delivery (l/min / cfm)	150 / 5.3	82 / 2.9	82 / 2.9	75 / 2.6
Weight	37.5 kg	17.5 kg	20.4 kg	12.8 kg



**30M AIR LINE AND SWIVELLING REEL
DWP-CPACK30**

The swivelling hose reel enables hose extension at any angle, and quick retraction.

Description	DWP-CPACK30
Length	30m
Max Pressure (BAR/PSI)	15 / 214



COMPRESSOR & TOOL COMPATIBILITY GUIDE

SMALL					
	DPS8016	DPSL540	DPSX38	DPSB2IN1	DPN1664
	DPN1664PP	DPN1850	DPN1850PP	DPN2330	
MEDIUM					
	DPN1564APP	DPN1564A	DPN46RN		
LARGE					
	DPN10033	DPN9033	DPN9033SM	DPN9017PL	DPN9021PL
	DPN250MCN	DPN90C	DPN75C	DPN64C	
TOOL CAPACITY	Each compressor can supply air for a certain number of tools of that specific size depending on its tank capacity and air delivery:	S M	S M L	S M	S S M M L L
	DPC6MRC	DPC10RC	DPC10QTC	DPC16PS	

The number of tools suggested is for guidance only. It is applicable only to that tool size and does not account for a mixture of different tool sizes being used at the same time.



YEAR GUARANTEE UPON REGISTRATION
ANNI GARANZIA UPON REGISTRATION
JAHRE GARANTIE UPON REGISTRATION
ANS DE GARANTIE UPON REGISTRATION
XPONIA ERRYHEH UPON REGISTRATION
ANOS GARANTIA UPON REGISTRATION
JAAR GARANTIE UPON REGISTRATION
ANOS GARNTIA UPON REGISTRATION

The DEWALT 3 year guarantee is an extension of the standard 1 year warranty and offers security in case of manufacturing and material defects to DEWALT tools. To be eligible for the extended warranty you must register online within 4 weeks of purchase. Visit Finland MyDEWALT.DEWALT.fi/3/; Denmark MyDEWALT.DEWALT.dk/3/; Norway MyDEWALT.DEWALT.no/3/; Sweden MyDEWALT.DEWALT.se/3/ for a full list of products eligible for the extended warranty and to register your tool today.

HOW DOES IT WORK?

- 1.** Log in to MyDEWALT at
Finland MyDEWALT.DEWALT.fi/3/
Denmark MyDEWALT.DEWALT.dk/3/
Norway MyDEWALT.DEWALT.no/3/
Sweden MyDEWALT.DEWALT.se/3/
Create an account if you do not already have an existing one.
- 2.** Register your product by entering the Product Model Number found on the rating label on the tool itself, and select an option from the drop-down list. For kits or product bundles, each individual item must be registered separately.
- 3.** Enter the Date Code (which is engraved inside the battery holder or on the underside of the product), followed by the Serial Number (which can be found on the tool's rating label). Finally enter your Reference (SKU) and the purchase location and date, and click 'Confirm'.
- 4.** A summary page will appear, showing that your tool has been successfully registered on the MyDEWALT website. If the extended warranty is available, this will be indicated in green and you will be able to download your Warranty certificate.
- 5.** If you ever need to claim on your extended warranty, you will be required to show your proof of purchase and printed Warranty certificate to your authorised DEWALT dealer prior to repair.



ONLINE SERVICES

www.2helpU.com

- AFTER SALES SOLUTIONS**
- LOCATE A SERVICE AGENT**
- INSTRUCTION MANUALS**
- TECHNICAL SUPPORT**
- SPARE PARTS**



Visit our DEWALT service site for information on After Sales Services, including:

- Your nearest Authorized Repair Agent
- Frequently Asked Questions
- Technical Drawings
- Our Warranty Policy





NATIONAL SERVICE CENTRE



At our DEWALT National Service Centre, we repair in excess of 20,000 products per year, and with over 150 years of DEWALT repair experience between our professional team of technicians, we are committed to our promise of 5-star service of quality, convenience and speed.



QUALITY

Our professional team of technicians are aided by state of the art testing equipment, allowing for an accurate and quality repair. This enables us to consistently maintain a high standard. All work is also backed by our best in class 6 month repair warranty.



CONVENIENCE

We offer a collection and delivery service to make the repair process of your DEWALT tool as smooth and seamless as possible for you. Our fantastic Customer Service team will help you through the process, giving you peace of mind that your tool is in safe hands.



SPEED

Having your tools back in action in the fastest time possible is our prime objective. Subject to parts availability, most repairs should not take more than 72 hours. For those smaller, urgent repairs we also provide an additional "while-u-wait" service.



GENUINE PARTS

Every part used in our repairs are genuine DEWALT spares, ensuring both the highest quality and a perfect fit every time. All of our genuine parts have the correct specification, and meet industry standards and regulations, guaranteeing optimum performance.



ONLINE SERVICES

Our Service website www.2helpU.com provides an additional wealth of information, easily accessible 24/7. Features includes FAQs, spare part details, technical information, our warranty policy and guides on recycling used tools.



FOR AFTER SALES SERVICE AND TO LOCATE YOUR NEAREST AUTHORISED SERVICE AGENT PLEASE VISIT:

www.2helpU.com

1-70-321	105	DCB115	42	DCE560D1	33	DCH275P2	23
1-70-322	105	DCB118	13	DCE560N	33	DCH283	62
1-70-323	106	DCB119	42	DCE571D1	33	DCH283NT	24
1-70-324	108	DCB127	46	DCE5801	33	DCH283P2	24
1-70-349	106	DCB132	13	DCE581D1	33	DCH323NT	8
1-70-362	108	DCB181	41	DCE581N	33	DCH323T2	8
1-79-208	113	DCB182	41	DCF610D2	45	DCH333	62
1-79-209	113	DCB183	41	DCF6201	22	DCH333NT	8
1-79-211	113	DCB183B	16	DCF620D2	22	DCH333X2	8
D21160	94	DCB184	41	DCF620D2K	22	DCH334	62
D21441	94	DCB184B	16	DCF620N	22	DCH334X2	8
D21510	94	DCB500	11	DCF620NT	22	DCH335X2	8
D21520	94	DCB546	12	DCF620P2K	22	DCH481N	9
D21721K	96	DCB547	13	DCF622N	23	DCH481X2	9
D21805KS	96	DCC1054N	12	DCF622NT	23	DCH733N	14
D23700	75	DCC1054T2	12	DCF622P2	23	DCH733X2	14
D24000S	92	DCD200D1	34	DCF813D2	45	DCK374D1RND	48
D25032K	56	DCD200N	34	DCF815D2	44	DCK379D1GND	49
D25033K	56	DCD240N	12	DCF880M2	21	DCL040	39
D25133K	56	DCD240X2	12	DCF880N	21	DCL043	39
D25134K	56	DCD460N	11	DCF880NT	21	DCL050	40
D25144K	56	DCD460NT	11	DCF887D2	20	DCL060	40
D25301D	62	DCD460T2	11	DCF887N	20	DCL079	40
D25303DH	23, 62	DCD710C2	44	DCF887NT	20	DCL510N	46
D25304DH	57, 62	DCD710D2	44	DCF887P2	20	DCM561P1	34
D25304DH	8	DCD716C2	44	DCF888D2B	19	DCM561P1S	34
D25333	62	DCD716D2	44	DCF888N	19	DCM561PB	34
D25333K	57	DCD740C1	23	DCF888NT	19	DCM561PBS	34
D25334	62	DCD740N	23	DCF888P2B	19	DCM562P1	35
D25334K	57	DCD740NT	23	DCF894N	22	DCM562PB	35
D25335K	57	DCD777M2T	21	DCF894NT	22	DCM563P1	35
D25413K	57	DCD777S2T	21	DCF894P2	22	DCM563PB	35
D25414KT	57	DCD778S2T	21	DCF899HN	22	DCM565N	35
D25430K	57	DCD791D2	19	DCF899HP2	22	DCM565P1	35
D25481K	58	DCD791NT	19	DCF899N	22	DCM5713N	10
D25501K	58	DCD791P2	19	DCF899NT	22	DCM5713X1	10
D25601K	58	DCD792D2B	17	DCF899P2	22	DCM571N	10
D25604K	59	DCD792NT	17	DCG405FN	25	DCM571X1	10
D25733K	59	DCD792P2B	17	DCG405N	25	DCM572N	10
D25773K	59	DCD796D2	19	DCG405NT	25	DCM572X1	10
D25810K	60	DCD796NT	19	DCG405P2	25	DCM575N	11
D25831K	60	DCD796P2	19	DCG406NT	25	DCM575X1	11
D25872K	60	DCD797D2B	17	DCG412M2	25	DCMW564N	36
D25902K	61	DCD797NT	17	DCG412N	25	DCMW564P2	36
D25951K	61	DCD797P2B	17	DCG412NT	25	DCN650N	28
D25960K	61	DCD991NT	20	DCG414N	9	DCN650P2	28
D25981	62	DCD991P2	20	DCG414NT	9	DCN660D2	27
D259811	62	DCD992NT	17	DCG414T2	9	DCN660N	27
D25981K	62	DCD992P2B	17	DCG426N	31	DCN660NT	27
D26200	80	DCD996NT	20	DCG426P2	31	DCN660P2	27
D26204K	80	DCD996P2	20	DCGG571M1	33	DCN680D2	27
D26410	83	DCD997NT	18	DCH133M1	24	DCN680N	27
D26411	84	DCD997P2B	18	DCH133N	24	DCN680NT	27
D26414	84	DCE040	18	DCH133NT	24	DCN681D2	27
D26420	83	DCE041K10	18	DCH253M2	24	DCN681N	27
D26422	83	DCE041K4	18	DCH253N	24	DCN682D2	28
D26500K	79	DCE074D1R	48	DCH253NT	24	DCN682N	28
D27107	67	DCE079D1G	48	DCH254M2	24	DCN6901	26
D27107XPS	67	DCE0825D1G	50	DCH273	62	DCN692N	26
D27111	67	DCE085	51	DCH273N	23	DCN692P2	26
D27112	68	DCE088D1G	49	DCH273NT	23	DCN693N	26
D27113	68	DCE088NR	49	DCH273P2T	23	DCN693P2	26
D27300	70	DCE089D1G	49	DCH274	62	DCN890	26
D28715	91	DCE089NR	49	DCH274N	23	DCN8901-XJ	26
DC5404	33	DCE531N	34	DCH274P2	23	DCN8902-XJ	26
DCB090	42	DCE5601	33	DCH274P2T	23	DCN8903-XJ	26

DCN8904-XJ	26	DCS778N	7	DNBT1825SZ	127	DNP172875Z	118
DCN8905-XJ	26	DCS778T2	7	DNBT1830GZ	126, 127	DNP1728B50HDZ	118
DCN890N	25	DCT410D1	46	DNBT1830SZ	127	DNP1728B60HDZ	118
DCN890P2	25	DCT410N	46	DNBT1835GZ	126, 127	DNP1728B75HDZ	118
DCP580N	31	DCT414N	46	DNBT1835SZ	127	DNP1728R50HDZ	118
DCP580NT	31	DCV100	36	DNBT1838GZ	126, 127	DNP1728R60HDZ	118
DCP580P2	31	DCV517N	37	DNBT1840GZ	126, 127	DNP1728R75HDZ	118
DCR002	38	DCV584L	36	DNBT1840SZ	127	DNP173190HDZ	118
DCR017	37	DE0714G	53	DNBT1845GZ	126, 127	DNP173190Z	118
DCR019	37	DE0730	53	DNBT1845SZ	127	DNP1731B90HDZ	118
DCR020	37	DE0730G	53	DNBT1850GZ	126, 127	DNP1731R90HDZ	118
DCR027	38	DE0735	53	DNBT1850SZ	127	DNP212850HDZ	118
DCS310D2	45	DE0736	53	DNF23R64E	122	DNP212860HDZ	118
DCS310N	45	DE0737	54	DNF2560E	121	DNP212860Z	118
DCS331M2	30	DE0772	51	DNF2564E	121	DNP212875HDZ	118
DCS331N	30	DE0881	53	DNF2570E	121	DNP212875Z	118
DCS331NT	30	DE0882	54	DNF25R40HDZ	121	DNP2128B50HDZ	118
DCS350N	32	DE0892	50	DNF25R45HDZ	121	DNP2128B60HDZ	118
DCS350NT	32	DE0892G	51	DNF25R50E	121	DNP2128B75HDZ	118
DCS355D2	32	DE3472	66	DNF25R50S316E	121	DNP2128R50HDZ	118
DCS355M2	32	DE3473	66	DNF25R55S316E	121	DNP2128R60HDZ	118
DCS355N	32	DE3474	66	DNF25R60E	121	DNP2128R75HDZ	118
DCS355NT	32	DE3491	66	DNF25R70E	121	DNP213190HDZ	118
DCS365M2	28	DE3494	66	DNF25R70S316E	121	DNP213190Z	118
DCS365N	28	DE3495	66	DNF28B50HDZ	121	DNP2131B90HDZ	118
DCS367N	30	DE3496	66	DNF28B63HDZ	121	DNP2131R90HDZ	118
DCS367NT	30	DE6292	76	DNF28B75HDZ	121	DNPT2863G12Z	117
DCS367P2	30	DE7023	66	DNF28R50HDZ	121	DNPT2863Z	117
DCS371N	31	DE7024	66	DNF28R55E	121	DNPT28B50HDZ	117
DCS371NT	31	DE7025	66	DNF28R55G12E	121	DNPT28B63HDZ	117
DCS373N	29	DE7027	66	DNF28R60E	121	DNPT28B75HDZ	117
DCS373NT	29	DE7028	66	DNF28R63HDZ	121	DNPT28R50G12Z	117
DCS380M2	30	DE7029	66	DNF28R65E	121	DNPT28R50HDZ	117
DCS380N	30	DE7030	66	DNF28R75HDZ	121	DNPT28R50Z	117
DCS388N	7	DE7031	66	DNF28R90E	121	DNPT28R63G12Z	117
DCS388T2	7	DE7033	66	DNF31B90HDZ	121	DNPT28R63HDZ	117
DCS391M2	29	DE7035	66	DNF31R70S316E	121	DNPT28R63SZ	117
DCS391N	29	DE7260	66	DNF31R80E	121	DNPT28R63Z	117
DCS391NT	29	DE7400	69	DNF31R90HDZ	121	DNPT28R75G12Z	117
DCS396N	9	DE7450	69	DNF31R90S316E	121	DNPT28R75Z	117
DCS396T2	9	DHS780N	11	DNM40R40GZ	119	DNPT3190G12Z	117
DCS397N	9	DHS780T2A	11	DNM40R40HDZ	119	DNPT3190Z	117
DCS397T2	9	DNBDA1532GZ	124	DNM40R50GZ	119	DNPT31B90HDZ	117
DCS491N	33	DNBDA1538GZ	124	DNM40R50HDZ	119	DNPT31R100HDZ	117
DCS491NT	33	DNBDA1538SZ	124	DNM40R60GZ	119	DNPT31R75HDZ	117
DCS520NT	6	DNBDA1545GZ	124	DNM40R60HDZ	119	DNPT31R90G12Z	117
DCS520T2	6	DNBDA1550GZ	124	DNN20B35HDZ	122	DNPT31R90HDZ	117
DCS520T2R	6	DNBDA1550SZ	124	DNN20B40HDZ	122	DNPT31R90Z	117
DCS551N	32	DNBDA1564GZ	124	DNN20B45HDZ	122	DNPT028B50HDZ	117
DCS570N	29	DNBSB1618S316Z	125	DNN20B50HDZ	122	DNPT028B63HDZ	117
DCS570NT	29	DNBSB1622S316Z	125	DNN20R35G12E	122	DNPT028B75HDZ	117
DCS570P2	29	DNBSB1625S316Z	125	DNN20R35HDZ	122	DNPT028R50HDZ	117
DCS575N	6	DNBSB1625Z	125	DNN20R38G12E	122	DNPT028R63HDZ	117
DCS575NT	6	DNBSB1632S316Z	125	DNN20R40HDZ	122	DNPT028R75HDZ	117
DCS575T2	6	DNBSB1632Z	125	DNN20R45G12E	122	DNPT028R75S316Z	117
DCS576N	6	DNBSB1638S316Z	125	DNN20R45HDZ	122	DNPT031B90HDZ	117
DCS576NT	6	DNBSB1638Z	125	DNN20R50G12E	122	DNPT031R100HDZ	117
DCS576T2	6	DNBSB1645Z	125	DNN20R50HDZ	122	DNPT031R90HDZ	117
DCS577N	14	DNBSB1650S316Z	125	DNN20R55G12E	122	DNPT031R90S316Z	117
DCS577T2	14	DNBSB1650Z	125	DNN23B63HDZ	122	DNR3119GZ	123
DCS690N	14	DNBSB1657Z	125	DNN23R55S316E	122	DNR3119HDZ	123
DCS690X2	14	DNBSB1664Z	125	DNN23R63HDZ	122	DNR3122GZ	123
DCS7485N	8	DNBT1815GZ	127	DNP172850HDZ	118	DNR3122HDZ	123
DCS7485T2	8	DNBT1820GZ	126	DNP172860Z	118	DNR3132GZ	123
DCS777N	7	DNBT1820SZ	127	DNP172860Z	118	DNR3132HDZ	123
DCS777T2	7	DNBT1825GZ	126, 127	DNP172875HDZ	118	DNR3138HDZ	123

DNR3145HDZ	123	DPS8016-XJ	131	DWD024S	97	DWS5032	76
DNW2850E	117	DPSB2IN1	133	DWD112S	95	DWS520KT	76
DNW2863E	117	DPSB2IN1-XJ	127	DWD221	95	DWS520KTR	76
DNW2870E	117	DPSSL540	133	DWD522KS	97	DWS773	64
DNW2880E	117	DPSSL540-XJ	130	DWD524KS	97	DWS774	64
DNW2890E	117	DPSSX38	133	DWD530KS	98	DWS777	64
DNW28R50E	117	DPSSX38-XJ	129	DWE1622K	96	DWS778	65
DNW28R50G12E	117	DST50025GZ	130	DWE305PK	78	DWS780	66
DNW28R63E	117	DST50030GZ	130	DWE315	74	DWST1-70702	110
DNW28R63G12E	117	DST50035GZ	130	DWE315KT	74	DWST1-70703	108
DNW28R70E	117	DST50040GZ	130	DWE357K	78	DWST1-70704	108
DNW28R75E	117	DST8006Z	131	DWE397	79	DWST1-70705	109
DNW28R75G12E	117	DST8008Z	131	DWE398	79	DWST1-70706	109
DNW28R80E	117	DST8010Z	131	DWE399	79	DWST1-71194	109
DNW28R90E	117	DST8012Z	131	DWE4057	86	DWST1-71195	110
DNW3180E	117	DST8014Z	131	DWE4057	86	DWST1-71196	112
DNW3190E	117	DST8016Z	131	DWE4157	86	DWST1-71228	110
DNW3190G12E	117	DSTSX12Z	127, 129	DWE4203	86	DWST1-71229	111
DNW31R70E	117	DSTSX15Z	127, 129	DWE4207	86	DWST1-72364	112
DNW31R75E	117	DSTSX18SE	127, 129	DWE4207	86	DWST1-75522	104
DNW31R80E	117	DSTSX19Z	127, 129	DWE4207K	86	DWST1-75551	113
DNW31R90E	117	DSTSX22Z	127, 129	DWE4217	86	DWST1-75552	113
DNW31R90G12E	117	DSTSX25SE	127, 129	DWE4227	87	DWST1-75650	114
DPC10QTC	133	DSTSX25Z	127, 129	DWE4233	87	DWST1-75651	114
DPC10QTC-QS	132	DSTSX28SE	127, 129	DWE4237	87	DWST1-75652	114
DPC10RC	133	DSTSX30SE	127, 129	DWE4237K	87	DWST1-75653	114
DPC10RC-QS	132	DSTSX30Z	127, 129	DWE4238	87	DWST1-75654	105
DPC16PS	133	DSTSX35SE	127, 129	DWE4257	88	DWST1-75659	104
DPC16PS-QS	132	DSTSX35Z	127, 129	DWE4557	89	DWST1-75659	38
DPC6MRC	133	DW03050	52	DWE4559	90	DWST1-75661	114
DPC6MRC-QS	132	DW03101	52	DWE4579	90	DWST1-75662	114
DPN10033	133	DW033	52	DWE4599	90	DWST1-75663	104
DPN10033-XJ	116	DW088CG	50	DWE46105	88	DWST1-75668	106
DPN1564A	133	DW088K	50	DWE46150	88	DWST1-75694	107, 108
DPN1564APP	133	DW088KD	50	DWE4884	90	DWST1-75774	111
DPN1564APP-XJ	124	DW099S	52	DWE490	89	DWST1-75799	111
DPN1564A-XJ	124	DW217	94	DWE492	89	DWST1-79210	113
DPN1664	133	DW221	95	DWE492	89	DWST1-80123	107
DPN1664PP	133	DW275KN	98	DWE492S	89	DWST1-81042	112
DPN1664PP-XJ	125	DW292	98	DWE494	89	DWST1-81045	112
DPN1664-XJ	125	DW311K	78	DWE550	74	DWST1-81055	107
DPN1850	133	DW331KT	77	DWE560	74	DWST1-81078	39
DPN1850PP	133	DW333KT	77	DWE560K	74	DWST1-81079	104, 110
DPN1850PP-XJ	126	DW343K	77	DWE575K	75	DWST1-81333	107
DPN1850-XJ	126	DW621	81	DWE576K	75	DWST1-81690	112
DPN2330	133	DW621K	81	DWE6005	80	DWST7-97150	108
DPN2330-XJ	128	DW621KT	81	DWE6411	82	DWV9000	101
DPN250MCN	133	DW622KT	81	DWE6423	82	DWV901L	100
DPN250MCN-XJ	119	DW625EKT	81	DWE7491	69	DWV901LT	100
DPN46RN	133	DW680	79	DWE74911	69	DWV902L	100
DPN46RN-XJ	123	DW682K	82	DWE74912	69	DWV902M	100
DPN64C	133	DW711	68	DWH050	101	DWV9110	101
DPN64C-XJ	122	DW712N	65	DWH051	102	DWV9120	101
DPN75C	133	DW717XPS	65	DWH052K	102	DWV9130	101
DPN75C-XJ	120	DW721KN	71	DW096PK	54	DWV9150	101
DPN9017PL	133	DW729KN	71	DWP352VS	84	DWV9210	101
DPN9017PL-XJ	118	DW733	70	DWP849X	91	DWV9220	101
DPN9021PL	133	DW738	71	DWP-CPACK30	132	DWV9315	101
DPN9021PL-XJ	118	DW743N	67	DWS5021	76	DWV9316	101
DPN9033	133	DW745	69	DWS5022	76	DWV9340	100
DPN9033SM	133	DW753	92	DWS5023	76	DWV9350	101
DPN9033SM-XJ	116	DW872	91	DWS5025	76	DWV9390	31
DPN9033-XJ	116	DW876	70	DWS5026	76	DWV9400	100
DPN90C	133	DWC410	92	DWS5029	76	DWV9401	100
DPN90C-XJ	120	DWD014S	95	DWS5030	76	DWV9402	100
DPS8016	133	DWD024KS	97	DWS5031	76	DWV9500	100



DEWALT Denmark
Roskildevej 22
2620 Albertslund
E-mail: kundeservice.dk@sbdinc.com

DEWALT Finland
Elimäenkatu 28 4 krs
00520 HELSINKI
Sähköposti: asiakaspalvelu.fi@sbdinc.com

DEWALT Norway
Postboks 4613 Nydalen
0405 Oslo
E-mail: kundeservice.no@sbdinc.com

DEWALT Sweden
Box 94,
431 22 Mölndal
E-mail: kundservice.se@sbdinc.com

All rights reserved. Neither this catalogue nor its text, illustrations, drawings or any part thereof, may be reproduced, stored in a retrieval system, photocopied, recorded or transmitted in any form, whether electronic or otherwise, without our consent.

To the best of our knowledge, all descriptions and illustrations contained in this catalogue are correct at the time of going to print. We cannot, however, be held liable for any inaccuracies of description or illustration and reserve the right to change specifications without notification.

© DEWALT® 2018.

