



		<b>KSE 55 Vario Plus</b> <b>KSE 55 Vario Plus</b> <b>PartnerEdition</b>
P <sub>1</sub>	W	1200
P <sub>2</sub>	W	700
n <sub>0</sub>	min <sup>-1</sup> (rpm)	2000 - 5200
n <sub>1</sub>	min <sup>-1</sup> (rpm)	5000
T <sub>90°</sub>	mm (in)	0 - 55 (0 - 2 <sup>5</sup> / <sub>32</sub> )
T <sub>45°</sub>	mm (in)	0 - 40 (0 - 1 <sup>9</sup> / <sub>16</sub> )
A	°	90° - 45°
D	mm (in)	160 (6 <sup>5</sup> / <sub>16</sub> )
d	mm (in)	20 ( <sup>25</sup> / <sub>32</sub> )
a	mm (in)	1,4 (0.055)
b	mm (in)	2,2 (0.087)
m	kg (lbs)	3,4 (7.5)
a <sub>h,D</sub> /K <sub>h,D</sub>	m/s <sup>2</sup>	2,5 / 1,5
L <sub>pA</sub> /K <sub>pA</sub>	dB (A)	94 / 3
L <sub>WA</sub> /K <sub>WA</sub>	dB (A)	105 / 3

	min <sup>-1</sup> (rpm)
1	2000
2	2500
3	3300
4	4000
5	4600
6	5200

6	
6	
3-6	
4-6	
4-6	
4-6	
3-6	

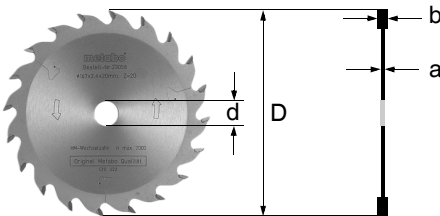

**CE** EN 60745  
2006/42/EG, 2004/108/EG, 2011/65/EU

ppac  2012-05-29  
Volker Siegle

Director Product Engineering & Quality  
Responsible Person for Documentation  
Metabowerke GmbH, 72622 Nuertingen, Germany