Satisfy Professional's Needs

XGT

Makita® Cordless Recipro Saw JR003G

XGT 40V max Li-ion

Easy and secure fixing with chain vise



Capable of cutting large-diameter pipes





XGT 40Vmax Li-ion

Highly durable construction for heavy-duty tasks




BL MOTOR +

Constant speed control
Maintains motor speed during heavy-duty cutting

Cutting speed* (approx)	Work amount* (approx)
28 sec.	**21 pcs.** With BL4040 battery

*Cutting a steel pipe with an outer diameter of 114 mm

Capable of cutting thick materials

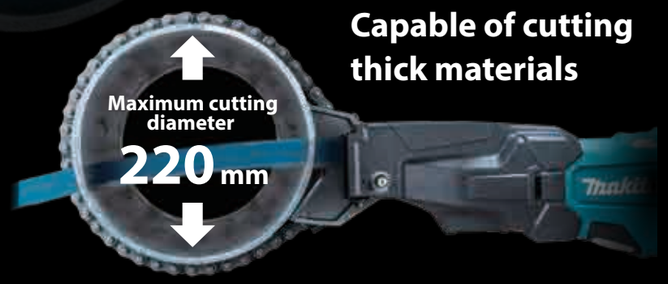



Quick and easy fixing
The spring built into the vise allows quick and secure fixing.



Temporary holding
The spring built into the vise allows the chain to be temporarily held in place while wrapped around the pipe.

Usable without the chain vise


The tool can be used as a standard recipro saw without the chain vise by attaching the front grip supplied as a standard accessory.



Blade clamp S set
(Optional accessory)
For installing a thin recipro saw blade

Easy blade clamp maintenance

The blade clamp, which requires frequent replacement under heavy-duty conditions, can be easily replaced simply by loosening the hex socket bolts without removing the shoe.

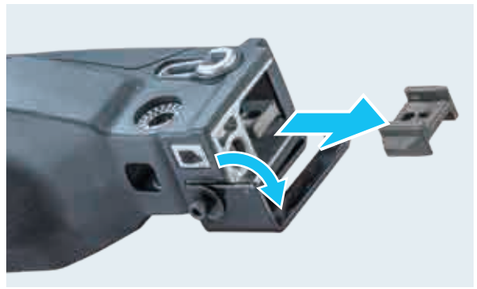

Adjustable stroke rate based on material



Material	Number on dial	Strokes per minute
Cast iron pipes	5	0 - 2,200
Iron pipes	4	0 - 1,850
	3	0 - 1,500
	2	0 - 1,150
Stainless steel pipes	1	0 - 800



High water-resistance

XPT


Speed adjusting dial



XGT 40V max Li-ion

Accessories

Max. cutting diameter

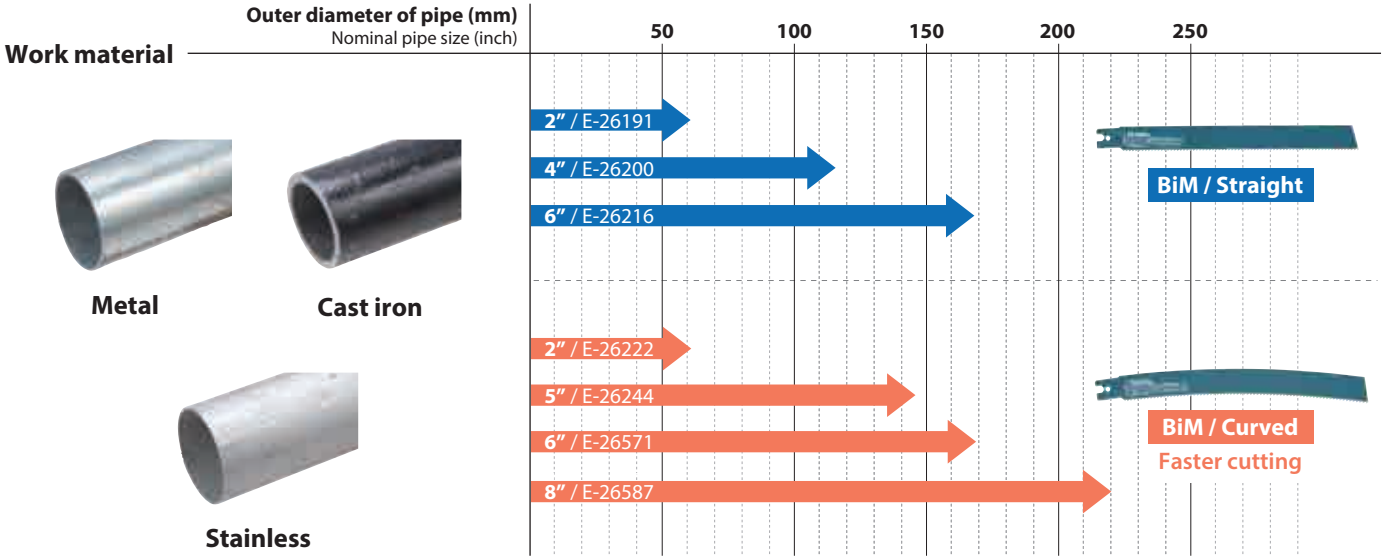

Chain vise recipro saw blade, cast iron pipes



Work material	Type of cut	Tooth type	Max cutting diameter mm	Nominal pipe size	TPI	Overall length mm	Working length mm	Thickness mm	Item material	Note	Sales pkg q'ty	Part No.
Metal, Cast iron, Stainless	Heavy	Milled and side set teeth	61	2"	8	145	117	1.6	Bi-Metal	For chain vise recipro saw	5	E-26191
			118	4"		200	172				5	E-26200
			169	6"		260	232				5	E-26216

Chain vise recipro saw blade, cast iron pipes curved shape



Work material	Type of cut	Tooth type	Max cutting diameter mm	Nominal pipe size	TPI	Overall length mm	Working length mm	Thickness mm	Item material	Note	Sales pkg q'ty	Part No.
Metal, Cast iron, Stainless	Heavy	Milled and side set teeth	61	2"	8	145	117	1.6	Bi-Metal	For chain vise recipro saw	5	E-26222
			145	5"		260	232				5	E-26244
			169	6"		300	272				5	E-26571
			220	8"		350	322				5	E-26587

Blade clamp S set

A part for fixing thin recipro saw blades

Part No. 1916C6-7



Charging Time

	Fast Charging DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Recipro Saw JR003G

- Variable Speed
- Brake
- Anti-restart function
- Constant Speed
- Soft Start
- Carrying Case

Max cutting diameter	ø220 mm (8-5/8")
Stroke length	26 mm (1")
Strokes per minute	0 - 2,200 min^{-1}
Speed adjustment	800 - 2,200
Vibration level	14.9 m/s^2 (EN62841-2-11, Mode: Cutting boards), 15.3 m/s^2 (EN62841-2-11, Mode: Cutting wooden beams)
Uncertainty (K) for Vibration	1.6 m/s^2 (EN62841-2-11, Mode: Cutting boards), 1.8 m/s^2 (EN62841-2-11, Mode: Cutting wooden beams)
Sound pressure level	82 dB (A) (EN62841-2-11)
Sound power level	90 dB (A) (EN62841-2-11)
Uncertainty (K) for Noise	3 dB (EN62841-2-11)
Dimensions (L x W x H)	583 x 103 x 152 mm (23 x 4-1/16 x 6")
(Battery)	BL4040
Net weight	4.5 - 6.8 kg (9.9 - 15.0 lbs.)
(Battery)	BL4020 - BL4080F

Standard Equipment :
Hex wrench, Hex socket head bolt, Recipro saw blade set for use with chain vise, Vise assembly, Front grip, Grip shaft, Battery, Charger, Blade

The net weight value includes the lightest and heaviest combination of the attachment(s) and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation
3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202508

www.makita.com