

Environmental Product Declaration

In accordance with ISO 14025 and EN 15804+A2:2019 for:

LIP Grouts

from LIP Bygningsartikler A/S



Programme: The International EPD® System, www.environdec.com
Programme operator: EPD International AB
EPD registration number: S-P-04249 available from EPD International
Publication date: 2021-11-02 (version 1)
Revision date: 2023-02-03 (version 2)
Valid until: 2026-10-28 (version 1, 2)

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com

General information

Owner of the declaration and manufacturer:

LIP Bygningsartikler A/S · Industrivej 16 · DK-5580 Nørre Aaby · Phone: +45 6442 1330 · Fax: +45 6442 3408

Declaration issued: 2021-11-02

EPD Prepared by: Bureau Veritas HSE, Denmark

Standards: ISO 14025 and EN 15804+A2:2019. EPD's of other construction products may not be comparable if they do not comply with this standard.

Statement: This report records that the LCA based information and the additional information declared in the EPD meets the requirements of the European Standard EN 15804:2010+A2:2019 and PCR 2019:14 v 1.11.

Scope: This LCA study is intended to be used in a cradle to grave with module D EPD covering the following grouts in table 1, all produced by LIP Bygningsartikler A/S at the same production site. The EPD will be accessible on <http://www.lip.dk/> together with safety data sheets and product information, providing information for business-to-business communication. The Geographical scope is Europe.

About LIP Bygningsartikler A/S

LIP Bygningsartikler A/S is a Danish Company, which since its founding in 1967 has produced high quality products at competitive prices.

The product range from the beginning was tile adhesive and sealants, which since then has been expanded with products within flooring putty, waterproofing, silicone, epoxy, filler compounds, etc.

All our products are continuously under internal as well as external quality control, so that we can always live up to our slogan:

LIP - when building on quality!

Product information

Products represented

LIP Multi Grout Manhattan, LIP Multi Grout Grey, LIP Multi Grout Antracite, LIP Multi Grout Jasmin, LIP Multi Grout Pearl, LIP Multi Grout Sand, LIP Multi Grout White, LIP Multi Grout Black.



Figure 1: Picture of the eight LIP products covered in this project report.

Product description

These products are manufactured by LIP Bygningsartikler A/S in the production plants located in Nørre Aaby, Denmark. These products are used for fixing and laying wall and floor tiles, marble, facing bricks, glass wool batts, Rockwool batts, polystyrene veneers, etc.

The manufacturing process starts from raw materials purchased from suppliers and stored in the plant. Bulk raw materials are stored in specific silos and added mostly automatically in the production mixer, according to the formula of the product. Other raw materials, supplied in bags or big bags, are stored in the warehouse and added automatically or manually in the mixer. The production is a discontinuous process, in which all the components are mechanically mixed in batches.

The semi-finished product is then packaged in bags, put on wooden pallets, covered by stretched hoods and stored in the Finished Products' warehouse. The quality of final products is controlled before the sale.

The product is supplied from production in dry form, premixed in respect of all contents but water. Water is added at the building site in the construction/ installation stage, in a defined amount and technique, in order to produce a deformable cementitious adhesive of high performance. The product is under UN CPC 3733 - Refractory cements, mortars, concretes and similar compositions n.e.c.

Table 1: Product information for the eight products covered by this EPD.

| Product name | | Article no. | Description |
|-------------------------|---------------------------|-------------|---|
| Danish | English | | |
| LIP Multifuge Manhattan | LIP Multi Grout Manhattan | 230000 | 5 and 20 kg bags cement based 0.2L water per kg |
| LIP Multifuge Grå | LIP Multi Grout Grey | 230017 | 5 and 20 kg bags Grey cement based 0.2L water per kg |
| LIP Multifuge Koksgrå | LIP Multi Grout Antracite | 230024 | 5 and 20 kg bags Antracite cement based 0.2L water per kg |
| LIP Multifuge Jasmin | LIP Multi Grout Jasmin | 51063 | 5 kg bags |

| | | | |
|------------------------|-----------------------|--------|---|
| | | | Cement based 0.2L water per kg |
| LIP Multifuge Perlehid | LIP Multi Grout Pearl | 230048 | 5 and 20 kg bags White cement based 0.2L water per kg |
| LIP Multifuge Sand | LIP Multi Grout Sand | 230031 | 5 and 20 kg bags Cement based 0.2L water per kg |
| LIP Multifuge Hvid | LIP Multi Grout White | 51124 | 5 kg bags White cement based 0.2L water per kg |
| LIP Multifuge Sort | LIP Multi Grout Black | 51117 | 5 kg bags Black cement based 0.2L water per kg |

Declared Unit

The declared unit (DU) is 1 kg of dry-packed finished product. This EPD describes the environmental impact of 1 kg of dry-packed grout. The product consumption, of course, depends on the size of the tile, unevenness, grout size and the size of the toothpick.

Reference service life

According to LIP Bygningsartikler A/S experience, the Reference Service Life (RSL) of premade mortars is not applicable, as B1-B7 modules are not declared and not assessed. The product does not need maintenance or replacement during its service life, if professionally used and properly installed.

Technical data

The products are designed, produced and CE marked according to DS/EN 13888 (grouts for ceramic tiles - Requirements, conformity assessment, classification and designations). They are classified as seen in table 2 according to DS/EN 13888 (grouts for ceramic tiles - Requirements, conformity assessment, classification and designations).

Table 2: Performance information for the eight products according to DS/EN 13888.

| | LIP Multi Grout Manhattan | LIP Multi Grout Grey | LIP Multi Grout Antracite | LIP Multi Grout Jasmin | LIP Multi Grout Pearl | LIP Multi Grout Sand | LIP Multi Grout white | LIP Multi Grout black |
|---|---------------------------|----------------------|---------------------------|------------------------|-----------------------|----------------------|-----------------------|-----------------------|
| Standard | DS/EN 13888 | DS/EN 13888 | DS/EN 13888 | DS/EN 13888 | DS/EN 13888 | DS/EN 13888 | DS/EN 13888 | DS/EN 13888 |
| | CG2WA | CG2WA | CG2WA | CG2WA | CG2WA | CG2WA | CG2WA | CG2WA |
| Bend's tearing strength | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 |
| Bend's tearing strength after freeze-thaw cycles | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 | ≥ 3.5 N/mm2 |
| Crushing strength | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 |
| Crushing strength after freeze-thaw cycles | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 | ≥ 15 N/mm2 |

Air emission

All the eight Grouts covered in this EPD has low dust technology and very low emission of volatile organic compounds and documented with GEV-EMICODE EC 1^{PLUS}. Documentation attached for GEV-EMICODE.



Content declaration

Content declaration including packaging covering the eight LIP Grouts in this EPD.

Table 3: Content declaration, which covers the eight LIP products.

| LIP Grouts | | | | |
|---------------------|---------|--|---|------------------------------|
| Product components | | Weight% | Post-consumer material, weight-% | Renewable material, weight-% |
| Silica sand | | 35 - 60 | 0% | 0% |
| Cement | | 25 - 30 | 0% | 0% |
| Dolomite | | 0 - 30 | 0% | 0% |
| Additives | | 1 - 10 | 0% | 0% |
| Packaging materials | | Weight, kg | Weight-% (versus the product) | |
| Bags | Paper | 0.012 kg (for 5 and 20kg bag) 0.0145 kg for 20kg bag 0.0122 for 15 kg bag 0.003312 for 5 kg bag | 12 % (for 5 and 20kg bag) 14.5 % for 20kg bag 12.2 % for 15 kg bag 3.3% for 5 kg bag | |
| | PE-film | 0.5 g/kg product | 0.05 % | |
| Transport packaging | PE-film | 0.6 g/kg product | 0.06 % | |
| Total: | | | | |

During the life cycle of the product no hazardous substance listed in the “Candidate List of Substances of Very High Concern (SVHC) for authorization” has been used in a percentage higher than 0.1% of the weight of the product.

LCA information

Product category rules (PCR)

PCR 2019:14 Construction products (EN 15804:A2) Version 1.11.

Time representativeness

Data from factory (primary data) is from 2021.

Database(s) and LCA software used

LCA Software: Simapro 9.4

Database: Most processes in the LCA Software have been modelled using the EcolInvent database 3.8. The database was available in SimaPro as local LCI process libraries, allowing for background data integration. Instead of using generic data for the main components including cement, calcium carbonate and polymer powder, the suppliers of those raw materials were contacted and specific EPD for their raw materials were used.

EPDs used as input data along with their EPD related information i.e. EPD program, validity dates, owner, etc. are presented 'Database section' of the LCA project report, in order to preserve confidentiality of the supplier.

The impact models used are the ones included in the Simapro method named EN 15804 +A2 Method V1.00 / EF 3.0 normalization and weighting set.

Cut-off criteria for initial inclusion of inputs and outputs

The general rules for cut-off of inputs and outputs follow the requirements in EN 15804, 6.3.5, where the total of neglected input flows per module shall be a maximum of 5 % of energy usage and mass and 1 % of energy usage and mass for unit processes. Recycling processes and benefits for recycled plastic packaging is regarded as below cut-off criterion of 1%.

Allocation principles and procedures

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. In this study, as per EN 15804, allocation is conducted in the following order.

1. Allocation should be avoided.
2. Allocation should be based on physical properties (e.g. mass, volume) when the difference in revenue is small.
3. Allocation should be based on economic values.

The "Allocation, cut-off by classification" system model that has been chosen subdivides multi-product activities by allocation, based on physical, economic, mass or other properties. By-products of waste treatment processes are cut-off, as are all by-products classified as recyclable. Markets in this model include all activities in proportion to their current production volume.

The production energy used in this LCA study, is derived by the total energy consumption at the location of LIP Bygningsartikler A/S divided by the total production volume of all their products. However, there are no co-products, and therefore no allocation between products beside the energy.

Description of system boundaries

This study covers a cradle-to-gate with options (A1-A5, C1-C4 and D) EPD.

Table 4: Life cycle stages covered by this LCA study.

| Module | Product stage | | | Installation processes | | Use stage | | | | | | | End of life stage | | | | |
|--------|---------------------|-----------|---------------|------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-----------|------------------|----------|------------------------------------|
| | Raw material supply | Transport | Manufacturing | Transport | Construction installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport | Waste processing | Disposal | Reuse-Recovery-Recycling-potential |
| | A1-A3 | | | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |

| | | | | | | | | | | | | | | | | |
|----------------------|---|--|------------|---|----|----|----|----|----|----|----|---|---|---|---|---|
| | Production of commodities, raw materials | Product manufacture | | | | | | | | | | | | | | |
| Modules declared | X | | X | X | ND | ND | ND | ND | ND | ND | ND | X | X | X | X | X |
| Geography | Europe | Denmark | Europe | | | | | | | | | | | | | |
| Process type | Upstream | Processes the manufacture has influence over | Downstream | | | | | | | | | | | | | |
| Data type | >58 % share of specific data in % GWP-GHG | Specific | - | | | | | | | | | | | | | |
| Variation – products | Not relevant | | - | | | | | | | | | | | | | |
| Variation – sites | Manufactured in one site | | - | | | | | | | | | | | | | |

Product stage (A1-A3):

- A1-A2: extraction, supply and transport of raw materials and packaging to LIP Bygningsartikler A/S. Raw materials are purchased from European suppliers.
- A3: manufacturing process of product and its packaging and waste management from the same process. All the electricity comes from wind energy produced at Lindø Port with >3MW onshore wind turbines. Approximately 0.88MJ is used for the production of 1 kg product. A3 covers dosage and mixing of selected and measured raw materials and additives to ensure that the product meets desired properties and packaging material consumption. Packaging product materials consist of the bag material, wooden pallet and LDPE used as wrapping material. A calculation has been already made that the wooden pallet can hold at least 48 bags of product and it was used to calculate how much wrapping foil is needed.

Therefore, presuming 25 use cycles is reasonable for one pallet, in average 1/25 of the manufacturing and waste handling of one pallet should be allocated to at least the 48 bags of product(s) transported in one pallet use cycle or 1/48 for 1 bag of product. Therefore, the waste from the same process is assessed to be negligible, as raw material waste, if any, will be used in subsequent process or directed to incineration.

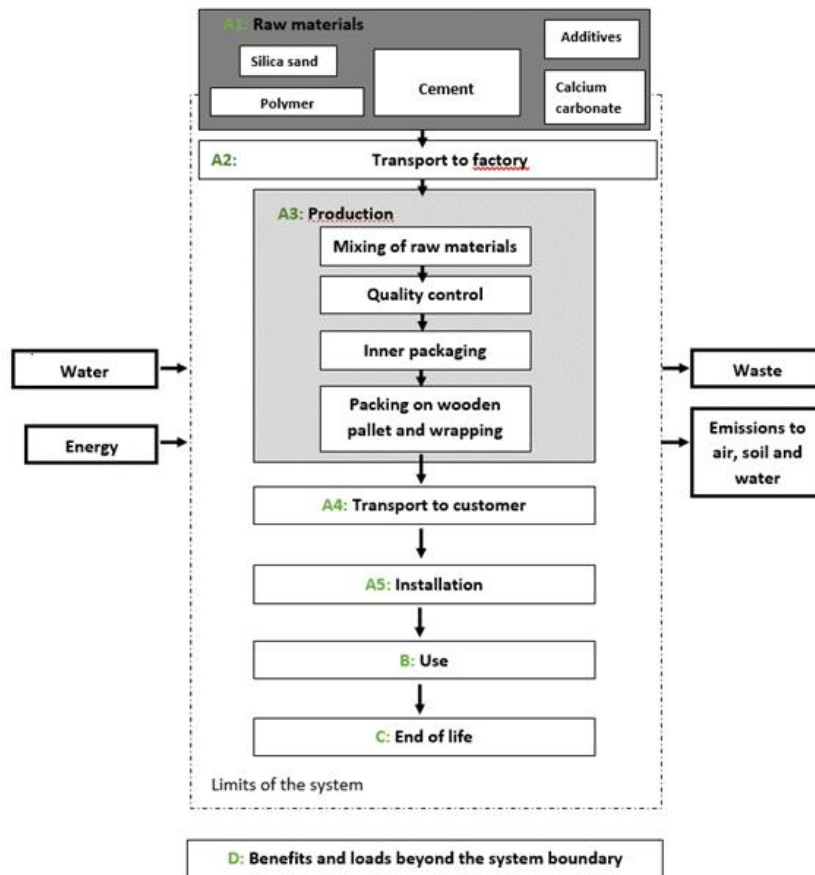


Figure 2: Limits of the system in this study.

Construction process stage (A4-A5):

- A4: distribution to typical Customer by transport of packaged product from production gate to end user (building site). The customers of LIP Bygningsartikler A/S are primarily from Denmark About 92 percent of the products produced by LIP at the production site in Nørre Aaby in Denmark, are sold in Denmark, 4 percent in Sweden, 2 percent in Norway and 1 percent in both Germany and the Netherlands. The distance has in the present LCA study been estimated to be 500km via road transport by a Euro 6 lorry of 32 metric ton.
- A5: installation of product into building, including required water and its blending energy. For installation, water consumption can be found in table 1. Mixing electricity consumption is assumed to be 0.216 MJ/kg. This is equivalent to the use of a 1200-Watt handheld mixer for 3 minutes It is estimated that if the technician has experience and uses the same bucket of tile mortar product to reduce residue, 2-4 % could be expected. This estimate is expressed in the model by 5% loss instead, as a conservative approach. 5% loss has been advised to LIPs customers and LIP offers calculator with losses on LIPs website as a guide when buying products. No industry standard exists and PCR does not provide further guidance for any losses or spillage. The product can be used in 12 months or 18 months. The electricity mix is modelled with European mix and it is considered as an adequate choice, but since more than 90% of the market is in Denmark, Danish residual mix would be a better choice to consider in this study's validity period of 5 years.

Use stage (B1-B7):

- B1 to B7 are not declared (ND) as they are not applicable: the product does not need maintenance or replacement during its service life, if professionally used and properly installed.

End of life stage (C1-C4):

- C1: deconstruction and demolition of the product into the building. Grouts for surface use are typically not considered as part of the structure of the building. However, during the building destruction, the quantity of extra energy required to break these applications can be neglected compared to the energy required to demolish the structure of the building and are therefore not included in this LCA study.
- C2: transport of waste product from demolition to recycling/disposal facility that is waste collection. The distance covered is 50 km via road transport by a Euro 6 lorry of 32 metric ton.
- C3: The product is expected to be disposed as landfill after end of life, so waste processing is negligible.
- C4: Waste disposal in landfill including physical pre-treatment.

D Reuse-Recovery-Recycling potential

Module D calculates the potential environmental benefits of the recycling or reuse of materials. This product has not considerable benefits due to recycling or/and reuse.

Environmental performance

All the environmental impacts have been calculated in SimaPro and with the EN 15804 + A2 Method, which takes all the methods defined by the European Standard EN 15804 + A2 into account.

All the LCIA results are relative expressions and do not predict impacts on category endpoints, the exceeding of thresholds, safety margins or risks.

The disclaimers can be found on 'Programme-related information and verification' section on page 26 of this EPD report.

LIP Multi Grout Manhattan

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 5: Core environmental impact results for the product LIP Multi Grout Manhattan

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,38E-01 | 4,35E-02 | 5,96E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 4,48E-01 | 4,35E-02 | 3,41E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,05E-02 | 3,62E-05 | 2,54E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 3,97E-04 | 1,64E-05 | 5,16E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 3,39E-08 | 1,08E-08 | 1,38E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 2,15E-03 | 1,39E-04 | 1,79E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 4,98E-05 | 2,84E-06 | 1,65E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 3,44E-04 | 3,11E-05 | 3,63E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 3,65E-03 | 3,39E-04 | 2,80E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,51E-03 | 1,34E-04 | 1,01E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 1,82E-06 | 1,04E-07 | 2,09E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 4,59E+00 | 7,08E-01 | 4,72E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,57E+00 | 2,44E-03 | 1,40E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 6: Additional environmental impact results for the product Multi Grout Manhattan

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,39E-01 | 4,32E-02 | 4,29E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 1,87E-08 | 5,05E-09 | 8,47E-10 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 3,39E-08 | 1,08E-08 | 1,38E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 3,65E-03 | 3,39E-04 | 2,80E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 3,14E-09 | 4,70E-10 | 3,22E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 3,97E-04 | 1,64E-05 | 5,16E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 2,09E+00 | 5,53E-01 | 2,83E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 7: Resource use - LIP Multi Grout Manhattan

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,26E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,21E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,08E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ. | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,21E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 2,70E-02 | 2,45E-03 | 1,30E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 8: Waste - LIP Multi Grout Manhattan

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,28E-03 | 0 | 2,14E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,65E-02 | 0 | 4,33E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,69E-05 | 0 | 8,43E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 9: Output flows - LIP Multi Grout Manhattan

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 10: Biogenic Carbon – LIP Multi Grout Manhattan

| | Unit | Quantity |
|---|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO ₂ . | | |

LIP Multi Grout Grey

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 11: Core environmental impact results for the product LIP Multi Grout Grey

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,41E-01 | 4,35E-02 | 5,98E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 4,51E-01 | 4,35E-02 | 3,43E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,05E-02 | 3,62E-05 | 2,54E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 4,03E-04 | 1,64E-05 | 5,19E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 3,49E-08 | 1,08E-08 | 1,43E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 2,17E-03 | 1,39E-04 | 1,80E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 5,12E-05 | 2,84E-06 | 1,66E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 3,48E-04 | 3,11E-05 | 3,65E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 3,69E-03 | 3,39E-04 | 2,82E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,52E-03 | 1,34E-04 | 1,02E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 1,90E-06 | 1,04E-07 | 2,13E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 4,63E+00 | 7,08E-01 | 4,74E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,57E+00 | 2,44E-03 | 1,41E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 12: Additional environmental impact results for the product LIP Multi Grout Grey

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,42E-01 | 4,32E-02 | 4,31E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 1,89E-08 | 5,05E-09 | 8,55E-10 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 3,49E-08 | 1,08E-08 | 1,43E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 3,69E-03 | 3,39E-04 | 2,82E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 3,20E-09 | 4,70E-10 | 3,25E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 4,03E-04 | 1,64E-05 | 5,19E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 2,16E+00 | 5,53E-01 | 2,86E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 13: Resource use - LIP Multi Grout Grey

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,29E-01 | 9,43E-03 | 6,78E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,24E-01 | 9,43E-03 | 6,78E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,12E+00 | 7,52E-01 | 4,16E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ. | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,25E+00 | 7,52E-01 | 4,16E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 2,87E-02 | 2,45E-03 | 1,31E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 14: Waste - LIP Multi Grout Grey

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,29E-03 | 0 | 2,14E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,67E-02 | 0 | 4,33E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,67E-05 | 0 | 8,33E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 15: Output flows - LIP Multi Grout Grey

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 16: Biogenic Carbon - LIP Multi Grout Grey

| | Unit | Quantity |
|---|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO ₂ . | | |

LIP Multi Grout Antracite

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 17: Core environmental impact results for the product LIP Multi Grout Antracite

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,64E-01 | 4,35E-02 | 6,09E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 4,74E-01 | 4,35E-02 | 3,54E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,05E-02 | 3,62E-05 | 2,54E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 4,33E-04 | 1,64E-05 | 5,34E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 3,96E-08 | 1,08E-08 | 1,66E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 2,30E-03 | 1,39E-04 | 1,87E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 5,77E-05 | 2,84E-06 | 1,69E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 3,69E-04 | 3,11E-05 | 3,76E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 3,90E-03 | 3,39E-04 | 2,93E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,59E-03 | 1,34E-04 | 1,06E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 2,24E-06 | 1,04E-07 | 2,30E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 4,87E+00 | 7,08E-01 | 4,86E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,66E+00 | 2,44E-03 | 1,45E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 18: Additional environmental impact results for the product LIP Multi Grout Antracite

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,64E-01 | 4,32E-02 | 4,42E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 1,98E-08 | 5,05E-09 | 9,00E-10 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 3,96E-08 | 1,08E-08 | 1,66E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 3,90E-03 | 3,39E-04 | 2,93E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 3,51E-09 | 4,70E-10 | 3,40E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 4,33E-04 | 1,64E-05 | 5,34E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 2,50E+00 | 5,53E-01 | 3,03E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 19: Resource use - LIP Multi Grout Antracite

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,42E-01 | 9,43E-03 | 6,85E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,37E-01 | 9,43E-03 | 6,85E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,32E+00 | 7,52E-01 | 4,26E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ. | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,45E+00 | 7,52E-01 | 4,26E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 3,62E-02 | 2,45E-03 | 1,35E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 20: Waste - LIP Multi Grout Antracite

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,43E-03 | 0 | 2,21E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,95E-02 | 0 | 4,48E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,50E-05 | 0 | 7,50E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 21: Output flows - LIP Multi Grout Antracite

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 22: Biogenic Carbon - LIP Multi Grout Antracite

| | Unit | Quantity |
|---|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO ₂ . | | |

LIP Multi Grout Jasmin

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 23: Core environmental impact results for the product LIP Multi Grout Jasmin

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,37E-01 | 4,35E-02 | 5,96E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 4,47E-01 | 4,35E-02 | 3,41E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,05E-02 | 3,62E-05 | 2,54E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 3,96E-04 | 1,64E-05 | 5,15E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 3,37E-08 | 1,08E-08 | 1,37E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 2,15E-03 | 1,39E-04 | 1,79E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 4,95E-05 | 2,84E-06 | 1,65E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 3,43E-04 | 3,11E-05 | 3,63E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 3,64E-03 | 3,39E-04 | 2,79E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,51E-03 | 1,34E-04 | 1,01E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 1,81E-06 | 1,04E-07 | 2,08E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 4,58E+00 | 7,08E-01 | 4,72E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,57E+00 | 2,44E-03 | 1,40E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 24: Additional environmental impact results for the product LIP Multi Grout Jasmin

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,38E-01 | 4,32E-02 | 4,29E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 1,87E-08 | 5,05E-09 | 8,46E-10 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 3,37E-08 | 1,08E-08 | 1,37E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 3,64E-03 | 3,39E-04 | 2,79E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 3,13E-09 | 4,70E-10 | 3,21E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 3,96E-04 | 1,64E-05 | 5,15E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 2,08E+00 | 5,53E-01 | 2,82E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 25: Resource use - LIP Multi Grout Jasmin

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,25E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,20E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,08E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,20E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 2,66E-02 | 2,45E-03 | 1,30E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 26: Waste - LIP Multi Grout Jasmin

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,28E-03 | 0 | 2,14E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,66E-02 | 0 | 4,33E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,69E-05 | 0 | 8,44E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 27: Output flows - LIP Multi Grout Jasmin

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 28: Biogenic Carbon - LIP Multi Grout Jasmin

| | Unit | Quantity |
|---|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO ₂ . | | |

LIP Multi Grout Pearl

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 29: Core environmental impact results for the product LIP Multi Grout Pearl

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,37E-01 | 4,35E-02 | 5,96E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 4,47E-01 | 4,35E-02 | 3,41E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,05E-02 | 3,62E-05 | 2,54E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 3,96E-04 | 1,64E-05 | 5,15E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 3,37E-08 | 1,08E-08 | 1,37E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 2,15E-03 | 1,39E-04 | 1,79E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 4,96E-05 | 2,84E-06 | 1,65E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 3,43E-04 | 3,11E-05 | 3,63E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 3,64E-03 | 3,39E-04 | 2,79E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,51E-03 | 1,34E-04 | 1,01E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 1,81E-06 | 1,04E-07 | 2,08E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 4,58E+00 | 7,08E-01 | 4,72E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,57E+00 | 2,44E-03 | 1,40E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 30: Additional environmental impact results for the product LIP Multi Grout Pearl

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,38E-01 | 4,32E-02 | 4,29E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 1,87E-08 | 5,05E-09 | 8,46E-10 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 3,37E-08 | 1,08E-08 | 1,37E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 3,64E-03 | 3,39E-04 | 2,79E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 3,13E-09 | 4,70E-10 | 3,21E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 3,96E-04 | 1,64E-05 | 5,15E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 2,08E+00 | 5,53E-01 | 2,82E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 31: Resource use - LIP Multi Grout Pearl

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,25E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,20E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,08E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,20E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 2,67E-02 | 2,45E-03 | 1,30E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 32: Waste - LIP Multi Grout Pearl

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,28E-03 | 0 | 2,14E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,65E-02 | 0 | 4,33E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,69E-05 | 0 | 8,44E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 33: Output flows - LIP Multi Grout Pearl

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 34: Biogenic Carbon - LIP Multi Grout Pearl

| | Unit | Quantity |
|--|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2. | | |

LIP Multi Grout Sand

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 35: Core environmental impact results for the product LIP Multi Grout Sand

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,37E-01 | 4,35E-02 | 5,96E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 4,48E-01 | 4,35E-02 | 3,41E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,05E-02 | 3,62E-05 | 2,54E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 3,96E-04 | 1,64E-05 | 5,16E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 3,38E-08 | 1,08E-08 | 1,38E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 2,15E-03 | 1,39E-04 | 1,79E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 4,96E-05 | 2,84E-06 | 1,65E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 3,44E-04 | 3,11E-05 | 3,63E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 3,64E-03 | 3,39E-04 | 2,80E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,51E-03 | 1,34E-04 | 1,01E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 1,81E-06 | 1,04E-07 | 2,09E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 4,58E+00 | 7,08E-01 | 4,72E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,57E+00 | 2,44E-03 | 1,40E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 36: Additional environmental impact results for the product LIP Multi Grout Sand

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,38E-01 | 4,32E-02 | 4,29E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 1,87E-08 | 5,05E-09 | 8,46E-10 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 3,38E-08 | 1,08E-08 | 1,38E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 3,64E-03 | 3,39E-04 | 2,80E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 3,14E-09 | 4,70E-10 | 3,21E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 3,96E-04 | 1,64E-05 | 5,16E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 2,08E+00 | 5,53E-01 | 2,82E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 37: Resource use - LIP Multi Grout Sand

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,25E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,20E-01 | 9,43E-03 | 6,76E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,08E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,20E+00 | 7,52E-01 | 4,14E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 2,68E-02 | 2,45E-03 | 1,30E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 38: Waste - LIP Multi Grout Sand

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,28E-03 | 0 | 2,14E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,66E-02 | 0 | 4,33E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,69E-05 | 0 | 8,44E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 39: Output flows - LIP Multi Grout Sand

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy, thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 40: Biogenic Carbon - LIP Multi Grout Sand

| | Unit | Quantity |
|--|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2. | | |

LIP Multi Grout White

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 41: Core environmental impact results for the product LIP Multi Grout White

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,92E-01 | 4,35E-02 | 6,23E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 5,02E-01 | 4,35E-02 | 3,68E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,00E-02 | 3,62E-05 | 2,55E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 4,32E-04 | 1,64E-05 | 5,33E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 3,93E-08 | 1,08E-08 | 1,65E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 3,29E-03 | 1,39E-04 | 2,37E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 6,74E-05 | 2,84E-06 | 1,74E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 4,05E-04 | 3,11E-05 | 3,94E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 4,18E-03 | 3,39E-04 | 3,06E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,74E-03 | 1,34E-04 | 1,13E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 2,20E-06 | 1,04E-07 | 2,28E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 5,24E+00 | 7,08E-01 | 5,05E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,69E+00 | 2,44E-03 | 1,47E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 42: Additional environmental impact results for the product LIP Multi Grout White

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,92E-01 | 4,32E-02 | 4,56E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 2,32E-08 | 5,05E-09 | 1,07E-09 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 3,93E-08 | 1,08E-08 | 1,65E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 4,18E-03 | 3,39E-04 | 3,06E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 3,76E-09 | 4,70E-10 | 3,52E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 4,32E-04 | 1,64E-05 | 5,33E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 3,60E+00 | 5,53E-01 | 3,58E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 43: Resource use - LIP Multi Grout White

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,82E-01 | 9,43E-03 | 7,05E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,77E-01 | 9,43E-03 | 7,05E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,74E+00 | 7,52E-01 | 4,47E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,87E+00 | 7,52E-01 | 4,47E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 9,29E-02 | 2,45E-03 | 1,63E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 44: Waste - LIP Multi Grout White

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,37E-03 | 0 | 2,19E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,85E-02 | 0 | 4,42E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,58E-05 | 0 | 7,88E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 45: Output flows - LIP Multi Grout White

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy. electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy. thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 46: Biogenic Carbon - LIP Multi Grout White

| | Unit | Quantity |
|--|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2. | | |

LIP Multi Grout Black

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding thresholds values, safety margins or risks.

Core environmental impact indicators

Table 47: Core environmental impact results for the product LIP Multi Grout Black

| Results per declared unit | | | | | | | | | |
|---------------------------|---|-----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP- total | kg CO ₂ eq. | 4,88E-01 | 4,35E-02 | 6,21E-02 | 0 | 4,35E-03 | 0 | 5,28E-03 | 0 |
| GWP-fossil | kg CO ₂ eq. | 4,98E-01 | 4,35E-02 | 3,66E-02 | 0 | 4,35E-03 | 0 | 5,27E-03 | 0 |
| GWP-biogenic | kg CO ₂ eq. | -1,03E-02 | 3,62E-05 | 2,54E-02 | 0 | 4,62E-06 | 0 | 5,72E-06 | 0 |
| GWP- luluc | kg CO ₂ eq. | 4,98E-04 | 1,64E-05 | 5,67E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| ODP | kg CFC 11 eq. | 5,31E-08 | 1,08E-08 | 2,34E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| AP | mol H ⁺ eq. | 2,46E-03 | 1,39E-04 | 1,95E-04 | 0 | 1,39E-05 | 0 | 4,95E-05 | 0 |
| EP-freshwater | kg P eq. | 7,52E-05 | 2,84E-06 | 1,78E-05 | 0 | 2,83E-07 | 0 | 4,82E-07 | 0 |
| EP- marine | kg N eq. | 4,07E-04 | 3,11E-05 | 3,95E-05 | 0 | 3,10E-06 | 0 | 1,72E-05 | 0 |
| EP-terrestrial | mol N eq. | 4,30E-03 | 3,39E-04 | 3,12E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| POCP | kg NMVOC eq. | 1,68E-03 | 1,34E-04 | 1,10E-04 | 0 | 1,33E-05 | 0 | 5,48E-05 | 0 |
| ADP-minerals&metals** | kg Sb eq. | 3,18E-06 | 1,04E-07 | 2,77E-07 | 0 | 1,04E-08 | 0 | 1,20E-08 | 0 |
| ADP-fossil** | MJ | 5,28E+00 | 7,08E-01 | 5,07E-01 | 0 | 7,08E-02 | 0 | 1,47E-01 | 0 |
| WDP ** | m ³ | 2,57E+00 | 2,44E-03 | 1,40E-01 | 0 | 2,43E-04 | 0 | 6,62E-03 | 0 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | |

Additional environmental impact indicators

Table 48: Additional environmental impact results for the product LIP Multi Grout Black

| Results per declared unit | | | | | | | | | |
|---------------------------|---|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| GWP-GHG | kg CO ₂ eq. | 4,88E-01 | 4,32E-02 | 4,54E-02 | 0 | 4,32E-03 | 0 | 5,18E-03 | 0 |
| PM | disease inc. | 2,15E-08 | 5,05E-09 | 9,87E-10 | 0 | 5,05E-10 | 0 | 9,97E-10 | 0 |
| IRP* | kBq U235 eq | 5,31E-08 | 1,08E-08 | 2,34E-09 | 0 | 1,08E-09 | 0 | 2,13E-09 | 0 |
| ETP-fw** | CTUe | 4,30E-03 | 3,39E-04 | 3,12E-04 | 0 | 3,39E-05 | 0 | 1,88E-04 | 0 |
| HTP-c** | CTUh | 4,23E-09 | 4,70E-10 | 3,76E-10 | 0 | 4,69E-11 | 0 | 2,55E-11 | 0 |
| HTP-nc** | CTUh | 4,98E-04 | 1,64E-05 | 5,67E-05 | 0 | 1,63E-06 | 0 | 4,97E-06 | 0 |
| SQP** | Dimensionless | 3,49E+00 | 5,53E-01 | 3,53E-01 | 0 | 5,53E-02 | 0 | 9,29E-02 | 0 |
| Acronyms | GWP-GHG: The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013. PM = Particulate Matter emissions; IRP = Ionizing radiation, human health; ETP-fw = Eco-toxicity, freshwater; HTP-c = Human toxicity, cancer effects; HTP-nc = Human toxicity, non-cancer effects; SQP = Land use related impacts/Soil quality. | | | | | | | | |

Use of resources

Table 49: Resource use - LIP Multi Grout Black

| Results per declared unit | | | | | | | | | |
|---------------------------|--|----------|----------|----------|----|----------|----|----------|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| PERE | MJ | 4,97E-01 | 9,43E-03 | 7,12E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PERM | MJ | 1,95E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PERT | MJ | 6,92E-01 | 9,43E-03 | 7,12E-02 | 0 | 9,00E-04 | 0 | 1,25E-03 | 0 |
| PENRE | MJ | 3,84E+00 | 7,52E-01 | 4,52E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| PENRM | MJ | 1,26E-01 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| PENRT | MJ | 3,97E+00 | 7,52E-01 | 4,52E-01 | 0 | 7,52E-02 | 0 | 1,56E-01 | 0 |
| SM | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| RSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| NRSF | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| FW | m3 | 5,92E-02 | 2,45E-03 | 1,46E-02 | 0 | 2,45E-04 | 0 | 6,63E-03 | 0 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water | | | | | | | | |

Waste production

At end of use, when the hardened product is demolished, the LIP Grouts are non-hazardous building waste. The waste from packing material is also assumed to be non-hazardous waste.

Table 50: Waste - LIP Multi Grout Black

| Results per declared unit | | | | | | | | | |
|------------------------------|------|----------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Hazardous waste disposed | kg | 4,22E-03 | 0 | 2,11E-04 | 0 | 0 | 0 | 0 | 0 |
| Non-hazardous waste disposed | kg | 8,54E-02 | 0 | 4,27E-03 | 0 | 0 | 0 | 0 | 0 |
| Radioactive waste disposed | kg | 1,43E-05 | 0 | 7,16E-07 | 0 | 0 | 0 | 0 | 0 |

Output flows

Table 51: Output flows - LIP Multi Grout Black

| Results per declared unit | | | | | | | | | |
|-------------------------------|------|-------|----|----------|----|----|----|----|---|
| Indicator | Unit | A1-A3 | A4 | A5 | C1 | C2 | C3 | C4 | D |
| Components for re-use | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Material for recycling | kg | 0 | 0 | 6,00E-04 | 0 | 0 | 0 | 0 | 0 |
| Materials for energy recovery | kg | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy. electricity | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Exported energy. thermal | MJ | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Information on biogenic carbon content

Table 52: Biogenic Carbon - LIP Multi Grout Black

| | Unit | Quantity |
|--|------|----------|
| Biogenic carbon content in product | kg C | 0 |
| Biogenic carbon content in packaging | kg C | 6,00E-03 |
| Results per functional or declared unit. Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO2. | | |

Additional information

Fossil free energy:

LIP Bygningsartikler A/S has used fossil free energy since 2014. Today, the energy is delivered from the wind turbine power plant at LINDØ port of Odense from Energy Fyn. The total energy consumption on the site is equivalent to 1100 MWh per year.



Information related to Sector EPD

This is an individual EPD.

Differences versus previous versions

03-02-2023 (version 2, this version): The reason for updating the EPD is that based on yearly EPD surveillance plan LIP procured more specific EPD verified data from suppliers and integrated with the processes from the generic LCA software database, leading in more than 10% variation compared to the original version of this EPD.

References

- Project Report - LIP Grouts, LIP Bygningsartikler A/S, 2023
- General Programme Instruction of the International EPD® System. Version 3.01.
- ISO 14025:2010 Environmental labels and declarations-Type III Environmental Declarations-Principles and procedures
- ISO 14040:2006 Environmental management-Life Cycle Assessment-Principles and framework
- ISO 14044:2006 Environmental management-Life Cycle Assessment-Requirements and guidelines
- PCR 2019:14 Construction products (EN 15804:A2) version 1.11
- EN 15804:2012+A2:2019 Sustainability of construction works-Environmental Product Declarations-Core rules for the product category of construction products
- EN 12004:2007+A1:2012 for interior and exterior bonding of ceramic tiles, porcelain, natural stone and mosaics on floors and walls.
- DS/EN 13888 (Grout wall plasters for ceramic tiles - Requirements, conformity assessment, classification and designations).

Programme-related information and verification

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.

| | |
|---------------------------------|--|
| Programme: | The International EPD® System EPD International AB Box 210 60 SE-100 31 Stockholm Sweden www.environdec.com info@environdec.com |
| EPD registration number: | S-P-04249 |
| Published: | 2021-11-02 (version 1) |
| Revised: | 2023-02-03 (version 2) |
| Valid until: | 2026-10-28 (version 1, 2) |

| |
|---|
| CEN standard EN 15804 serves as the Core Product Category Rules (PCR) |
| Product category rules (PCR): PCR 2019:14 Construction products (EN 15804:A2) Version 1.11 |
| PCR review was conducted by: The Technical Committee of the International EPD® System. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat www.environdec.com/contact |
| Independent third-party verification of the declaration and data, according to ISO 14025:2006: <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification |
| Third party verifier: Camilla Landén, Bureau Veritas Certification Sverige AB Accredited by: SWEDAC |
| Procedure for follow-up of data during EPD validity involves third party verifier: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No |

*Disclaimer: This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

**Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

Contact information

EPD owner

LIP Bygningsartikler A/S
 Industrivej 16
 5580, Nørre Aaby, Danmark
info@lip.dk
www.lip.dk



LCA author

Bureau Veritas HSE, Danmark
 Odyssefs Papagiannidis

Oldenborgsgade 25-31
7000, Fredericia, Danmark
www.bvhse.dk
infohse@dk.bureauveritas.com

**BUREAU
VERITAS**

Shaping a World of Trust

Programme operator

the International EPD[®] System
www.environdec.com

THE INTERNATIONAL EPD[®] SYSTEM

3rd party verifiers

First version:
Bureau Veritas Certification
Sverige AB
Camilla Landen
Fabriksgatan 13,
412 50, Göteborg, Sweden
<https://www.bureauveritas.se/>

**BUREAU
VERITAS**

Shaping a World of Trust

Second version:
Bureau Veritas Certification
Sverige AB
Viktor Hakkarainen
Fabriksgatan 13,
412 50, Göteborg, Sweden
<https://www.bureauveritas.se/>

**BUREAU
VERITAS**

Shaping a World of Trust