



Satisfy Professional's Needs

Slide Compound Saw
LS1018L, LS1017L 260mm (10-1/4")
255mm (10")

Big Cutting Capacity

310mm X 91mm
(12" X 3-5/8")
with 255mm (10") saw blade



Laser marker



Bevel range



LS1018L




LS1017L

Higher Accuracy Cutting



Laser marker

// Allows for easy cut line alignment.
// Can be turned on/off with an independent switch.



Rubberized soft grip
for more control

Soft Start
for smooth start-ups

Electric Brake
Stops the saw blade rotation for safe operation.

Sliding sub fence
(Left side only)

Holder can be attached to both right and left sides for supporting long stock.

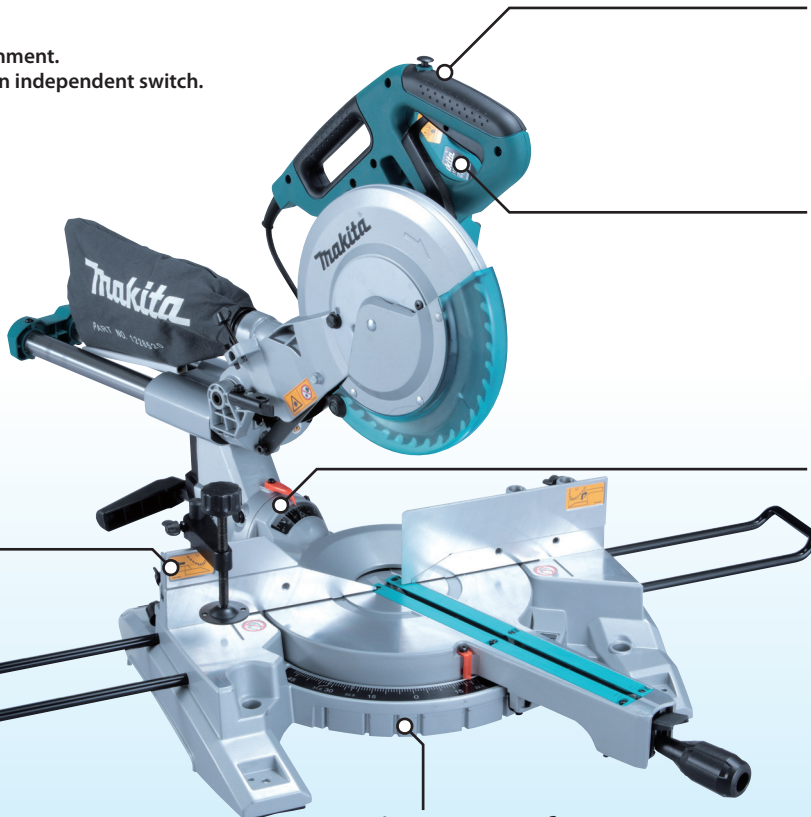


Photo: LS1018L

Miter range of

60 degrees right and 47 degrees left with positive stops at 0, 15, 22.5, 31.6, 45 degrees right and left

Bevel range of:

// LS1017L:
45 degrees left and 5 degrees right



// LS1018L:
45 degrees right and left




Cutting capacities [Height x Width in mm] with 260mm (10-1/4") saw blade

*with 255mm (10") saw blade

	Bevel Cut at 45° left	Cross Cut	Bevel Cut at 45° right (LS1018L only)
Miter at 0°	 50 x 310 mm *50 x 305 mm (2" x 12")	 91 x 310 mm *91 x 305 mm (3-5/8" x 12")	 31 x 310 mm *31 x 305 mm (1-1/4" x 12")
Miter at 45°	 left 50 x 200 mm *50 x 200 mm (2" x 7-7/8") Right 50 x 220 mm *50 x 215 mm (2" x 8-1/2")	 91 x 220mm *91 x 215mm (3-5/8" x 8-1/2")	 31 x 220 mm *31 x 215 mm (1-1/4" x 8-1/2")
Miter at 60°		 91 x 153 mm *91 x 150 mm (3-5/8" x 5-7/8")	

Slide Compound Saw

- Double Insulation
- Soft Start
- Brake
- Bevel Cutting 45 LR (LS1018L)
- Bevel Cutting L45 R5 (LS1017L)
- Laser Marker

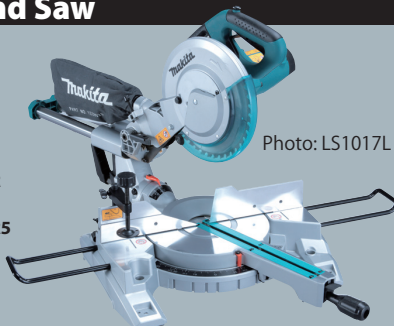

LS1018L, LS1017L

260mm (10-1/4")
255mm (10")

JM23100183

Continuous rating Input	1,430W
Max cutting capacity Blade diameter 260mm	at 0 degrees : 91 x 310mm
Bevel Cut at 45° left, Miter at 45° right	at 45 degrees : 91 x 220mm
Blade diameter 255mm	at 0 degrees : 91 x 305mm (3-5/8" x 12")
Bevel Cut at 45° left, Miter at 45° right	at 45 degrees : 91 x 215mm (3-5/8" x 8-1/2")
Blade diameter	255 - 260mm (10" - 10-1/4")
No load speed (rpm)	LS1018L : 4,300 LS1017L : 4,200
Dimensions (L x W x H)	LS1018L : 536 x 825 x 633mm (21-1/8" x 32-1/2" x 25")
	LS1017L : 536 x 825 x 581mm (21-1/8" x 32-1/2" x 22-7/8")
Net weight*	LS1018L : 19.9kg (43.9lbs) LS1017L : 19.5kg (43.0lbs)
Power supply cord	2.5m (8.2ft)
Standard Equipment	*weight according to EPTA-Procedure 01/2003
Carbide-Tipped Saw Blade, Vertical Vise, Socket Wrench, Triangular Rule, Dust Bag, Holder Assembly	

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BA-AG